

Buy it for looks. Buy it for life.®

There is more than 1 version of this model. Page down to identify the version you have.

DESCRIPTION

- Metal construction with various finishes identified by suffix
 24" flexible supply lines with 3/8" compression fittings
- 24" flexible supply lines with 3/8" com OPERATION
- Lever style handle
- Temperature controlled by 100° arc of handle travel

FLOW

- Flow is limited to 1.5 gpm max (5.7L/min) at 60 psi
- CARTRIDGE
- 1255[™] Duralast[™] cartridge
 Nonmetallic/nonferrous and ceramic material


STANDARDS

- Third party certified to WaterSense,[®] ASME A112.18.1/CSA B125.1, NSF 61/9 and all applicable requirements referenced therein
- Contains no more than 0.25% weighted average lead content
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- ADA E for lever handle

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations


Specifications



LEVEL[™] Single-Handle Vessel Lavatory Faucet

Models: 6111 series

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THRU 1 HOLE, 1-1/4" MIN. DIA.

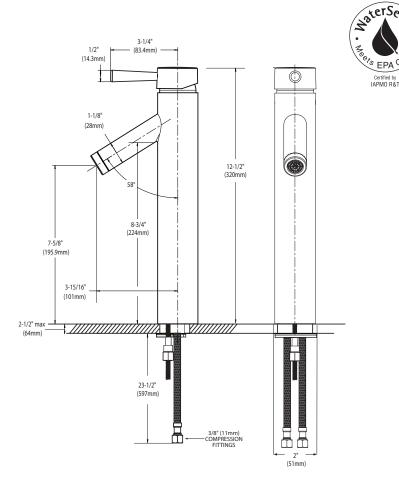

CRITICAL DIMENSIONS

(DO NOT SCALE)

50000123676

SPC10906

Schaod 02

Buy it for looks. Buy it for life.®

Specifications

DESCRIPTION

Metal construction with various finishes identified by suffix
24" flexible supply lines with 3/8" compression fittings

OPERATION


- Lever style handle
- Temperature controlled by 100° arc of handle travel

FLOW

- Flow is limited to 1.5 gpm max (5.7L/min) at 60 psi
- CARTRIDGE
- 1255™ Duralast™ cartridge
- Nonmetallic/nonferrous and ceramic material
- STANDARDS
- Third party certified to WaterSense,[®] ASME A112.18.1/CSA B125.1, NSF 61/9 and all applicable requirements referenced therein
- Contains no more than 0.25% weighted average lead content
- Complies with California Proposition 65 and with the Federal Safe
 Drinking Water Act
- ADA 🛃 for lever handle

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations




LEVEL[™] Single-Handle Vessel Lavatory Faucet

Models: 6111 series

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THRU 1 HOLE, 1-1/4" MIN. DIA.

e

Certified by IAPMO R&T

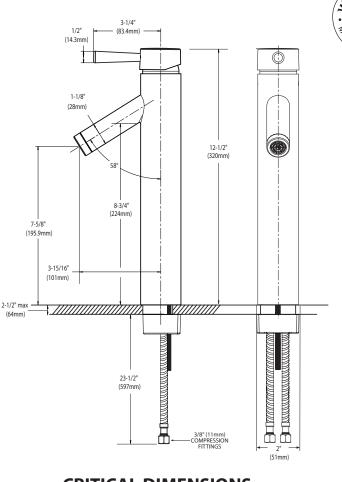

CRITICAL DIMENSIONS

(DO NOT SCALE)

Buy it for looks. Buy it for life.®

Specifications

DESCRIPTION


- Metal construction with various finishes identified by suffix
 24" flexible supply lines with 3/8" compression fittings
- OPERATION
- Lever style handle
- Temperature controlled by 110° arc of handle travel
- FLOW
- Flow is limited to 1.5 gpm max (5.7L/min) at 60 psi, for products made before October 2008 flow is limited to 2.2 gpm max (8.3 L/min)
 CARTRIDGE
- Ceramic cartridge design
- Nonmetallic/nonferrous and ceramic material

STANDARDS

- Third party certified to WaterSense,[®] ASME A112.18.1/CSA B125.1, NSF 61/9 and all applicable requirements referenced therein
- Complies with California Proposition 65 and with the Federal Safe
 Drinking Water Act
- ADA 🛃 for lever handle

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations




LEVEL[™] Single-Handle Vessel Lavatory Faucet

Models: 6111 series

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THRU 1 HOLE, 1-1/4" MIN. DIA.

e

IAPMO R&1

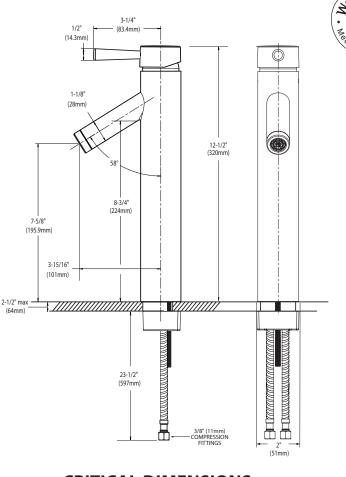

CRITICAL DIMENSIONS

(DO NOT SCALE)