



Buy it for looks. Buy it for life.®

Specifications

FAUCET DESCRIPTION

- Metal construction with various finishes identified by suffix
- Flexible supplies with 3/8" compression fittings
- Includes side spray with Duralock™ quick connect system

OPERATION

- Lever style handle
- Operates with less than 5 lbs. of force

FLOW

- Spout flow is limited to 1.5 gpm max (5.7 L/min) at 60 psi max

CARTRIDGE


- 1255 cartridge design
- Nonmetallic/nonferrous and stainless steel material

STANDARDS

- Third party certified to IAPMO Green, ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein including ANSI/NSF 61/9 & 372
- Meets CalGreen and Georgia SB370 requirements
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- ADA ♿ for lever handles

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
 - 10 year limited warranty when used in a multifamily installation
 - 5 year limited warranty when used in a commercial installation
- Visit www.moen.com/support for complete details and limitations

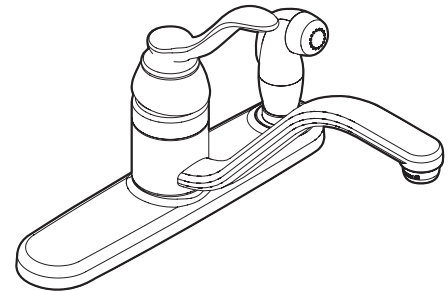

Banbury™ Single-Handle Lever Kitchen Faucet with in Deck Escutcheon Side Spray

Models: 7052

NOTE: DESIGNED TO BE
INSTALLED THROUGH 3 HOLES
1-1/4" (32MM) MIN. DIA.

