

### DESCRIPTION

- Metal construction with various finishes identified by suffix
- Includes 9.5" rainshower showerhead, arm, flange and diverter tub spout

### OPERATION

- Handle operates counterclockwise through a 270° arc with off at 6 o'clock and maximum hot at the 9 o'clock position. Shut off in clockwise direction
- Adjustable temperature limit stop to control maximum hot water temperature
- Pressure balancing mechanism maintains selected discharge temperature to  $\pm 3^\circ$


### FLOW

- Showerhead is limited to 1.75 gpm (6.7L/min) max at 80 psi

### CARTRIDGE

- 1222 cartridge design
- Nonmetallic/nonferrous and stainless steel materials
- Accommodates back to back installations


### STANDARDS

- Third party certified to: ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein
- EP suffix models are IAPMO Green listed and third party certified to WaterSense®
- **ADA**  for lever handles

### WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multifamily installation
- 5 year limited warranty when used in a commercial installation

Visit [www.moen.com/support](http://www.moen.com/support) for complete details and limitations

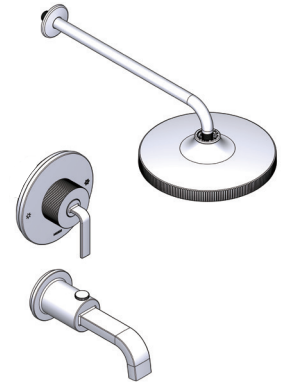

### Cambium™ Single-Handle Posi-Temp® Tub/Shower Trim Kit

**Models:** TS2581 series - valve trim only  
TS2582EP series - shower trim only  
TS2583EP series - tub/shower trim

**Valves:** 62300 series, 2500 series

