

4660-S/4660-T

One-Piece Molded Body

150 PSI/10.3 Bar Non-Shock Cold Working Pressure to 73° F/23° C

NSF STANDARD 14


MATERIAL LIST

PART	SPECIFICATION
1. Handle Cap	ABS
2. Screw	Zinc-plated Steel
3. Handle	ABS
4. O-Ring	EPDM
5. Seat Seal	PTFE, EPDM
6. Ball	PVC
7. Body	PVC




4660-S
Socket Weld

4660-T
Threaded
(not shown)

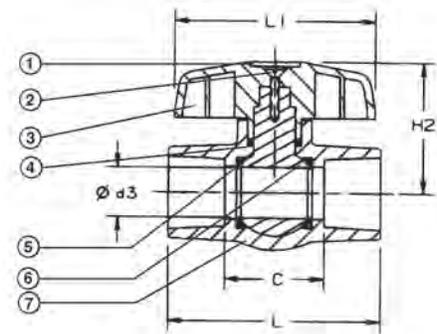

4660-S
Socket x Socket

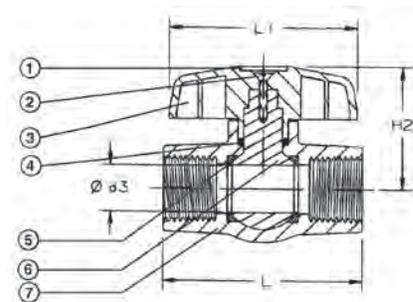

4660-T
Threaded x Threaded

DIMENSIONS—WEIGHTS—QUANTITIES

Size	Dimensions								4660-S		Master Ctn.	Qty.			
	C		d3		H2		L		L1	Lbs.			Kg.		
In.	mm.	In.	mm.	In.	mm.	In.	mm.	In.	mm.	In.	mm.	Lbs.	Kg.	Ctn.	Qty.
1/2	15	1.52	38	.55	14	1.69	43	3.27	83	2.76	69	.18	.08	100	
3/4	20	1.74	43	.79	20	2.13	54	3.74	93	3.47	87	.31	.14	100	
1	25	1.92	48	.98	24	2.56	64	4.17	104	3.94	98	.49	.22	100	
1 1/4	32	1.99	50	1.18	29	2.64	66	4.49	112	3.94	98	.57	.25	100	
1 1/2	40	2.37	59	1.42	35	3.07	77	5.12	128	4.29	107	.88	.39	48	
2	50	2.79	70	1.83	46	3.50	87	5.79	145	5.28	132	1.50	.67	48	
2 1/2	65	4.53	113	2.36	59	4.13	103	8.03	201	7.01	175	2.73	1.23	12	
3	80	5.27	132	3.03	76	4.88	122	9.02	225	8.82	220	4.01	1.80	12	
4	100	7.31	183	3.98	99	5.83	146	11.81	295	10.87	272	8.29	3.73	6	

Socket ends per ASTM D 2466

Thread ends per ANSI B1.20.1