



## H-10x70 - Pro-Connect PP-R Pro Ball Valves (PP-RCT)

### H-10170W Series

#### Full Port Forged Brass Ball Valve

w/ Adjustable Packing Gland

Compatible with PP-R & PP-RCT Piping Systems

Lead-Free


#### Certifications

Certified to NSF/ANSI/CAN 61 & 372



Size (in)	Item#	Weight (lbs)	CTN Qty	Case Qty	A	B	C	D	Metric Pipe Size
<b>Female PP-RCT Metric Socket</b>									
					<b>600 PSI - Valve seat/body Maximum pressure rating at 100F. Overall valve pressure rating is determined by intended operating conditions and limitations specific to the system design.</b>				
1/2"	H-101702W	0.59	5	50	0.50	4.13	2.25	3.50	20
3/4"	H-101703W	0.86	5	40	0.75	4.31	2.50	3.50	25
1"	H-101704W	1.58	4	20	1.00	5.19	2.63	4.63	32
1 1/4"	H-101705W	2.45	5	20	1.25	5.75	3.00	4.63	40
1 1/2"	H-101706W	3.40	4	16	1.50	6.38	3.25	5.63	50
2"	H-101707W	4.80	2	8	2.00	7.13	3.50	5.63	63

NO.	DESCRIPTION	MATERIAL
1	Body	Brass With PP-RCT
2	Cap	Brass With PP-RCT
3	Seat	PTFE
4	Ball	Brass HCP
5	Spindle	Brass
6	Packing	PTFE
7	Packing	Brass
8	Lever Handle	Steel CP
9	Handle Jacket	Vinyl
10	Handle Nut	Stainless Steel

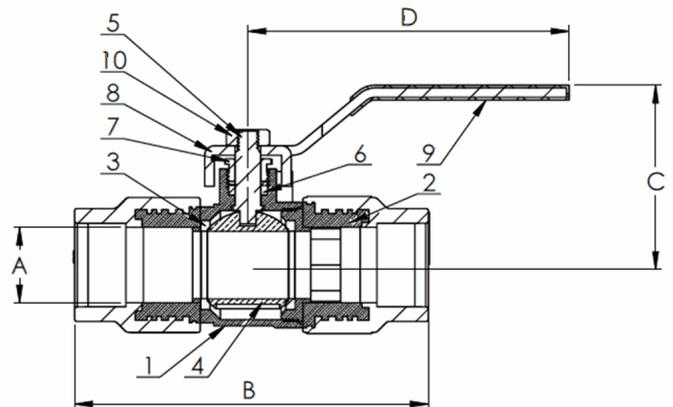

Specifications: Designed for use with water, oil, glycol mix in residential or commercial plumbing and heating systems. Valve seat/body maximum pressure rating at 100 F. Socket dimensions are in accordance with ASTM F 2389 Metric Series. Imperial nominal diameter is provided as reference only. Overall pressure rating is determined by system design.



## H-10x70 - Pro-Connect PP-R Pro Ball Valves (PP-RCT)

### H-10470W Series

### Full Port Forged Brass Ball Valve

w/ Adjustable Packing Gland

Compatible with PP-R & PP-RCT Piping Systems

Lead-Free


### Certifications

Certified to NSF/ANSI/CAN 61 & 372



Size (in)	Item#	Weight (lbs)	CTN Qty	Case Qty	A	B	C	D	Metric Pipe Size
<b>Female PP-RCT Metric Socket x FIP</b>					<b>600 PSI - Valve seat/body Maximum pressure rating at 100F. Overall valve pressure rating is determined by intended operating conditions and limitations specific to the system design.</b>				
1/2"	H-104702W	0.53	5	50	0.50	3.25	2.25	3.50	20
3/4"	H-104703W	0.79	5	40	0.75	3.50	2.50	3.50	25
1"	H-104704W	1.39	4	20	1.00	4.00	2.63	4.38	32
1 1/4"	H-104705W	2.07	5	20	1.25	4.63	3.00	4.38	40
1 1/2"	H-104706W	3.08	4	16	1.50	5.13	3.25	5.38	50
2"	H-104707W	4.29	2	8	2.00	5.75	3.50	5.38	63

NO.	DESCRIPTION	MATERIAL
1	Body	Brass With PP-RCT
2	Cap	Brass
3	Seat	PTFE
4	Ball	Brass HCP
5	Spindle	Brass
6	Packing	PTFE
7	Packing	Brass
8	Lever Handle	Steel CP
9	Handle Jacket	Vinyl
10	Handle Nut	Stainless Steel

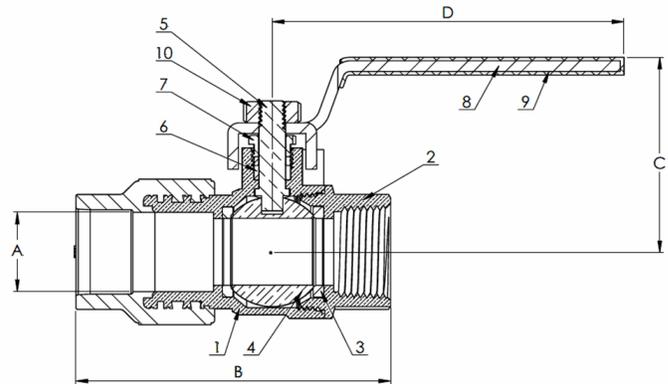

Specifications: Designed for use with water, oil, glycol mix in residential or commercial plumbing and heating systems. Valve seat/body maximum pressure rating at 100 F. Threaded (NPT) ends comply with ANSI B1.20.1. Socket dimensions are in accordance with ASTM F 2389 Metric Series. Imperial nominal diameter is provided as reference only. Overall pressure rating is determined by system design.

