




H-7x32W Series

Water Heater Tempering Valve w/ Temperature Gauge & By-Pass
 Forged DZR Brass Valve
 w/ 1/8" Flex Hose Connector, Temperature Gauge
 Integral Check Valves & Tempering By-Pass Valve
 Outlet Temperature Range 86°-120°F

Certifications
 Lead-Free
 Certified to NSF/ANSI 61 & 372, ASSE 1017 & 1070

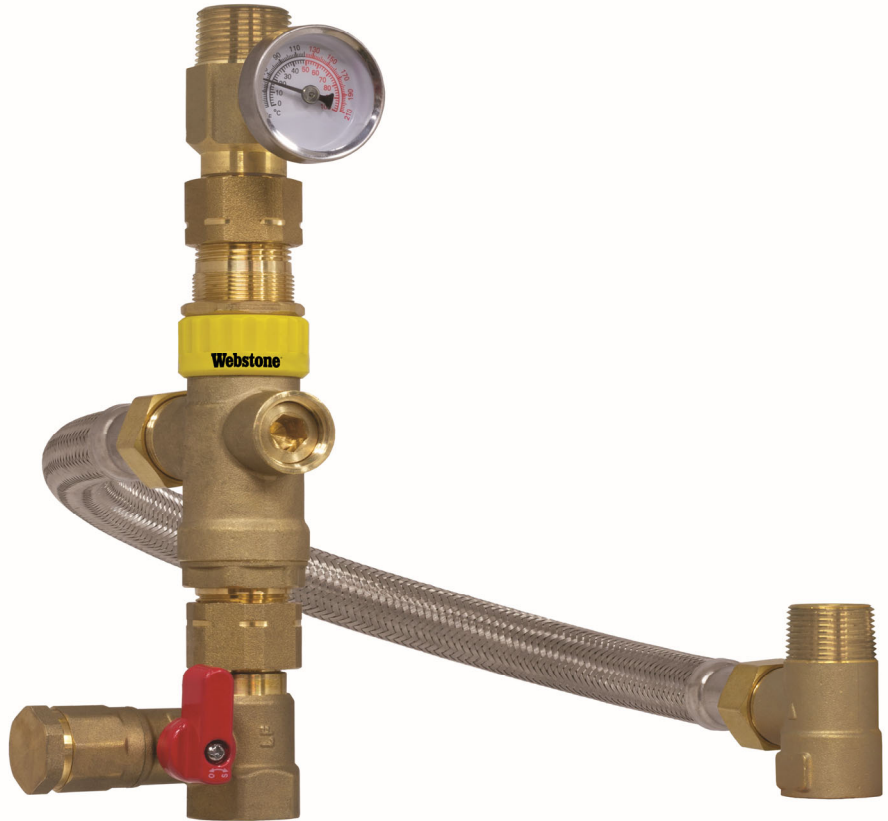

ITEM#	Connection Type	SIZE (In)	Carton Qty	Case Qty	Pressure Rating	Max Temp
H-74323W	MIP × FIP	3/4	1	9	150 PSI CWP Max	194 °F Max
H-78323W	Press × FIP	3/4	1	9	150 PSI CWP Max	194 °F Max