



## H-86x4W Series

Forged DZR Brass 90° Transition Elbow




NO.	DESCRIPTION	MATERIAL
1	Body	Lead-Free DZR Brass
2	O-ring	EPDM

### Certifications

Certified to NSF/ANSI 61 & 372 - PS117

Lead-Free

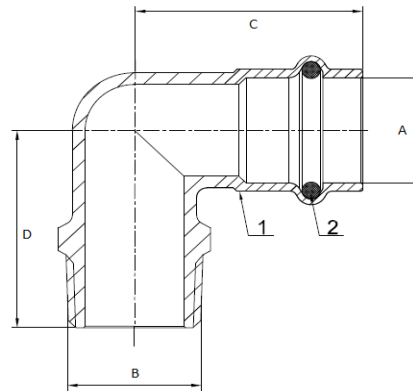

Designed for residential, commercial, or industrial use with water, oil, or glycol mix. Threaded ends comply with ANSI B1.20.1.

ITEM#	Connection Type	SIZE (in)	Max Temp	Pressure Rating	A	B	C	D
H-86242W	Press x MIP	1/2"	250° F Max	250 PSI CWP Max	0.50	0.50 NPT	1.54	1.40
H-86242W-R	Press x MIP	1/2" x 3/8"	250° F Max	250 PSI CWP Max	0.50	0.38 NPT	1.48	1.18
H-86242W-RX	Press x MIP	1/2" x 3/4"	250° F Max	250 PSI CWP Max	0.50	0.75 NPT	1.67	1.50
H-86243W	Press x MIP	3/4"	250° F Max	250 PSI CWP Max	0.75	0.75 NPT	1.77	1.65
H-86243W-R	Press x MIP	3/4" x 1/2"	250° F Max	250 PSI CWP Max	0.75	0.50 NPT	1.77	1.50
H-86243W-RX	Press x MIP	3/4" x 1"	250° F Max	250 PSI CWP Max	0.75	1.00 NPT	1.95	1.77
H-86244W	Press x MIP	1"	250° F Max	250 PSI CWP Max	1.00	1.00 NPT	2.20	1.81
H-86244W-R	Press x MIP	1" x 3/4"	250° F Max	250 PSI CWP Max	1.00	0.75 NPT	2.01	1.65
H-86442W	Press x FIP	1/2"	250° F Max	250 PSI CWP Max	0.50	0.50 NPT	1.57	1.22
H-86442W-R	Press x FIP	1/2" x 3/8"	250° F Max	250 PSI CWP Max	0.50	0.38 NPT	1.50	1.02
H-86442W-RX	Press x FIP	1/2" x 3/4"	250° F Max	250 PSI CWP Max	0.50	0.75 NPT	1.71	1.42
H-86443W	Press x FIP	3/4"	250° F Max	250 PSI CWP Max	0.75	0.75 NPT	1.79	1.50
H-86443W-R	Press x FIP	3/4" x 1/2"	250° F Max	250 PSI CWP Max	0.75	0.50 NPT	1.67	1.30
H-86443W-RX	Press x FIP	3/4" x 1"	250° F Max	250 PSI CWP Max	1.00	1.00 NPT	1.99	1.59
H-86444W	Press x FIP	1"	250° F Max	250 PSI CWP Max	1.00	1.00 NPT	2.20	1.65
H-86444W-R	Press x FIP	1" x 3/4"	250° F Max	250 PSI CWP Max	1.00	0.75 NPT	2.07	1.57