

H-G010 - G-Series Sediment Filter


H-G010W Series

G-Series Sediment Filter

- Spin-Down Design w/ Integrated Maintenance Functions
- w/ 100 & 50 Mesh Stainless Steel Filters
- Integrated Hose Drain Valve, Pressure Gauge
- Mounting Bracket & Service Tool
- Requires (2) 1" G-Union Fittings (Sold Separately)


Certifications

Certified to NSF/ANSI/CAN 61 & 372

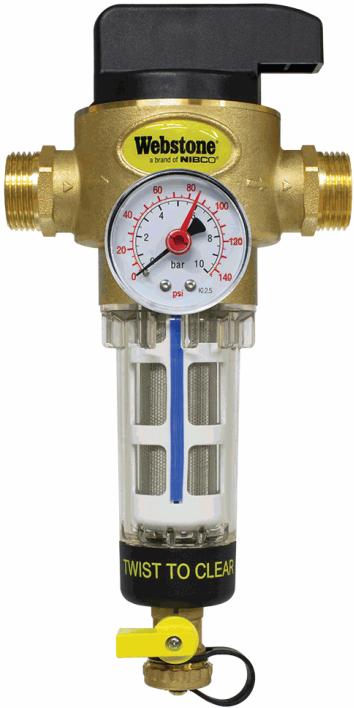


Size (in)	Item#	Weight (lbs)	CTN Qty	Case Qty	A	B	C		
G-Thread								100 PSI CWP	100°F Max
1"	H-G0104W	4.17	1	4	11.24	5.28	5.59		



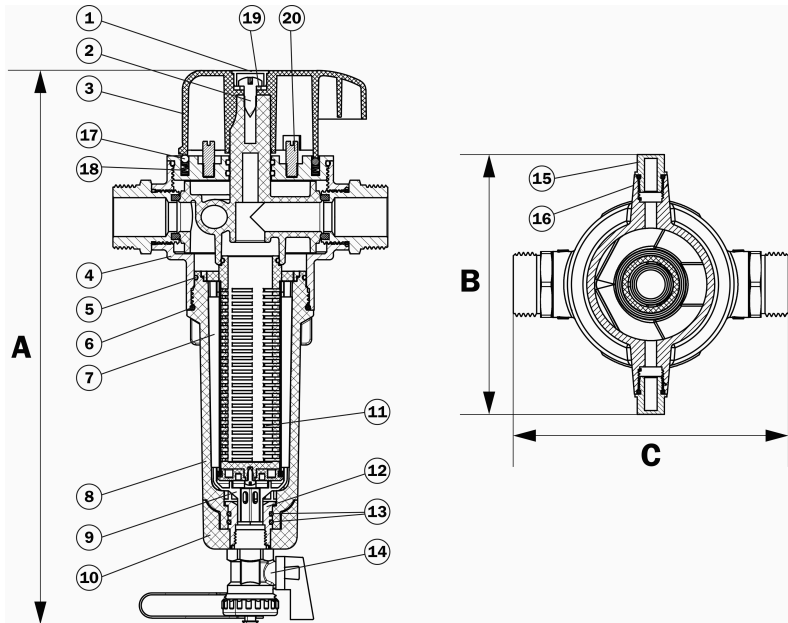

NO.	DESCRIPTION	MATERIAL
1	Cap	Plastic
2	Screw	Stainless Steel
3	Handle	Plastic
4	Body	Lead-Free DZR Brass
5	O-Ring	NBR
6	O-Ring	NBR
7	Wiper	Silicone
8	Transparent housing	Plastic
9	Shield	Plastic
10	Base	Plastic
11	Filter Mesh	Stainless Steel
12	Connector	Lead-Free DZR Brass
13	O-Ring	NBR
14	Drain Valve	Lead-Free DZR Brass
15	Plug	Lead-Free DZR Brass
16	O-Ring	NBR
17	Bead	Stainless Steel
18	Spring	Stainless Steel
19	Lock Washer	Steel
20	Location Pin	Stainless Steel

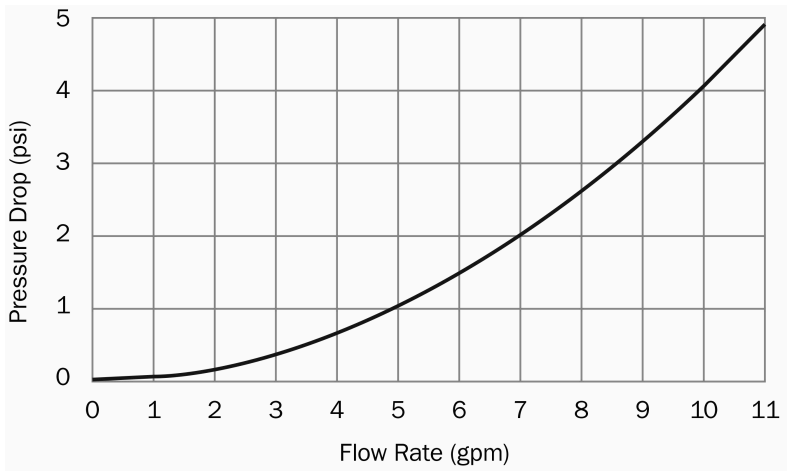

Specifications: Designed for use with water in residential or commercial plumbing systems. 15 PSI minimum system pressure; 40°F minimum operating temperature G-threaded bodies require matching G-union fitting for installation.