

H-G244PR - G-Series Tankless Water Heater Service Valve Kits


H-G244WPR Series

G-Series E-X-P Ultra Compact


Tankless Water Heater Service Valve Kit  
Hot & Cold Set of Full Port Forged DZR Brass Ball Valves  
w/ 3/4" Hose Drains & Pressure Relief Valve Outlet  
w/ Pressure Relief Valve (150 PSI/500,000 BTU/HR)  
Requires (2) G-Union Fittings (Sold Separately)

Certifications

Certified to NSF/ANSI 61 & 372 - Applies to  
base model H-G244W

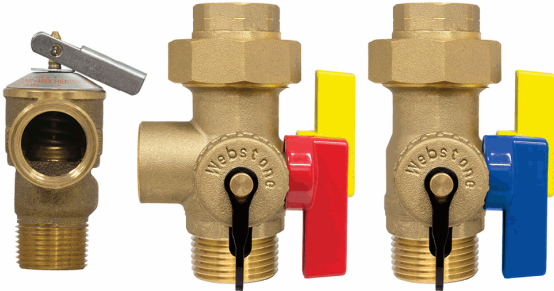


Size (in)	Item#	Weight (lbs)	CTN Qty	Case Qty	A	B	C	D	E	F	G
FIP Union x G-Thread 3/4" x 1"	H-G2444W-RPR	4.03	1	12	0.75	4.30	2.67	3.26	3.80	0.75	PRV
										200 PSI CWP Max	200°F Max

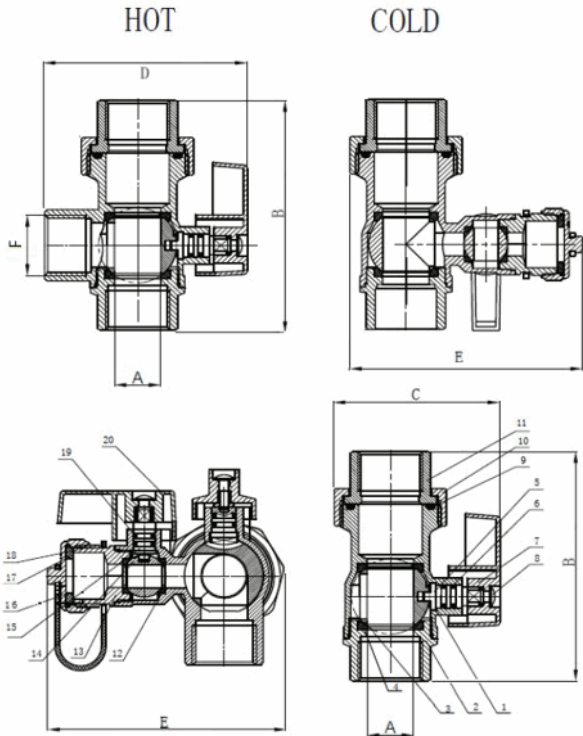

NO.	DESCRIPTION	MATERIAL
1	Body	Lead-Free DZR Brass
2	Cap	Lead-Free DZR Brass
3	Ball	Brass HCP
4	Ball Seat	PTFE
5	Stem	Brass
6	O-Ring	EPDM
7	Lever Handle	Aluminum
8	Screw	Steel
9	O-Ring	EPDM
10	Union Nut	Brass
11	Adaptor	Lead-Free DZR Brass
12	Ball Seat	PTFE
13	Cap	Lead-Free DZR Brass
14	Ball	Brass HCP
15	Stem	Brass
16	Cap	Brass
17	Gasket	EPDM
18	Strap	PVC
19	O-Ring	EPDM
20	Lever Handle	Aluminum

Specifications: Designed for use with water, oil, glycol mix in residential or commercial plumbing and heating systems. Threaded (NPT) ends comply with ANSI B1.20.1. G-threaded bodies require matching G-union fitting for installation.



## H-G244PR - G-Series Tankless Water Heater Service Valve Kits


### H-G244WPR-LF Series

#### G-Series E-X-P Ultra Compact

Tankless Water Heater Service Valve Kit  
Hot & Cold Set of Full Port Forged DZR Brass Ball Valves  
w/ 3/4" Hose Drains & Pressure Relief Valve Outlet  
w/ Lead Free Pressure Relief Valve (150 PSI)  
Requires (2) G-Union Fittings (Sold Separately)

#### Certifications





Certified to NSF/ANSI 61 & 372 - Applies to  
base model H-G244W

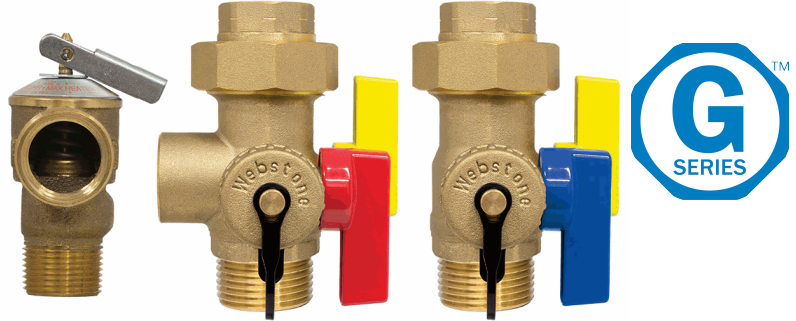

Size (in)	Item#	Weight (lbs)	CTN Qty	Case Qty	A	B	C	D	E	F	G
FIP Union x G-Thread										200 PSI CWP Max	200°F Max
3/4" x 1"	H-G2444W-RPR-LF	4.03	1	12	0.75	4.30	2.67	3.26	3.80	0.75	PRV

HOT

COLD



NO.	DESCRIPTION	MATERIAL
1	Body	Lead-Free DZR Brass
2	Cap	Lead-Free DZR Brass
3	Ball	Brass HCP
4	Ball Seat	PTFE
5	Stem	Brass
6	O-Ring	EPDM
7	Lever Handle	Aluminum
8	Screw	Steel
9	O-Ring	EPDM
10	Union Nut	Brass
11	Adaptor	Lead-Free DZR Brass
12	Ball Seat	PTFE
13	Cap	Lead-Free DZR Brass
14	Ball	Brass HCP
15	Stem	Brass
16	Cap	Brass
17	Gasket	EPDM
18	Strap	PVC
19	O-Ring	EPDM
20	Lever Handle	Aluminum

Specifications: Designed for use with water, oil, glycol mix in residential or commercial plumbing and heating systems. Pressure relief valve rated for 150 PSI/500,000 BTU/HR. Threaded (NPT) ends comply with ANSI B1.20.1. G-threaded bodies require matching G-union fitting for installation.

