



H-X111W Series

Pro-Pal Dielectric Union Ball Drain
 Full Port Forged DZR Brass Ball Valve
 w/ Galvanized Steel Union End, Nylon Insulator Ring,
 Hi-Flow Hose Drain,
 Reversible Handle
 & Dual Stem Seal Design



Certifications

Certified to NSF/ANSI 61 & 372
 Lead-Free



PATENTS PENDING

NO.	DESCRIPTION	MATERIAL
1	O-Ring	EPDM
2	Body	Lead-Free DZR Brass
3	Seat	PTFE
4	O-ring	EPDM
5	Packing	PTFE
6	Packing Gland	Brass
7	Handle	Steel CP
8	Handle Nut	Stainless Steel
9	Lock Washer	Steel
10	Stem	Brass
11	Ball	Brass HCP
12	Cap	Lead-Free DZR Brass
13	Union Nut	Galvanized Steel
14	Gasket	EPDM
15	Insulator Ring	Nylon
16	FIP Fitting	Galvanized Steel
17	Seat	PTFE
18	Ball	Brass HCP
19	Cap	Lead-Free DZR Brass
20	Cap	Brass
21	Gasket	EPDM
22	Strap	NBR
23	Stem	Brass
24	O-ring	EPDM
25	Packing	PTFE
26	Packing Gland	Brass
27	Handle	Aluminum
28	Screw	Stainless Steel

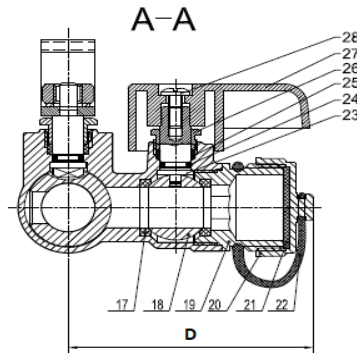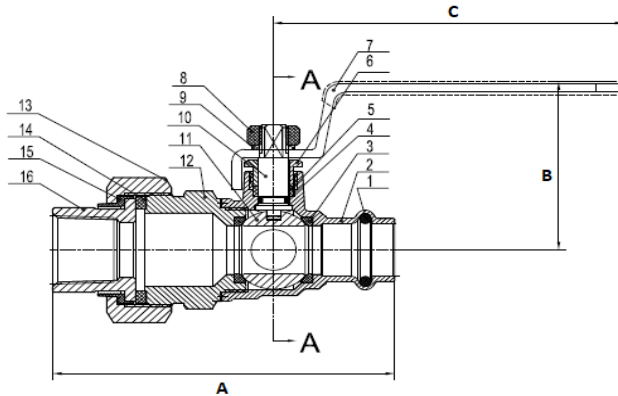

Designed for residential, commercial, or industrial use with water, oil, or glycol mix. This approved Webstone valve is actuated by a blowout proof stem and features an adjustable packing gland. Threaded ends comply with ANSI B1.20.1.

ITEM#	Connection Type	SIZE (In)	Max Temp	Pressure Rating	A	B	C	D
H-81112W	FIP Union x Press	1/2"	200°F Max	250 PSI CWP Max	3.74	2.50	3.50	2.70
H-81113W	FIP Union x Press	3/4"	200°F Max	250 PSI CWP Max	4.09	2.63	3.50	2.78
H-81114W	FIP Union x Press	1"	200°F Max	250 PSI CWP Max	4.49	3.25	3.75	2.81
H-81115W	FIP Union x Press	1 1/4"	200°F Max	250 PSI CWP Max	5.04	2.75	5.16	3.05
H-81116W	FIP Union x Press	1 1/2"	200°F Max	250 PSI CWP Max	5.75	3.25	6.18	3.33
H-81117W	FIP Union x Press	2"	200°F Max	250 PSI CWP Max	6.73	3.50	6.18	3.68