



## H-x165W Series




Pro-Pal Dielectric Water Heater Supply Valve  
 w/ Expansion Tank Service  
 Full Port Forged DZR Brass Ball Valve  
 w/ Dielectric Union End & Hi-Flow Hose Drain  
 1/2 FIP Port, 3/4 FIP Port & 1/8 Plugged FIP Port

### Certifications

Certified to NSF/ANSI 61 & 372  
 Lead-Free



NO.	DESCRIPTION	MATERIAL
1	Body	Lead-Free DZR Brass
2	Cap	Lead-Free DZR Brass
3	Ball	Stainless Steel
4	Seat	PTFE
5	Stem	Lead-Free DZR Brass
6	O-ring	EPDM
7	Handle	Aluminum
8	Screw	Stainless Steel
9	Cap	Lead-Free DZR Brass
10	Ball	Stainless Steel
11	End Cap	Lead-Free DZR Brass
12	Plug	Lead-Free DZR Brass
13	Cap	HPb59-
14	Gasket	EPDM
15	Strap	Plastic
16	Support Bracket	Steel CP
17	Thread Rod	Steel CP
18	Nut	Steel CP
19	Union Nut	Zinc Plated Steel
20	FIP Fitting	Zinc Plated Steel
21	Insulator Ring	PSU
22	Gasket	EPDM
23	Handle	Aluminum

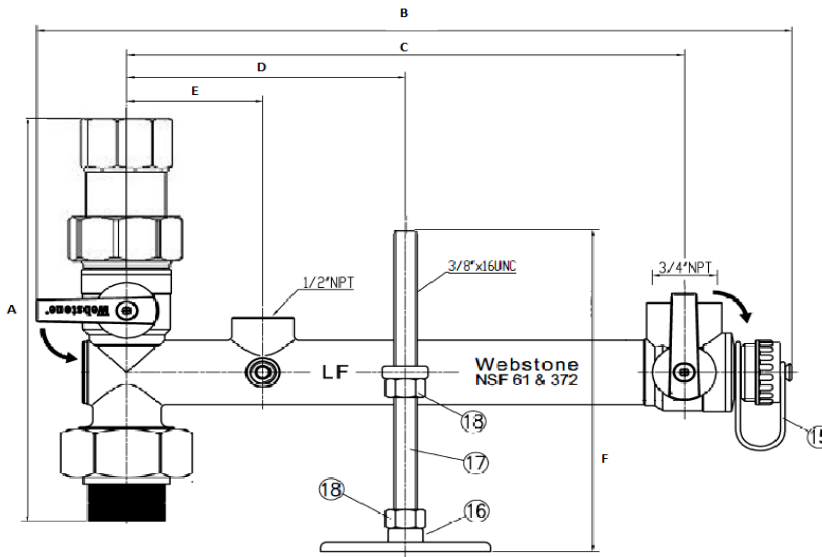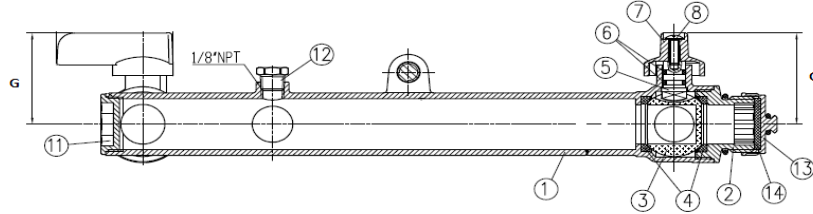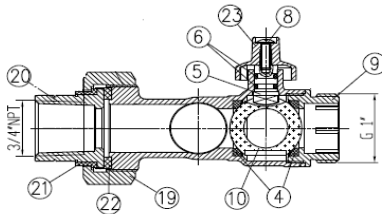

Designed for residential, commercial, or industrial use with water. This approved Webstone valve is actuated by a blowout proof stem. Threaded ends comply with ANSI B1.20.7. Hose ends comply with ANSI B1.20.7.

ITEM#	Connection Type	SIZE (in)	Max Temp	Pressure Rating	A	B	C	D	E	F	G
H-21653W	FIP Union x MIP	3/4	180°F Max	150 PSI CWP Max	6.82	12.20	9.00	4.50	2.20	6.00	1.72
H-41653W	FIP Union x FIP	3/4	180°F Max	150 PSI CWP Max	6.96	12.20	9.00	4.50	2.20	6.00	1.72
H-51653W	FIP Union x SWT	3/4	180°F Max	150 PSI CWP Max	6.82	12.20	9.00	4.50	2.20	6.00	1.72
H-61653W	FIP Union x Push	3/4	180°F Max	150 PSI CWP Max	7.27	12.20	9.00	4.50	2.20	6.00	1.72
H-81653W	FIP Union x Press	3/4	180°F Max	150 PSI CWP Max	7.72	12.20	9.00	4.50	2.20	6.00	1.72
H-G1653W	FIP Union x G-Thread	3/4	180°F Max	150 PSI CWP Max	5.13	12.20	9.00	4.50	2.20	6.00	1.72