

Patents Pending

H-x266 - Pro-Pal Water Heater Supply Valves

H-x266W Series

Pro-Pal Water Heater Supply Valve

Full Port DZR Brass Ball Valve w/ Union End 1/2" FIP Vacuum Relief Valve Port (2) Plugged FIP Ports (1/2" & 1/8") Requires (1) G-Union Fitting (Sold Separately)

Certifications


Certified to NSF/ANSI 61 & 372



| P | R | 0 | | PA | | |
|---|---|---|---|----|---|--|
| S | Ε | R | 1 | Ε | S | |

| NO. | DESCRIPTION | MATERIAL |
|-----|----------------|---------------------|
| 1 | Body | Lead-Free DZR Brass |
| 2 | Cap | Lead-Free DZR Brass |
| 3 | Ball | Stainless Steel |
| 4 | Seat | PTFE |
| 5 | Stem | Lead-Free DZR Brass |
| 6 | O-ring | EPDM |
| 7 | Handle | Aluminum |
| 8 | Screw | Stainless Steel |
| 9 | Сар | Lead-Free DZR Brass |
| 10 | Plug | Lead-Free DZR Brass |
| 11 | Union Nut | Zinc Plated Steel |
| 12 | FIP Fitting | Lead-Free DZR Brass |
| 13 | Insulator Ring | PSU |
| 14 | Gasket | EPDM |
| 15 | Plug | Lead-Free DZR Brass |

| (in) | item# | (lbs) | Qty | Qty | А | В | C | D | | |
|----------------------|----------|-------|-----|-----|------|------|------|------|-----------------|-----------|
| FIP Union x G-Thread | | | | | | | | | 150 PSI CWP Max | 180°F Max |
| 3/4" x 1" | H-G2663W | 1.83 | 1 | 16 | 4.88 | 4.37 | 2.20 | 1.72 | | |

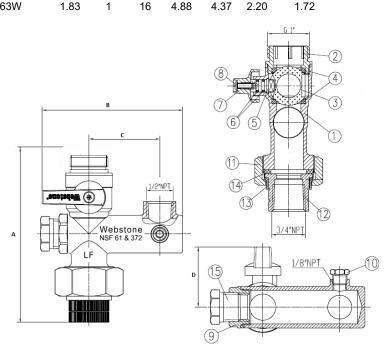

Specifications: Designed for use with water in residential or commercial plumbing systems. Threaded (NPT) ends comply with ANSI B1.20.1. G-threaded bodies require matching G-union fitting for installation.