




H-x410 - Transition Fittings - NPT Unions

H-x410W Series
Forged Brass Union

Certifications
Certified to NSF/ANSI 61 & 372



Size (in)	Item#	Weight (lbs)	CTN Qty	Case Qty	A	B	C		
FIP Union x SWT								200 PSI CWP Max	200°F Max
3/4"	H-54103W	0.40	20	100	0.88	0.75	1.87		

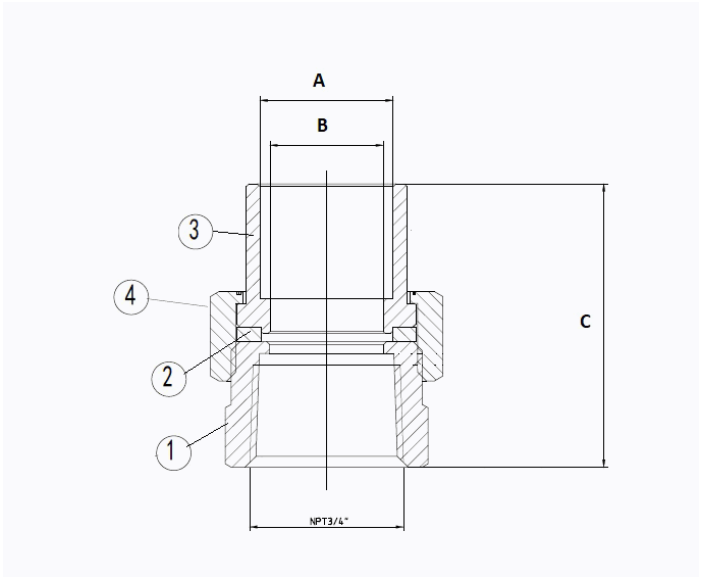

NO.	DESCRIPTION	MATERIAL
1	FIP Fitting	Lead-Free DZR Brass
2	Gasket	EPDM
3	Tailpiece	Lead-Free DZR Brass
4	Union Nut	Lead-Free DZR Brass

Threaded (NPT) ends comply with ANSI B1.20.1. Solder joint temperature ratings are per ASME B16.18 Annex A for 95-5 solder. Do not silver braze or overheat valves when soldering.