




H-x544WPR Series

The Isolator E-X-P E3 Tankless Water Heater Service Valve Kit
 Hot & Cold Set of Full Port Forged Brass Ball Valves
 w/ Hi-Flow Hose Drains,
 Adjustable Pressure Relief Valve Outlet & Adjustable Packing Glands
 Includes Residential Pressure Relief Valve (150 PSI/500,000 BTU/HR)
 Lead Free
 Max Operating Pressure: 500 CWP
 Certified to NSF/ANSI 61 & 372

The ISOLATOR®
E-X-P E3
 TWH SERVICE VALVES
 Patented Technology

| ITEM# | Connection Type | pressure rating | SIZE (in) | Metric Pipe Size | CTN | CASE | A | B | C | D | E | F | G | H |
|------------|-------------------|-----------------|-----------|------------------|-----|------|------|------|------|------|------|------|------|------|
| H-45443WPR | FIP Union x FIP | 500 CWP | 3/4 | 3/4 | 1 | 10 | 0.75 | 4.25 | 5.88 | 1.63 | 2.63 | 2.75 | 0.75 | 0.50 |
| H-55443WPR | FIP Union x SWT | 500 CWP | 3/4 | 3/4 | 1 | 10 | 1.00 | 3.38 | 2.63 | 4.63 | 2.50 | 0.50 | 0.75 | 0.50 |
| H-85443WPR | Press x FIP Union | 250 CWP | 3/4 | 3/4 | 1 | 10 | 0.75 | 6.85 | 1.63 | 2.63 | 2.75 | 0.75 | 0.75 | 0.50 |

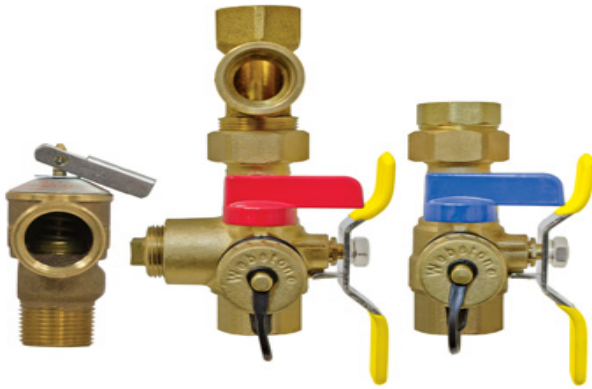

| NO. | DESCRIPTION | MATERIAL |
|-----|--------------------------|------------------------------|
| 1 | Body | Brass |
| 2 | Seats | PTFE |
| 3 | Ball | Brass HCP |
| 4 | Handle Nut | Stainless Steel |
| 5 | Wing Style "T" Handle | Steel CP |
| 6 | Handle Jacket | Vinyl |
| 7 | Packing Gland | Brass |
| 8 | Stem Seal | PTFE |
| 9 | Stem | Brass |
| 10 | End Cap | Brass |
| 11 | Union Nut | Brass |
| 12 | Retaining Ring | Stainless Steel |
| 13 | Union Fitting | Brass |
| 14 | Washer | EPDM |
| 15 | Drain Valve Handle | Enamel Coated Aluminum |
| 16 | Drain Valve Handle Screw | Stainless Steel |
| 17 | Cap & Strap | Brass w/ EPDM Washer & Strap |
| 18 | Relocation Adaptor (Hot) | Brass |

Designed for residential or commercial use with potable water. This approved Webstone valve is actuated by a blowout proof stem and features an adjustable packing gland. Threaded ends comply with ANSI B1.20.1.

