

200 PSI Butterfly Valves

Cast Iron Body • Extended Neck • Cartridge Seat Liner* • Lug Style

Sizes 2" through 12"

Install between Std. ASME Class 125 flanges†.

Bi-directional dead end service rating without a downstream flange required: 2"-6" 200 PSI, 8" 150 PSI, 10"-12" 100 PSI.

DESIGNED TO MEET MSS SP-67 • NSF/ANSI/CAN 372 CERTIFIED LEAD-FREE* • VACUUM TO 28" MERCURY

MATERIAL LIST

PART	SPECIFICATION
1. Body	Cast Iron, Epoxy coated ASTM A126 CL.B
2. Body Bushing	Bronze ASTM B584 Grade C83600
3. Liner	EPDM Rubber w/Phenolic Backing Buna-N Rubber Nitrile w/Phenolic Backing
4. Stem	Stainless Steel ASTM A582 Type 416
5. Disc	Ductile Iron ASTM A536 Grade 65-45-12 (nylon bonded)
6. Taper Pin (2 pin 6" - 12")	Stainless Steel ASTM A582 Type 416
7. Name Plate	Aluminum
8. Shaft Bushing	Bronze ASTM B584 Grade C83600
9. Stem Seal	Buna-N Rubber Nitrile

DIMENSIONS — WEIGHTS

Size	A	Min.	B	C	G		H	I			
In. mm.	Dia.	Pipe I.D.	Dia.	Dia.	E	F	Body	Seat	Dia.		
2	50	2.08	1.38	3.00	3.94	6.34	1.26	10.75	1.655	1.81	0.496
2 1/2	65	2.54	1.95	3.50	4.72	6.89	1.26	11.65	1.759	1.93	0.496
3	80	3.10	2.66	4.09	5.00	7.13	1.26	12.12	1.780	1.93	0.496
4	100	4.10	3.67	5.32	6.14	7.87	1.26	13.62	2.050	2.18	0.621
5	125	4.85	4.48	6.26	7.48	8.39	1.26	14.65	2.140	2.31	0.745
6	150	6.12	5.84	7.42	8.35	8.90	1.26	15.62	2.195	2.33	0.745
8	200	7.97	7.85	9.38	10.55	10.24	1.77	18.88	2.385	2.52	0.870
10	250	9.86	9.76	11.51	12.79	11.50	1.77	21.26	2.584	2.83	1.120
12	300	11.87	11.72	13.55	15.87	13.27	1.77	24.57	3.029	3.19	1.244

Size	J	K	L	M	R	Q	T	Lug Weight
In. mm.	Dia.	B.C. Dia.	Dia.	Dia.	Dia.	P Dia.	Flats	Lbs. Kg.
2	50	3.00	1.97	0.28	0.75	4.75	4	5/8-11UNC .350 8.6 3.9
2 1/2	65	3.03	1.97	0.28	0.75	5.50	4	5/8-11UNC .350 10.8 4.9
3	80	3.03	1.97	0.28	0.75	6.00	4	5/8-11UNC .350 11.4 5.2
4	100	3.62	2.76	0.39	0.75	7.50	8	5/8-11UNC .437 18.9 8.6
5	125	3.62	2.76	0.39	0.88	8.50	8	3/4-10UNC .500 22.8 10.4
6	150	3.62	2.76	0.39	0.88	9.50	8	3/4-10UNC .500 27.1 12.3
8	200	4.50	4.02	0.47	0.88	11.75	8	3/4-10UNC .625 41.2 18.7
10	250	4.50	4.02	0.47	1.00	14.25	12	7/8-9UNC .812 56.3 25.9
12	300	5.50	4.02	0.47	1.00	17.00	12	7/8-9UNC .875 90.3 41.0

*Note: refer to NIBCO O & M manual for specified installation instructions for optimal performance of cartridge seat valves

†Note: lug style valves- extra care should be used when installing with raised face flanges. Over-tightening can result in broken lugs.

*Weighted average lead content ≤ 0.25%

N-200238

Lug Style
EPDM Liner
Nylon Bonded DI Disc

N-200138

Wafer Style
EPDM Liner
Nylon Bonded DI Disc

N-200248


Lug Style
Buna-N Liner
Nylon Bonded DI Disc

N-200148

Wafer Style
Buna-N Liner
Nylon Bonded DI Disc



Certified to NSF/ANSI/CAN 372

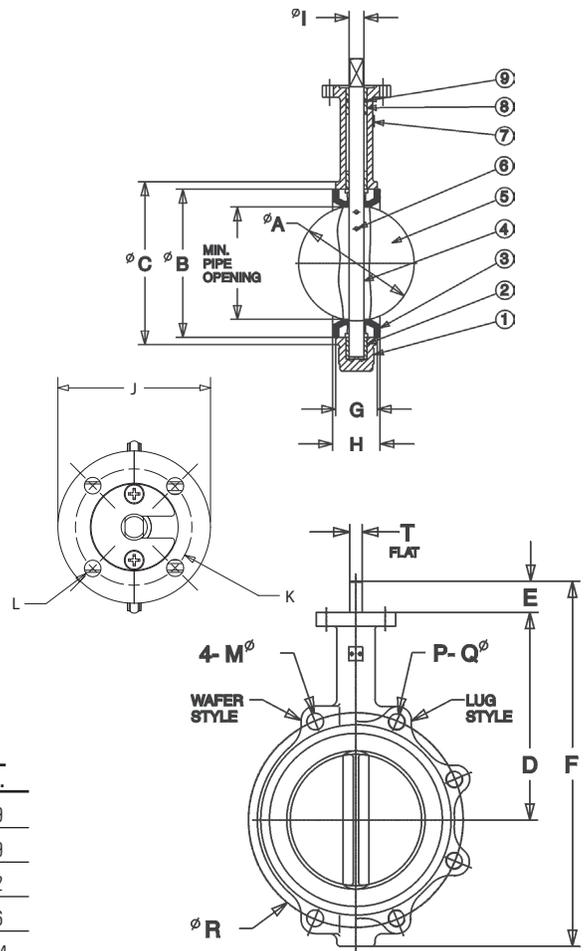

WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

NOT RECOMMENDED FOR STEAM SERVICE

Visit our website for the most current information.