


# Quarter-Turn Boiler Drains

125 lb. CWP to 100°F

Maximum Temperature 180°F

## QUARTER-TURN BOILER DRAINS MATERIAL LIST


PART	SPECIFICATION
Screw	Steel
I.D. Tag	Aluminum
Handle	Zinc
Stem	Brass ASTM B 16 UNS C36000
O-Ring	Nitrile
Seat	PTFE
Ball	Brass ASTM B 16 UNS C36000
Adapter	Brass ASTM B 283 UNS C37700
Body	Brass ASTM B 283 UNS C37700

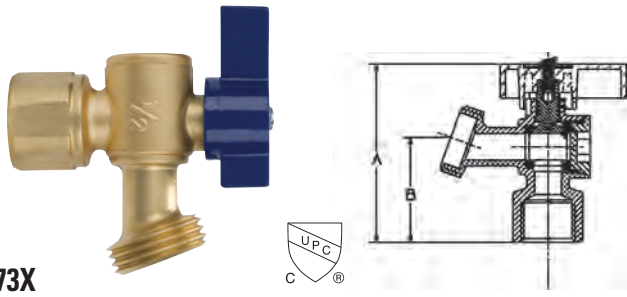

**QT73X**

DESCRIPTION	NOM. SIZE	DIMENSIONS		APPROX. NET WT.
		A	B	
<b>BOILER DRAIN</b> FIP to Hose	1/2	2.64"	1.57"	.42 lb
	3/4	2.72"	1.65"	.46 lb

IAPMO Listed to cUPC®

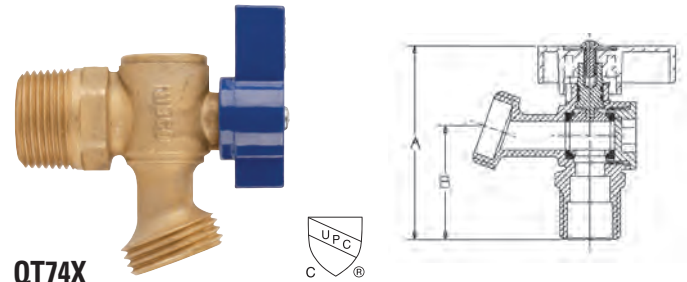

**QT74X**

DESCRIPTION	NOM. SIZE	DIMENSIONS		APPROX. NET WT.
		A	B	
<b>BOILER DRAIN</b> Cup or MIP Threads to Hose	1/2"	2.64"	1.57"	.40 lb
	3/4"*	2.72"	1.65"	.42 lb

IAPMO Listed to cUPC®

\* 3/4" furnished in male threads only



**WARNING:** This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

**NOT FOR USE WITH POTABLE DRINKING WATER APPLICATIONS AFTER JANUARY 3, 2014.**