


TPC-1880SO DZR Brass Automatic Balancing Valve

with Double Union Ends, Test Points and Ball Valve

NPT Threaded End x Press End - 1/2" to 2"

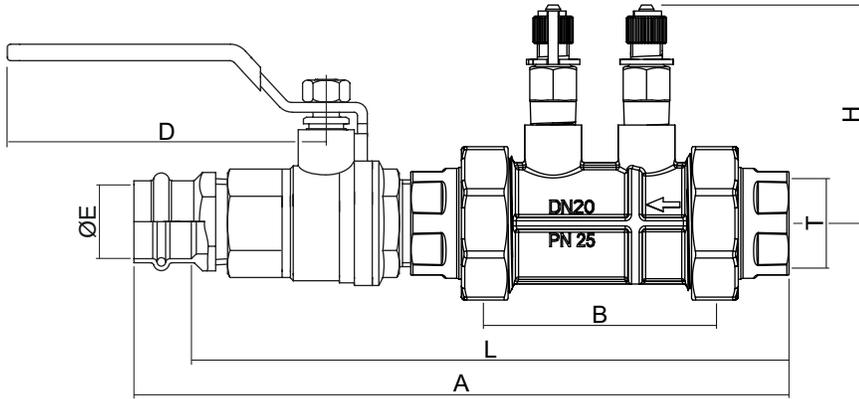

200 PSI Non-Shock Cold Working Pressure
Maximum Temperature 250°F at 150 PSI

Flow Measurement Accuracy ±5%
Balancing Cartridge to be selected based upon specified flow requirements

DIMENSIONS - In.										
Size	A	D	L	B	H	ØE	T - Thread	Cv ¹	Weight Lbs.	Cartridge
1/2"	6.62	3.54	5.93	2.20	2.34	0.63	1/2" - 14 NPT	13.87	1.40	MINI
1/2"	7.17	3.54	6.48	2.76	2.60	0.63	1/2" - 14 NPT	20.81	1.64	SMALL
3/4"	8.11	3.78	7.25	2.76	2.34	0.88	3/4" - 14 NPT	13.87	1.63	MINI
3/4"	7.93	3.78	7.07	2.76	2.60	0.88	3/4" - 14 NPT	20.81	2.04	SMALL
1"	8.37	4.53	7.50	2.76	2.60	1.13	1" - 11.5 NPT	27.74	2.51	SMALL
1 1/4"	10.88	4.53	9.88	4.21	2.87	1.38	1 1/4" - 11.5 NPT	97.10	5.32	MEDIUM
1 1/2"	11.75	5.51	10.38	4.21	2.87	1.63	1 1/2" - 11.5 NPT	97.10	6.56	MEDIUM
2"	14.24	5.51	12.74	4.21	2.87	2.13	2" - 11.5 NPT	92.79	11.97	MEDIUM

¹ Automatic balancing valve body without cartridge

MATERIAL LIST	
PART	SPECIFICATION
Body	Brass - UNS C35330 (DZR)
O-ring	EPDM
Union	Brass - UNS C35330 (DZR)
Tail Piece	Brass ASTM B283 C37700
Test Point (2)	Brass UNS C35330 (DZR)
Tie	Polypropylene Red Color
Tie	Polypropylene Blue Color
Tag and Tie	Aluminium/Plastic
Sticker Label*	Paper
O-ring*	EPDM Peroxide
Regulating Cartridge*	Brass UNS C35330 (DZR) & Stainless St.
Retaining Spring*	Stainless Steel
Ball Valve	Brass UNS C37700
Press End	Copper - ASTM B75 C12200
Press End O-ring	EPDM

CARTRIDGE RANGE & CATEGORY			
Size - In.	Flow Rate	Standard Range	Cartridge Category
1/2" & 3/4"	Low Flow	0.32 - 3.17 GPM	Mini
1/2" & 3/4"	Standard	2.06 - 15.10 GPM	Small
1"	Standard	2.06 - 15.10 GPM	Small
1 1/4"	Standard	4.91 - 41.20 GPM	Medium
1 1/2"	Standard	4.91 - 41.20 GPM	Medium
2"	Standard	4.91 - 41.20 GPM	Medium

Project: _____

Contractor: _____

PO/Job No.: _____

Engineer: _____

Representative: _____

Date: _____

*Regulating Cartridge sold as separate part.