

Features

TOE ACTIVATED DRAIN WITH PIVOTING OVERFLOW

Solid brass construction
Pivoting Decorative Overflow Head
2-hole face plate
Toe -Activated Tub Drain
Maximum make-up distance is 22"
All Parts Polished For Use With Tubs On Legs


111-2962



Codes / Standards Compliance

Meets or exceeds the following at date of manufacture:


ASME A112.18.2/CSA B125.2
IAPMO/cUPC
IPC
All applicable US Federal and State material regulations

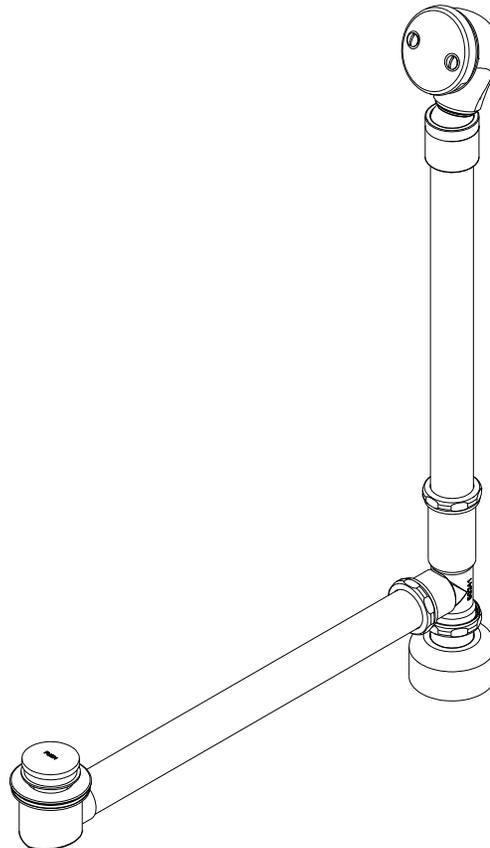

111-2962

PRODUCT DIMENSIONS *(Units are in inches)*

Product Dimensions are provided for reference only. For specific product installation guidelines, please reference the Installation Instructions of the product being installed.

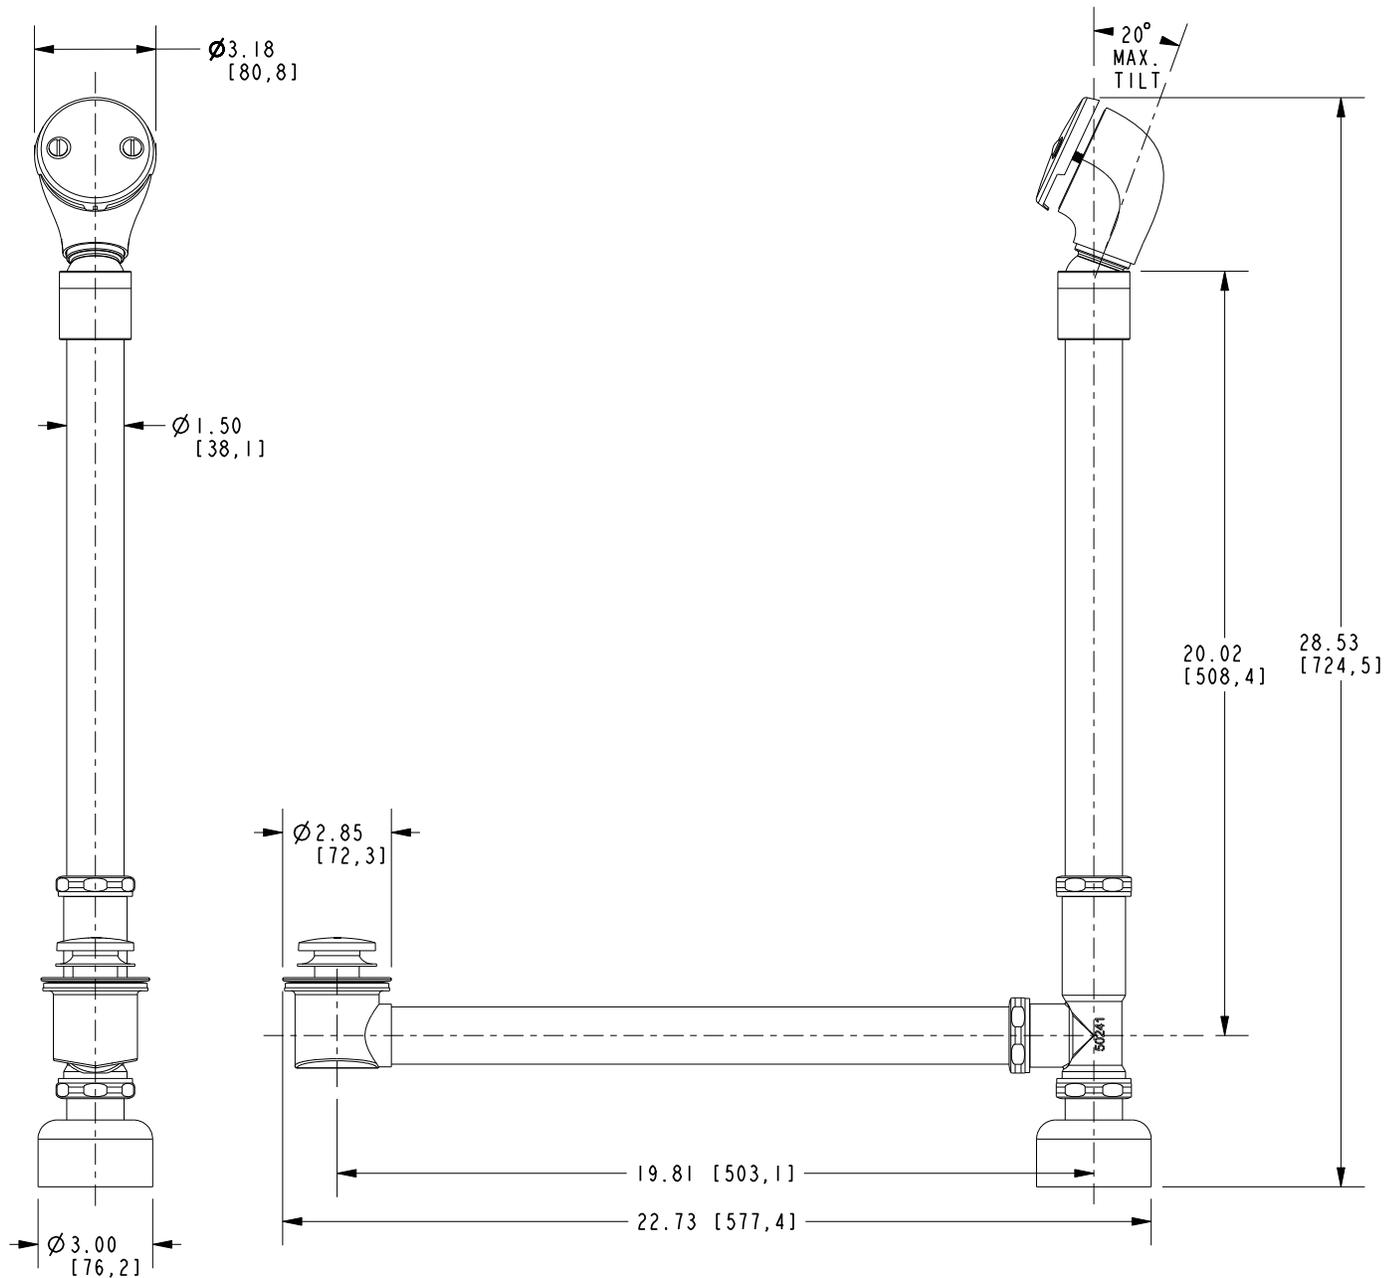

TOE ACTIVATED DRAIN WITH PIVOTING OVERFLOW

111-2962

Page 2 of 2
EN- 5027
REV D

NEWPORT BRASS
Flawless Beauty. From Faucet to Finish.

t: 949.417.5207 | www.newportbrass.com
©2025 NewportBrass