

## Features

Solid brass construction  
 Euro-motion ceramic disc 40 mm valve cartridge  
 9.25 gallons (35 liters) per minute spout maximum flow rate  
 3/4" braided hot and cold supply lines (with 1/2" adapters)  
 37.26" (94.7 cm) tub spout height at outlet  
 8.73" (22.2 cm) tub spout reach (center-center)  
 Contemporary handshower design of brass construction  
 Floor mounting bracket with integral base and escutcheon  
 ADA Compliant (Handles Only)  
 1.8 GPM (6.8 LPM) Max, Handshower Only

## FREESTANDING TUB FILLER


# 3290-4261



## Codes / Standards Compliance

Meets or exceeds the following at date of manufacture:

ASME A112.18.1/CSA B125.1  
 IAMPO/cUPC  
 IPC  
 ADA & ICC/ANSI A117.1 (Handle Only)  
 Energy Policy Act of 1991  
 EPA WaterSense  
 California Energy Commission  
 ASME A112.18.3 (Back Flow)  
 All applicable US Federal and State material regulations

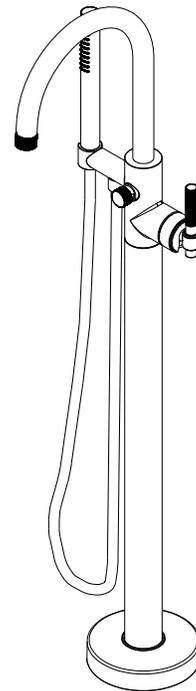


## ACCESSORY OPTIONAL

<b>System Element</b>	Water Supply Rough
<b>Description</b>	Freestanding Tub Fill Rough Kit (Floor Mount)
<b>Inlet/Outlet Size</b>	3/4" NPT / 3/4" NPT
<b>Part Number</b>	1-339
<b>Image</b>	

# 3290-4261

## PRODUCT DIMENSIONS (Units are in inches)

Product Dimensions are provided for reference only. For specific product installation guidelines, please reference the Installation Instructions of the product being installed.

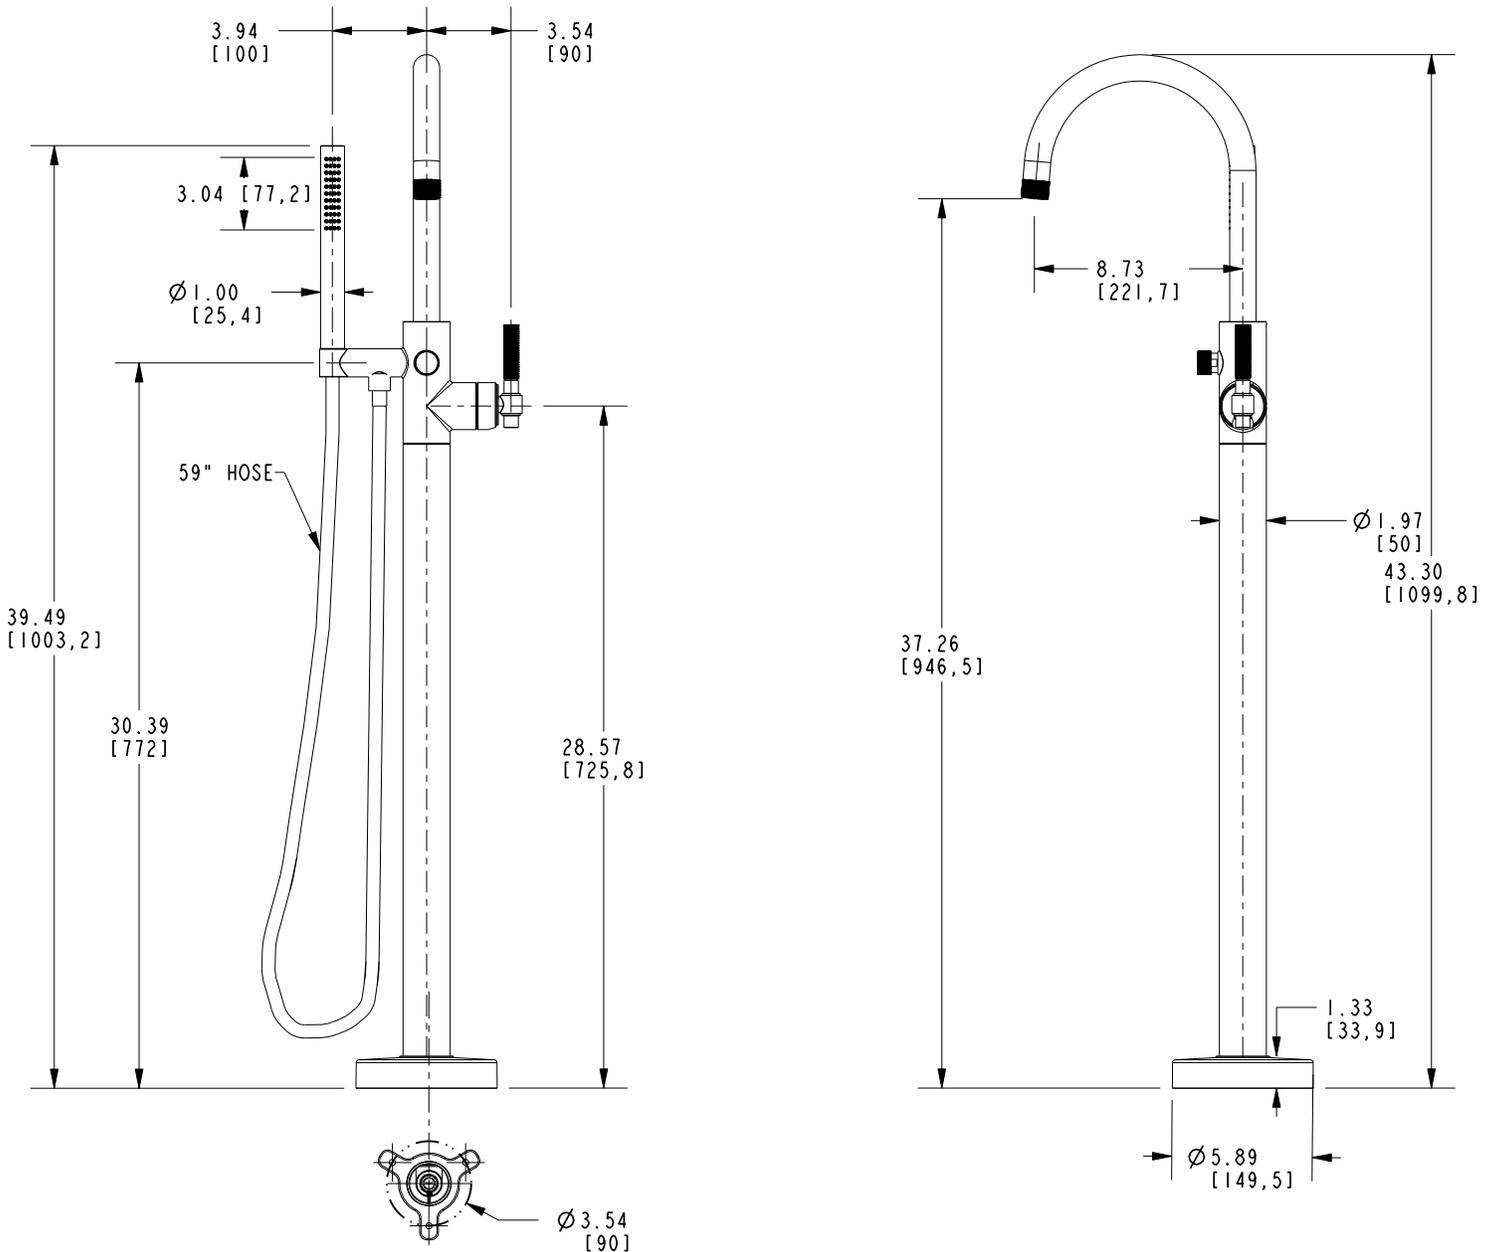

FREESTANDING TUB FILLER

3290-4261

Page 2 of 2  
EN- 4946  
REV C

**NEWPORT BRASS**  
Flawless Beauty. From Faucet to Finish.

t: 949.417.5207 | [www.newportbrass.com](http://www.newportbrass.com)  
©2024 Brasstech, Inc.