

NEWPORT BRASS

KIMBELL

Features

- Solid brass construction
- Quarter-turn washerless ceramic disc valve cartridges
- 12.60" (32.0 cm) tub spout reach (wall-center)
- 3" x 3/4" (7,6 cm x 1,9 cm) hand shower spray area
- For wall mounted configurations
- ADA compliant (handles only)
- 1.8 GPM (6.8 LPM) Max, hand shower only


TUB AND HANDSHOWER SET
3430-4282



Codes / Standards Compliance

Meets or exceeds the following at date of manufacture:

- ASME A112.18.1/CSA B125.1
- IAPMO/cUPC
- IPC
- ADA & ICC/ANSI A117.1 (handle only)
- Energy Policy Act of 1992
- EPA WaterSense
- California Energy Commission
- ASME A112.18.3 (Back Flow) - Double check valves at hand shower inlet
- All applicable US Federal and State material regulations

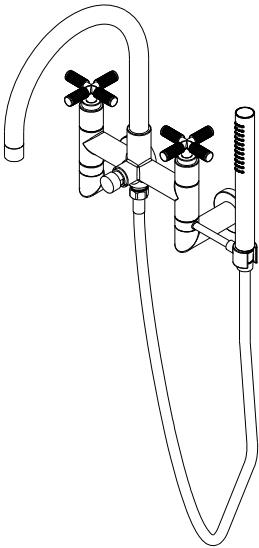


ACCESSORY REQUIRED

System Element	Wall Mount Nipple Kit	Tempering valve
Description	Eccentric Nipple For Wall Mount Tub Filler	Thermostatic mixing valve (Temperature regulator)
Inlet/Outlet Size	1/2" NPT	1/2" direct sweat connections
Part Number	1-483	1-535
Image	A line drawing of the Wall Mount Nipple Kit, showing two eccentric nipples of different lengths.	A line drawing of the Thermostatic mixing valve, showing its complex body with multiple ports and adjustment screws.

NEWPORT BRASS

PRODUCT DIMENSIONS *(Units are in inches)*

Product Dimensions are provided for reference only. For specific product installation guidelines, please reference the Installation Instructions of the product being installed.

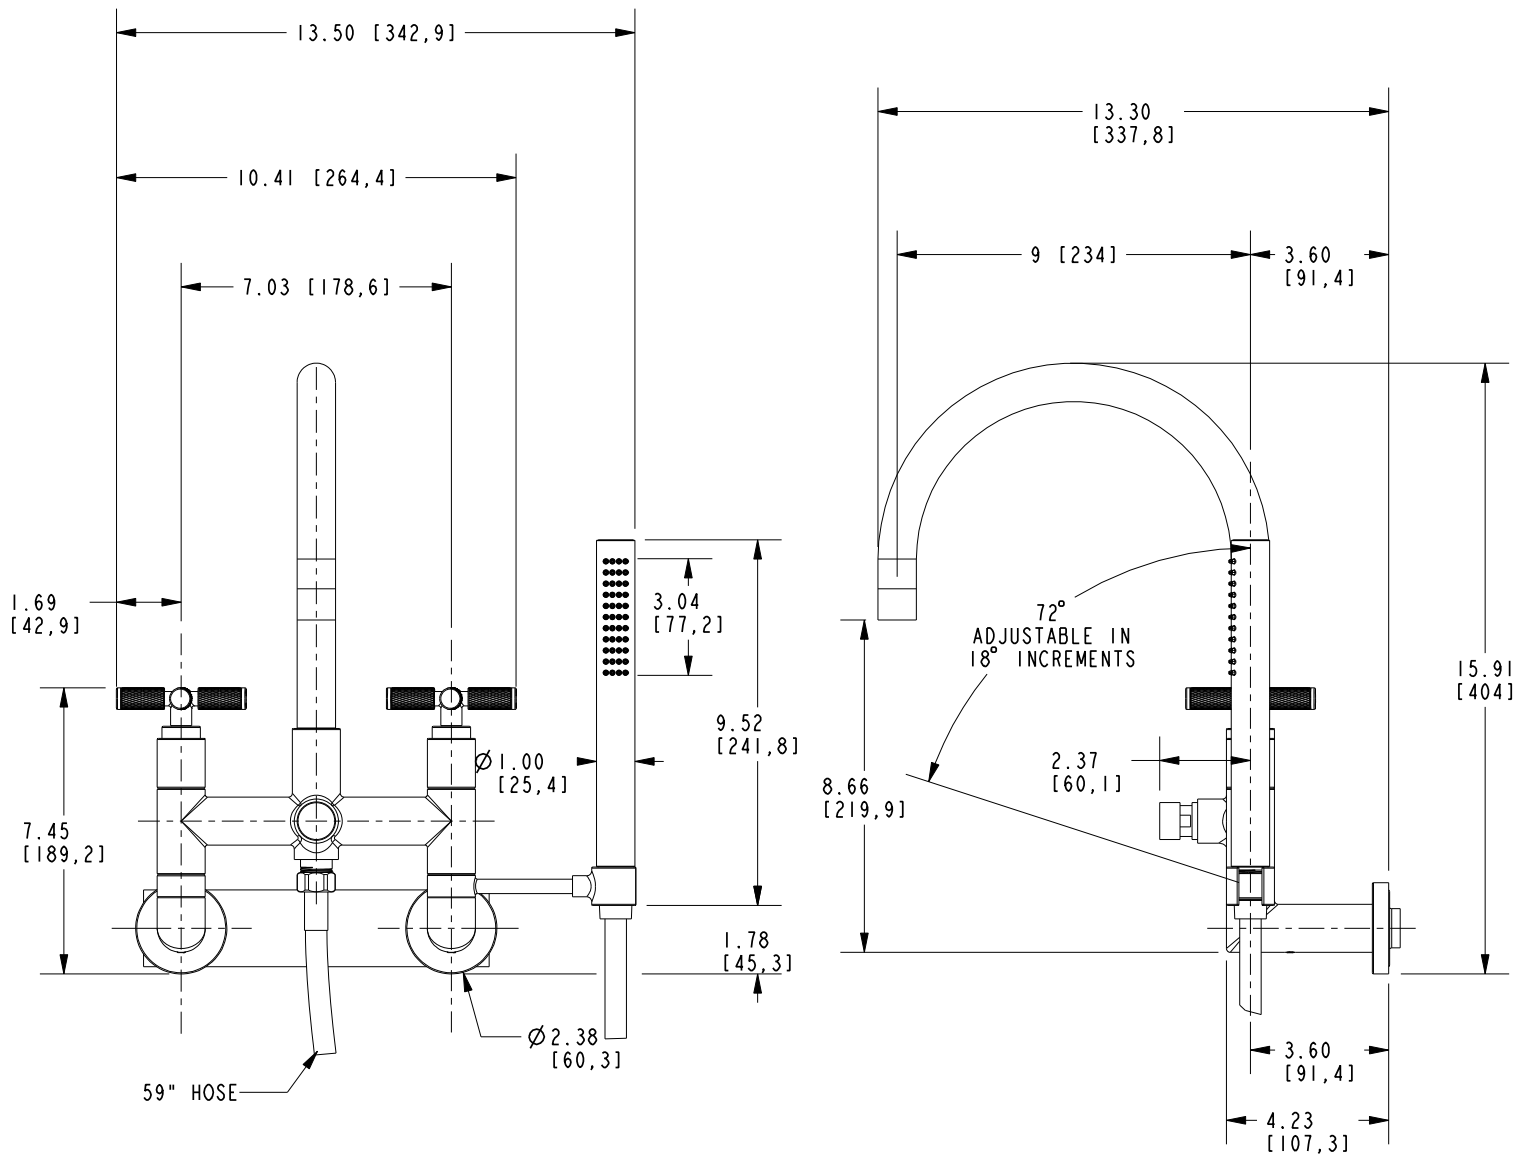

TUB AND HANDSHOWER SET

3430-4282