

Features

Solid brass construction
Brass valve bodies
Quarter-turn washerless ceramic disc valve cartridges
Spout assembly with integral supply hoses
Push Pop-Up drain with tailpiece
5.15" (13.1 cm) spout height at outlet
5.63" (14.3 cm) spout reach (c-c)
For 8" (20.3 cm) centers -Maximum 20" (50.8 cm)
ADA Compliant
1.2 GPM (4.5 LPM) Max

WIDESPREAD FAUCET


3240C



Codes / Standards Compliance

Meets or exceeds the following at date of manufacture:


ASME A112.18.1/CSA B125.1
IAPMO/cUPC
NSF/ANSI/CAN 61, SECTION 9
NSF/ANSI 372
IPC
ADA & ICC/ANSI
Energy Policy Act of 1992
EPA WaterSense
California Energy Commission
All applicable US Federal and State material regulations

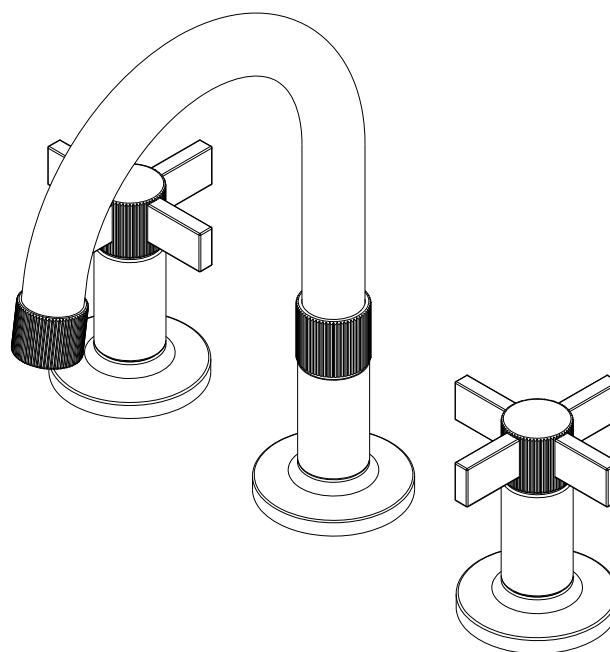

3240C

PRODUCT DIMENSIONS *(Units are in inches)*

Product Dimensions are provided for reference only. For specific product installation guidelines, please reference the Installation Instructions of the product being installed.

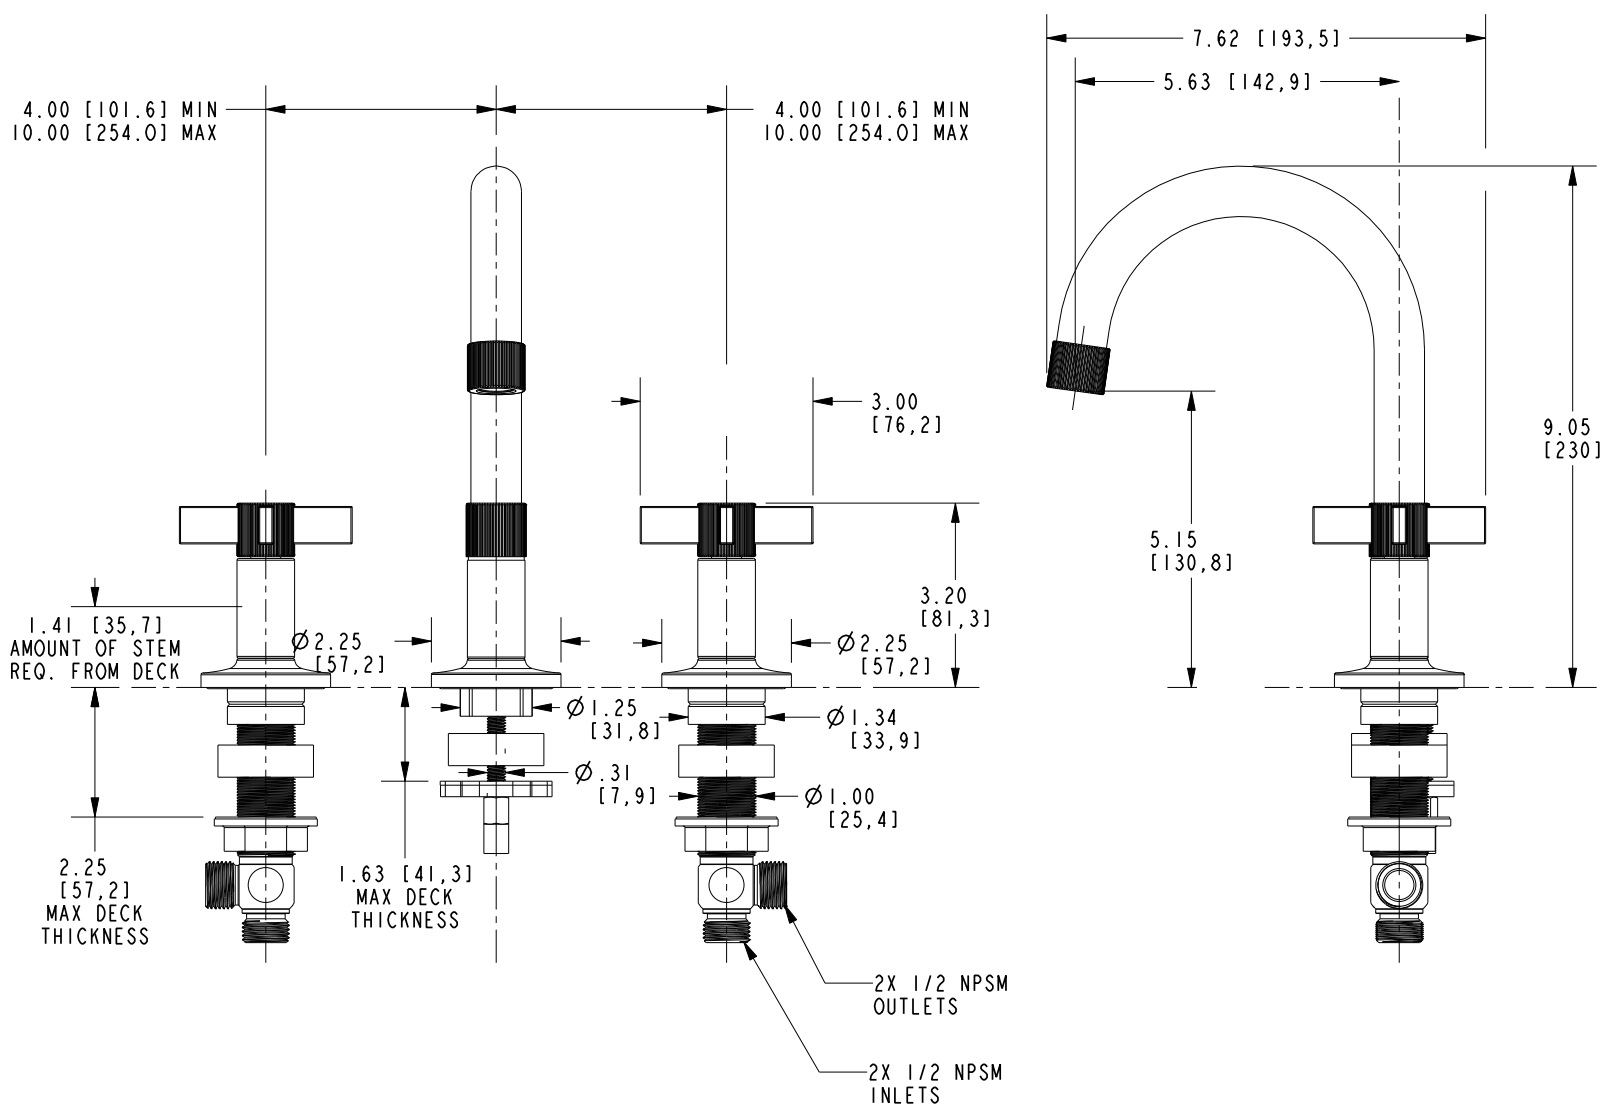

WIDESPREAD FAUCET

3240C

Page 2 of 2

EN- 4793

REV B

NEWPORT BRASS

Flawless Beauty. From Faucet to Finish.

t: 949.417.5207 | www.newportbrass.com

©2024 Brasstech, Inc.