

Features

Solid brass construction
Brass valve bodies
Quarter-turn washerless ceramic disc valve cartridges
Spout assembly with integral supply hoses
Push Pop-Up drain with tailpiece
5.31" (13.5 cm) spout height at outlet
5.67" (14.4 cm) spout reach (c-c)
For 8" (20.3 cm) centers -Maximum 20" (50.8 cm)
ADA Compliant
1.2 GPM (4.5 LPM) Max

WIDESPREAD FAUCET


3250C



Codes / Standards Compliance

Meets or exceeds the following at date of manufacture:


ASME A112.18.1/CSA B125.1
IAPMO/cUPC
NSF/ANSI/CAN 61, SECTION 9
NSF/ANSI 372
IPC
ADA & ICC/ANSI A117.1
Energy Policy Act of 1992
EPA WaterSense
California Energy Commission
All applicable US Federal and State material regulations

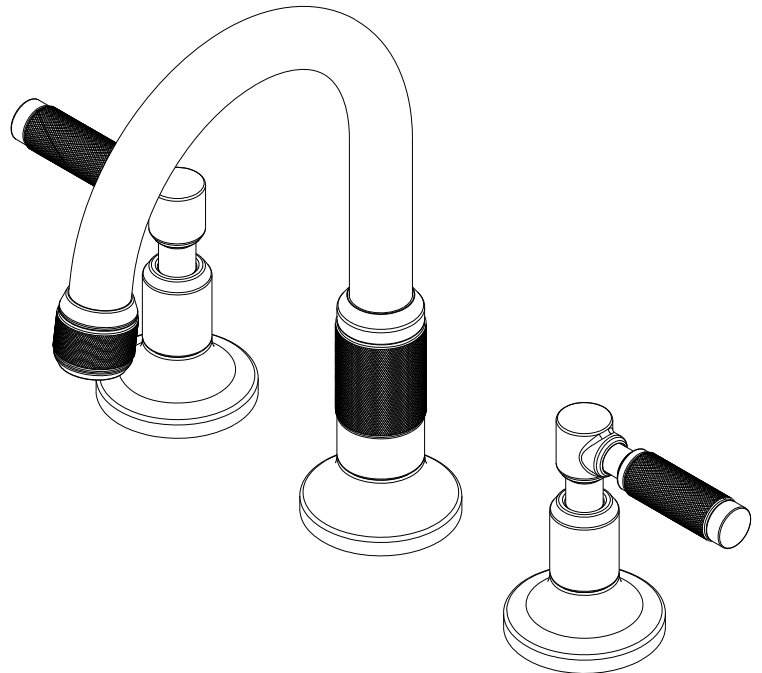

3250C

PRODUCT DIMENSIONS *(Units are in inches)*

Product Dimensions are provided for reference only. For specific product installation guidelines, please reference the Installation Instructions of the product being installed.

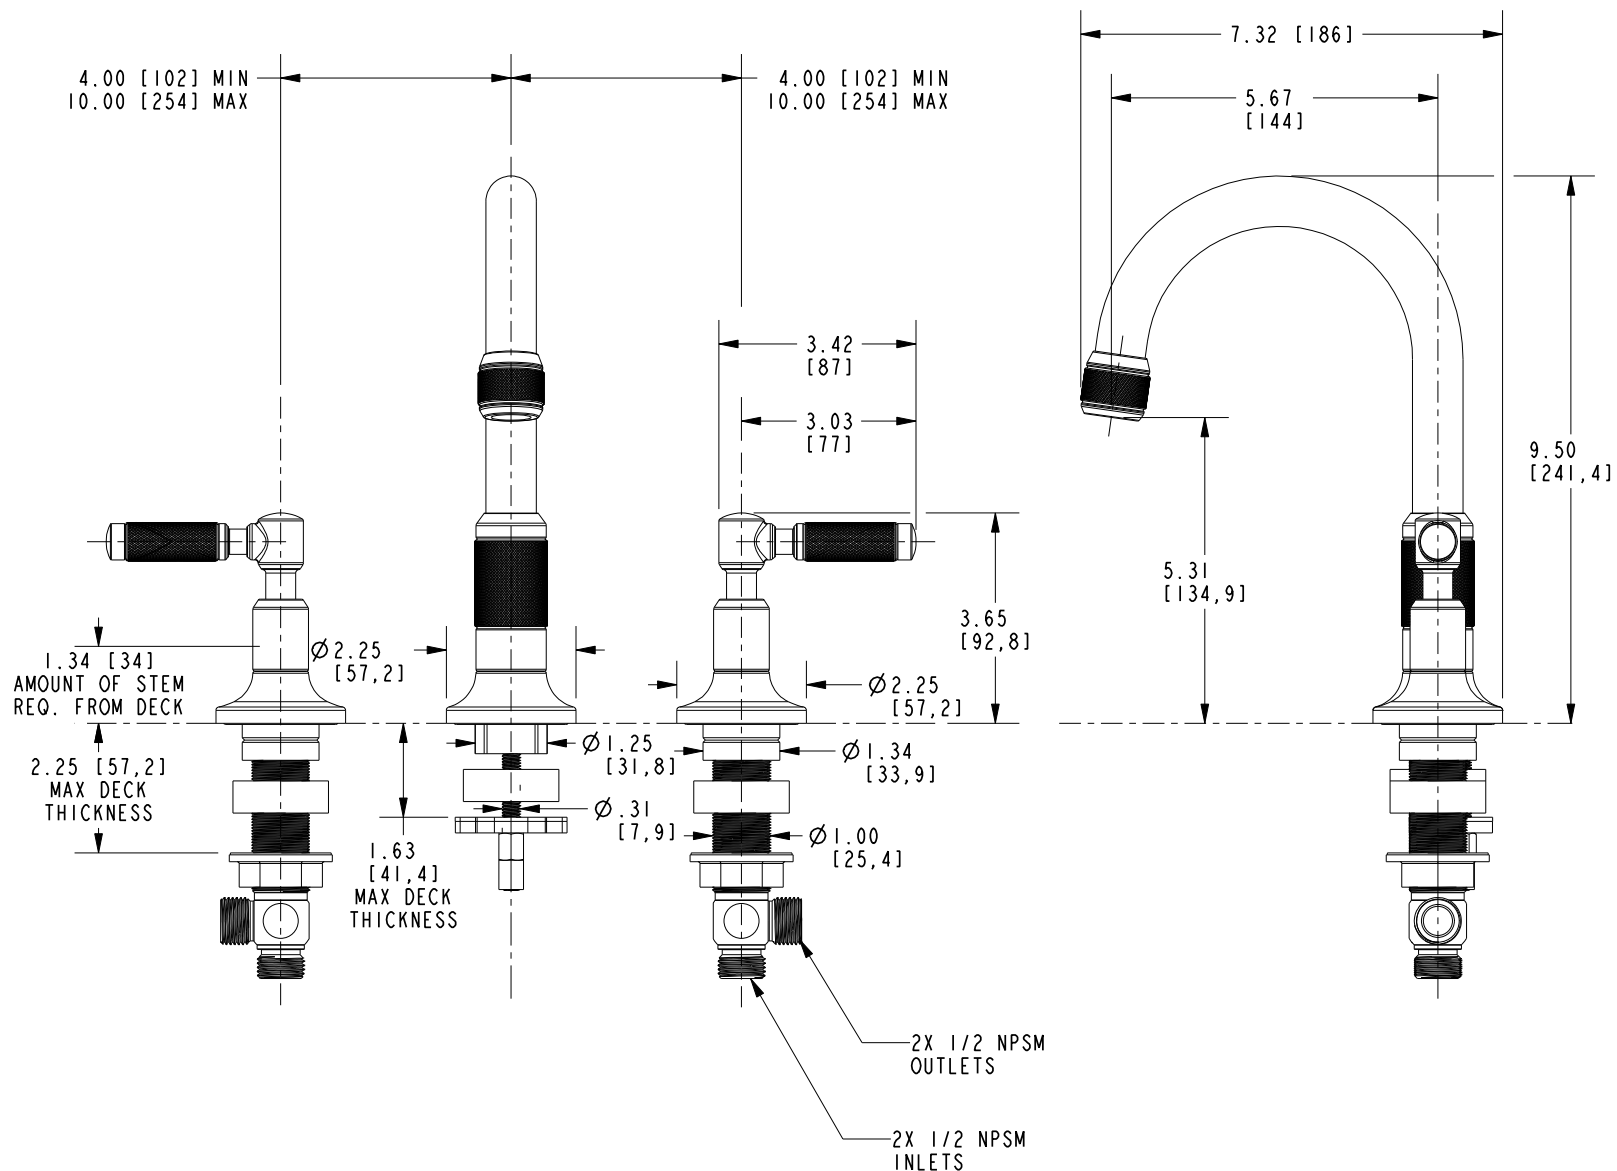

WIDESPREAD FAUCET

3250C

Page 2 of 2
EN- 4793
REV B

NEWPORT BRASS
Flawless Beauty. From Faucet to Finish.

t: 949.417.5207 | www.newportbrass.com
©2024 Brasstech, Inc.