

Features

Solid brass construction
Brass valve bodies
Quarter-turn washerless ceramic disc valve cartridges
Spout assembly with integral supply hoses
Push Pop-Up drain with tailpiece
5.20" (13.2 cm) spout height at outlet
5.63" (14.3 cm) spout reach (c-c)
For 8" (20.3 cm) centers -Maximum 20" (50.8 cm)
ADA Compliant
1.2 GPM (4.5 LPM) Max

WIDESPREAD FAUCET


3270C



Codes / Standards Compliance

Meets or exceeds the following at date of manufacture:


ASME A112.18.1/CSA B125.1
IAMPO/cUPC
NSF/ANSI/CAN 61, SECTION 9
NSF/ANSI 372
IPC
ADA & ICC/ANSI A117.1
Energy Policy Act of 1992
EPA WaterSense
California Energy Commission
All applicable US Federal and State material regulations

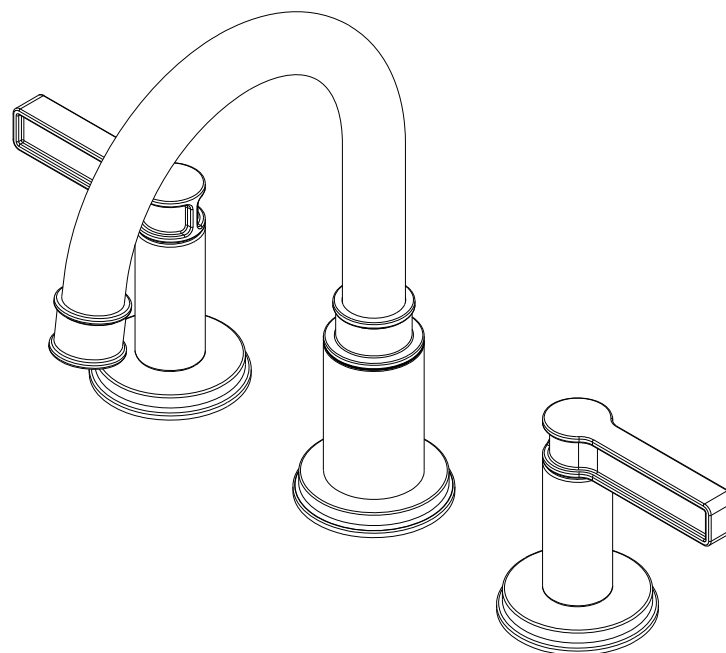

3270C

PRODUCT DIMENSIONS (Units are in inches)

Product Dimensions are provided for reference only. For specific product installation guidelines, please reference the Installation Instructions of the product being installed.

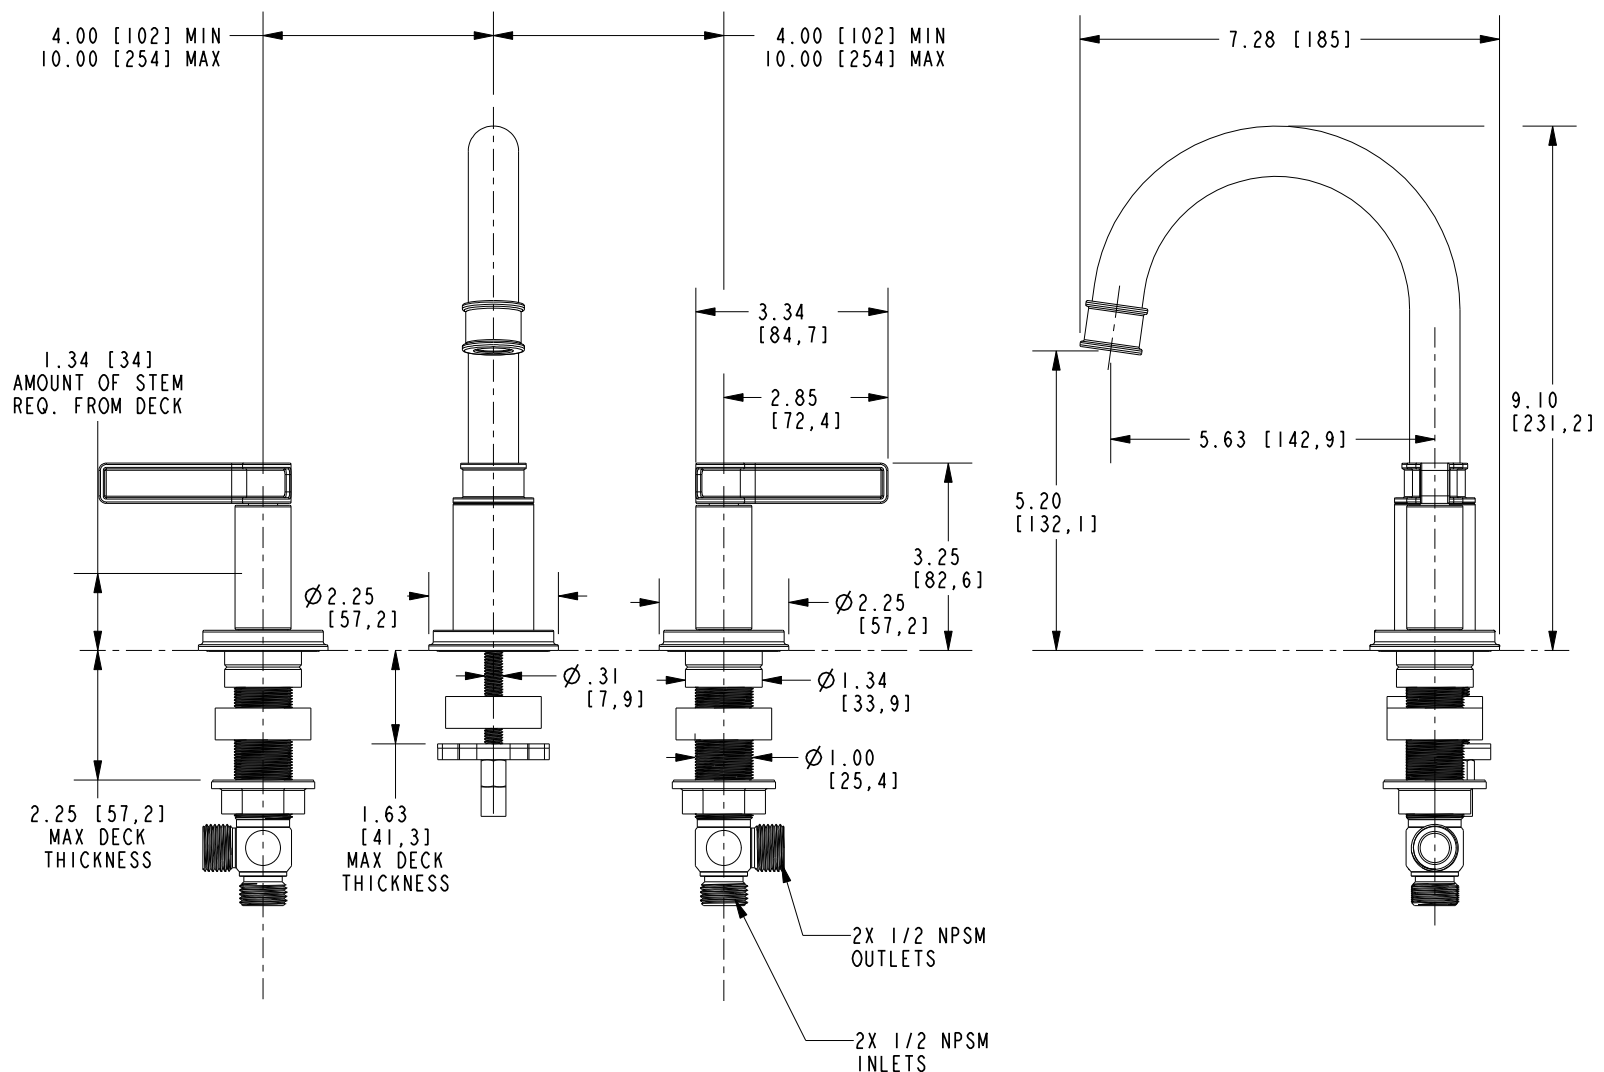

WIDESPREAD FAUCET

3270C

Page 2 of 2

EN- 4793

REV B

NEWPORT BRASS
Flawless Beauty. From Faucet to Finish.

t: 949.417.5207 | www.newportbrass.com
©2024 Brasstech, Inc.