

Features

Solid brass construction
Brass valve bodies
Quarter-turn washerless ceramic disc valve cartridges
Spout assembly with integral supply hoses
Push Pop-Up drain with tailpiece
5.20" (13.2 cm) spout height at outlet
5.63" (14.3 cm) spout reach (c-c)
For 8" (20.3 cm) centers -Maximum 20" (50.8 cm)
ADA Compliant
1.2 GPM (4.5 LPM) Max

WIDESPREAD FAUCET


3280C



Codes / Standards Compliance

Meets or exceeds the following at date of manufacture:

ASME A112.18.1/CSA B125.1
IAPMO/cUPC
NSF/ANSI/CAN 61, SECTION 9
NSF/ANSI 372
IPC
ADA & ICC/ANSI A117.1
Energy Policy Act of 1992
EPA WaterSense
California Energy Commission
All applicable US Federal and State material regulations

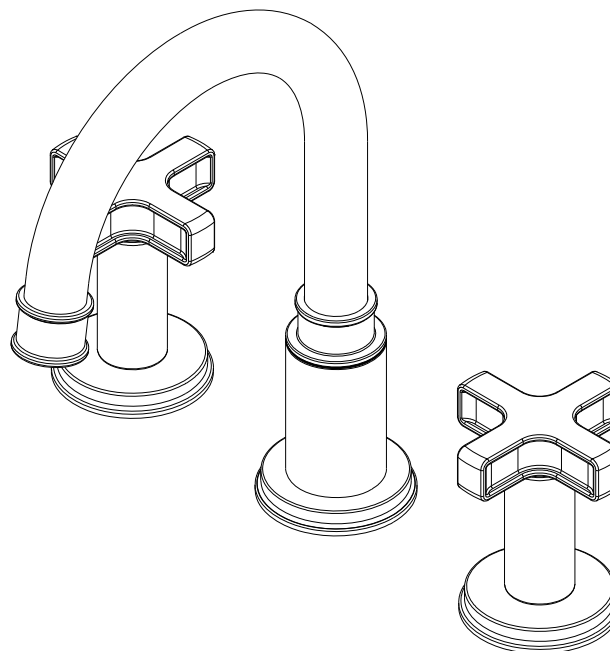

PRODUCT DIMENSIONS *(Units are in inches)*

Technical drawing showing three types of manhole covers (a, b, and c) with dimensions in inches and millimeters.

Common Dimensions:

- Top width: 4.00 [102] MIN to 10.00 [254] MAX
- Top width: 4.00 [102] MIN to 10.00 [254] MAX
- Top width: 2.80 [71,1]
- Top width: 3.25 [82,6]
- Top width: $\phi 2.25$ [57,2]
- Top width: $\phi 2.25$ [57,2]
- Top width: $\phi 1.34$ [33,9]
- Top width: $\phi 1.00$ [25,4]
- Top width: 1.63 [41,3] MAX DECK THICKNESS
- Top width: 1.34 [34] MOUNT OF STEM Q. FROM DECK
- Top width: 2.25 [57,2] MAX DECK THICKNESS
- Top width: $\phi .31$ [7,9]
- Top width: 2X 1/2 NPSM OUTLETS
- Top width: 2X 1/2 NPSM INLETS

Specific Dimensions:

- (a) Standard cover: 1.34 [34] MOUNT OF STEM Q. FROM DECK, 2.25 [57,2] MAX DECK THICKNESS, 1.63 [41,3] MAX DECK THICKNESS.
- (b) Cover with central riser: $\phi 2.25$ [57,2], $\phi .31$ [7,9].
- (c) Cover with dual outlets and inlets: 2.80 [71,1], 3.25 [82,6], $\phi 2.25$ [57,2], $\phi 1.34$ [33,9], $\phi 1.00$ [25,4], 2X 1/2 NPSM OUTLETS, 2X 1/2 NPSM INLETS.

