
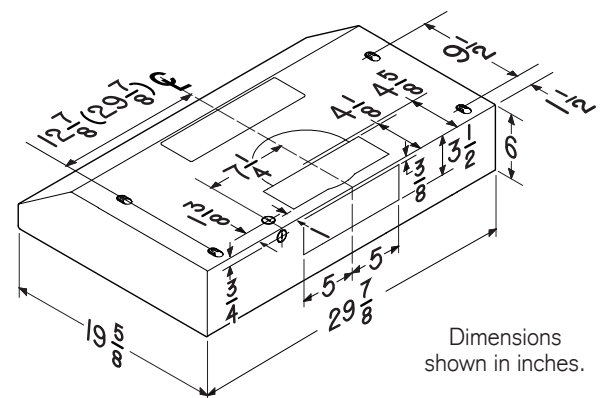


The clean, contemporary shape of Glacier complements any kitchen design. Halogen lighting and superior smoke and odor removal are a mere introduction to everything this hood has to offer.

SIZE	WHITE	STAINLESS	GREASE FILTERS (replacement)	NON-DUCTED FILTER
30 in.	BCSM130WH	BCSM130SS	HPFAMM30 (Type C2)	HPF30 (Type Xc)

PERFORMANCE								
Duct Orientation	Size	Damper	Sones			CFM		
			Normal	Medium	High	Normal	Medium	High
Vertical - Rectangular	3¼ in. x 10 in.	Included	1.2	3.0	5.5	150	200	280
Horizontal - Rectangular	3¼ in. x 10 in.	Included	1.2	3.0	5.5	110	160	250
Round - Vertical	7 in.	Sold Separately	1.5	3.0	5.5	160	210	300

FEATURES	
Control type	3-speed Pushbutton
Delay off	no
Filter Clean Reminder	no
Heat Sentry™	no
ADA Capable	yes
Lighting	2-level 50 W Halogen (bulbs included)
Grease Filters	Micro Mesh (Qty. 2)
Installation Hardware	EZ1 bracket
ENERGY STAR®	no
Recirculation	Non-ducted filters sold separately
AC INPUT	
120 V, 60 Hz - 1.4 AMPS	
OPTIONAL ACCESSORIES	
7-in. Round Damper	BP87Q
7-in. Round Adapter Plate	SR680508
Make-up Air Dampers	MD6TU, MD8TU and MD10TU
MOUNTING HEIGHT	
18 in. to 24 in. from cooktop to bottom of hood	
LIMITED WARRANTY	
1-year	
FOR INDOOR USE ONLY	

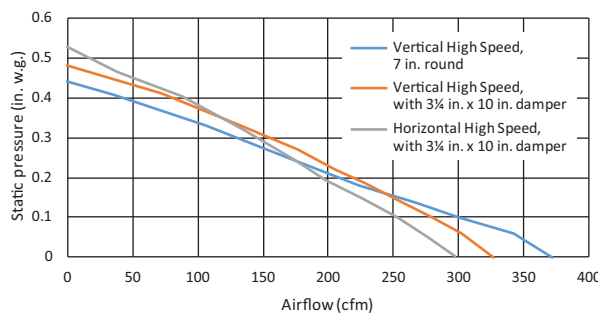

Dimensions shown in inches.



HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at 0.1 in. static pressure, based on tests conducted in AMCA's state-of-the-art test laboratory. Sones are a measure of humanly-perceived loudness, based on laboratory measurements.

99045742C

La forme simple et contemporaine de Glacier convient à tous les styles de cuisine. L'éclairage halogène impressionnant et l'élimination supérieure de la vapeur et des odeurs de cuisson ne sont qu'un avant-goût de tout ce que cette hotte a à offrir.

LARGEUR	BLANC	INOX	FILTRES À GRAISSES (remplacement)	FILTRES DE RECIRCULATION
30 po	BCSM130WH	BCSM130SS	HPFAMM30 (Type C2)	HPF30 (Type Xc)

RENDEMENT									
Orientation du conduit	Largeur	Volet	Sones			pi³/min			
			Normal	Moyen	Haute	Normal	Moyen	Haute	
Rectangulaire vertical	3¼ po x 10 po	inclus	1,2	3,0	5,5	150	200	280	
Rectangulaire horizontal	3¼ po x 10 po	inclus	1,2	3,0	5,5	110	160	250	
Rond vertical	7 po	vendu séparément	1,5	3,0	5,5	160	210	300	

CARACTÉRISTIQUES	
Type de commande	Boutons-poussoirs à 3 vitesses
Arrêt différé	non
Rappel d'entretien des filtres	non
Détecteur Heat Sentry <sup>MC</sup>	non
Capacité ADA	oui
Éclairage	Halogène 50 W à 2 intensités (ampoules incluses)
Filtres à graisses	À maillage fin (qté 2)
Matériel pour l'installation	Supports EZ1
ENERGY STAR®	non
Recirculation	Filtres de recirculation vendus séparément


ALIMENTATION CA	
120 V, 60 Hz - 1,4 A	

ACCESSOIRES OPTIONNELS	
Volet rond de 7 po	BP87Q
Plaque pour conduit rond 7 po	SR680508
Dispositifs d'apport d'air	MD6TU, MD8TU et MD10TU

HAUTEUR DE MONTAGE	
De 18 po à 24 po au-dessus de la surface de cuisson	

GARANTIE LIMITÉE	
1 an	

**POUR UTILISATION À L'INTÉRIEUR SEULEMENT**

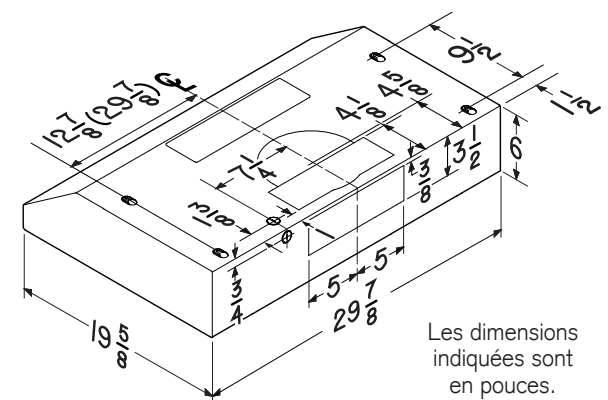

Les dimensions indiquées sont en pouces.

