


# MODEL 506 & 507 CHAIN OPERATED FANS



Easy-to-install direct discharge fan - no wall switch to wire.

### FEATURES

#### GRILLE:

- Contemporary styled grille complements modern decor

#### MOTOR:

- Permanently lubricated, thermally protected, plug-in motor
- Motor assembly offers fast, easy "twist-lock" installation

#### HOUSING:

- Pull chain opens door, turns on fan - no wall switch to wire
- Galvanized steel housing
- Housing adjusts to fit walls from 4½" to 9½" thick

Can be used to ventilate excess heat and humidity from single family, residential garages.

### SPECIFICATIONS

MODEL	VOLTS	AMPS	SONES	CFM
506	120	1.7	7.5	430
507	120	1.5	7.0	250



HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at 0.1 in. static pressure, based on tests conducted in AMCA's state-of-the-art test laboratory. Sones are a measure of humanly-perceived loudness, based on laboratory measurements.

### TYPICAL SPECIFICATION


Ventilator shall be Broan Model 506 (Model 507).

Ventilator shall have galvanized steel housing.

Motor assembly shall be removable and permanently lubricated.

Air delivery shall be no less than 430 CFM and sound level no greater than 7.5 Sones (Model 506) (250 CFM and 7.0 Sones – Model 507). All air and sound ratings shall be certified by HVI. Units shall be U.L. Listed.

Can be used to ventilate excess heat and humidity from single family, residential garages.

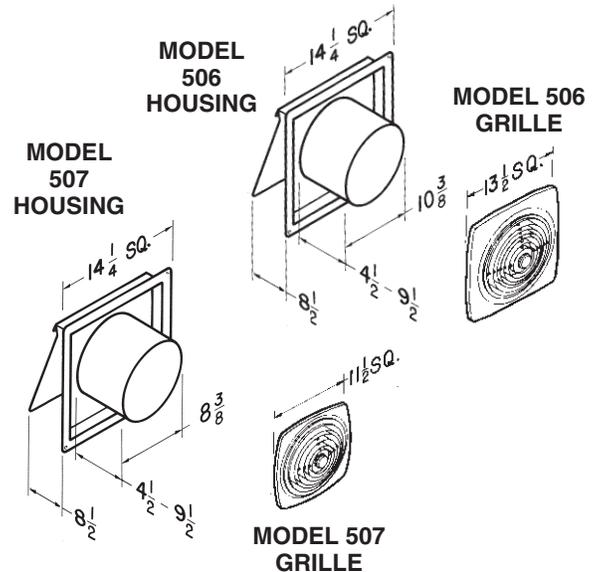

Broan Hartford, Wisconsin www.broan-nutone.com 800-558-1711

REFERENCE	QTY.	REMARKS	Project	
			Location	
			Architect	
			Engineer	
			Contractor	
			Submitted by	Date