

DESCRIPTION


- UL Listed for use in commercial applications
- Watertight electrical terminal box
- Totally enclosed motor
- High-efficiency motorized impeller
- Automatic reset thermal overload protection

DESIGN FEATURES

Air delivery: 140 CFM at 0.2" S.P.
Sound Level: N/A - unit is remotely mounted
Amps: 0.7
Housing: UV-resistant, durable polycarbonate plastic
Motor: External rotor, ball bearing, 115 volts AC, 60 Hz
Blower Wheel: Backward inclined centrifugal
Duct Size: 4" (102 mm) or 5" (127 mm) diameter


INSTALLATION

- Not for use in cooking areas
- Approved for mounting in wet locations (outdoors)
- Suitable for use over a tub or shower when connected to a GFCI-protected branch circuit
- Suitable for use with solid-state speed controls

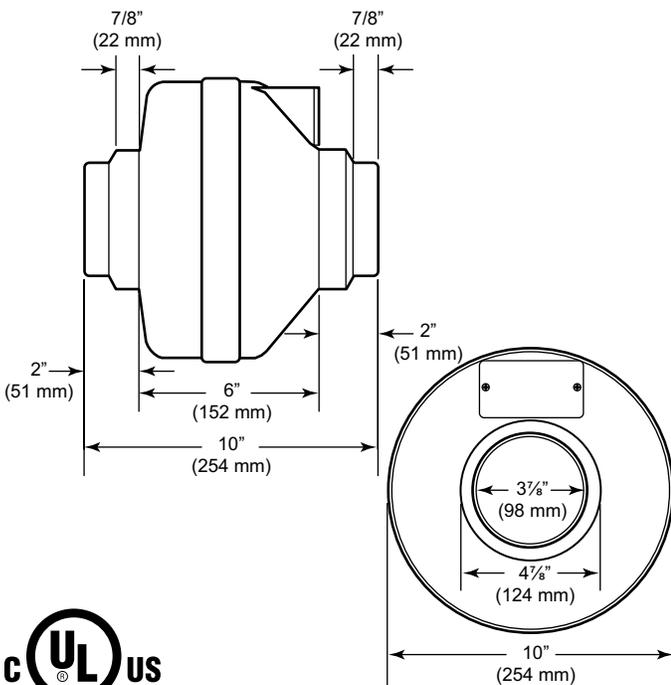


In-Line Radon Fan

MODEL ILRF

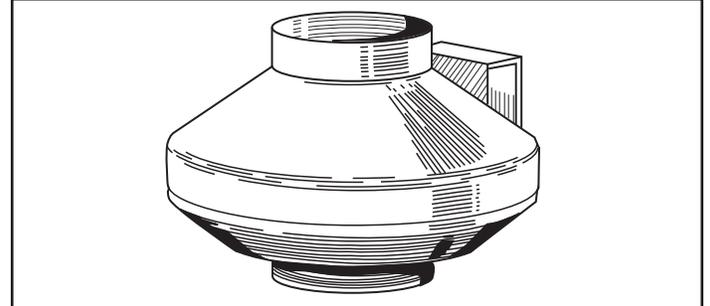

TYPICAL SPECIFICATIONS

- Unit shall be NuTone model ILRF
- Housing shall be constructed from UV resistant durable plastic
- Unit shall include a watertight electrical terminal box and factory sealing to prevent water damage to interior
- Unit shall be approved for use in wet locations
- Unit shall include a motorized impeller for high efficiency performance, with automatic reset thermal overload protection
- Air delivery shall no be less than 140 CFM (66 L/s). Air rating shall be conducted at an HVI recognized testing facility. Unit shall be cULus Listed.

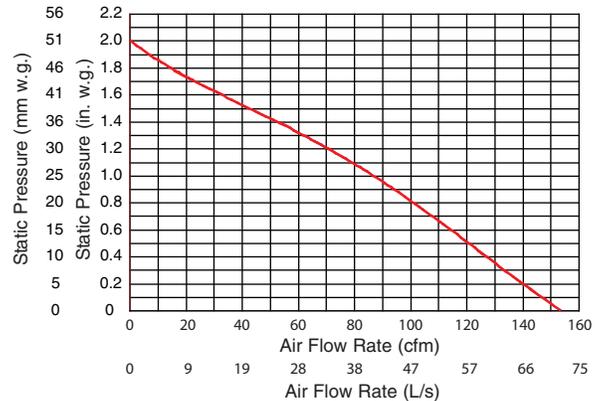

HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at 0.2 in. static pressure, based on tests conducted in a state-of-the-art test laboratory.

Broan-NuTone LLC Hartford, Wisconsin www.nutone.com 1-888-336-3948
 Broan-NuTone Canada Inc. Mississauga, Ontario www.nutone.ca 1-877-896-1119

REFERENCE	QTY.	REMARKS	Project
			Location
			Architect
			Engineer
			Contractor
			Submitted by
			Date