

# Outdoor Shower Company, LLC

Dallas, Georgia

www.outdoorshowerco.com — 1-866-SHOWER1

Manufactures of Quality Outdoor Stainless Steel Showers



WMHC-445-DLX - Wall Mount Hot & Cold Shower - Hand Spray & Hose - 6" Shower Head

## WMHC-445-DLX PARTS LIST:

- |                 |  |
|-----------------|--|
| (1) SHDA-8      | 8" Chrome Plated Brass Shower Head (2.5 GPM) - Swivel Ball Joint   |
| (2) SR-35-90    | 35" Riser - 90° bend - 1/2" 304 sch40 Stainless Steel  |
| (3) WB-3        | 3" Wall Bracket with (2) Stainless Steel Screws  |
| (4) LHSV-369    | Lever Handle Diverter Valve  |
| (5) DIV-82012   | Stainless Steel Diverter with Hand Spray Bracket and Connection - Swivel Adapter for Valve Connection    |
| (6) HC-445      | Chrome Plated Brass Valve - ADA Compliant Lever Handles - 4"-8 3/8" Center Spread - 1/2" NPT Supply Arms |
| (7) HSH-0101-60 | Chrome Plated Brass Hand Spray (1.2 GPM)- 60" Stainless Steel Flexible Hose                              |



Accessories may vary due to availability and slight modifications by the manufacturer.

## **WMHC-445-DLX Installation Guidelines**

Recommended Shower Head Height: 78"

Water Supply Line threads should be exposed through wall and roughed in at 40"- 41" from flooring surface with 4 to 8 inch spread.

1. With about 1" of water line threads exposed through mounting surface, place trim flanges over Hot & Cold water supply pipes.
2. Attach Supply Arms to Hot & Cold water supply pipes.
3. **NOTE:** Flush supply lines before installing valve.
4. Adjust supply arms to desired centers making sure washers are in place.
5. Tighten arms to body with 12" crescent wrench making sure fitting is level.
6. Slide Wall Bracket onto Riser. Tighten set screw when placed at desired position.
7. Attach Riser to Lever Handle Straight Valve/Diverter piece using Teflon Tape.
8. Attach Diverter to faucet making sure washer is in place. Tighten.
9. Secure unit to wall with stainless steel screws by marking position on the wall using wall bracket as a guide.
10. Attach Shower Head to Riser. Teflon Tape is not needed.
11. Attach Hand Spray Hose to Diverter piece.


NOTE: A check valve may be required inside the wall for the hot & cold water supply lines. This part is not provided by Outdoor Shower Co., but is available through your plumbing contractor.

Outdoor Shower Company, LLC

Dallas, Georgia

www.outdoorshowerco.com — 1-866-SHOWER1

Manufactures of Quality Outdoor Stainless Steel Showers

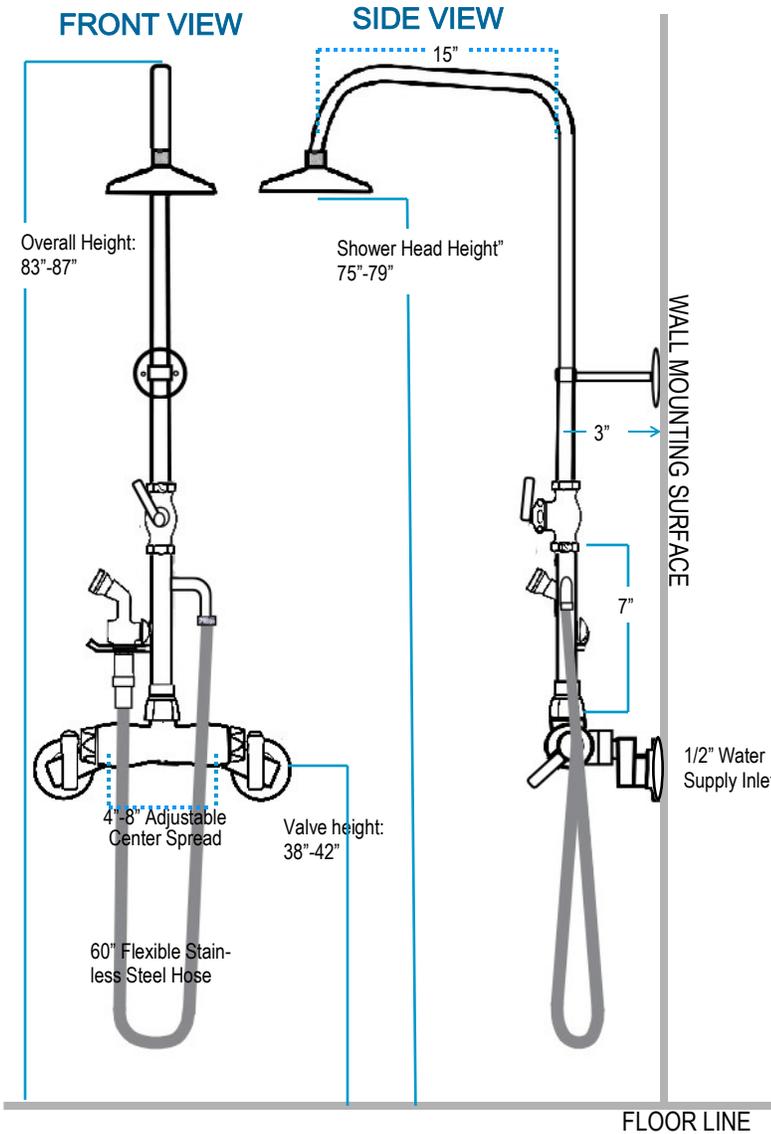

**NOTE:** Flush supply lines before installing valve to remove chips and dirt which can become lodged in the seat washer and cause the faucet to malfunction.

**WINTERIZING:** It is recommended that a shut-off valve be installed in the water line going to the pool shower connection where freezing temperatures can occur. Accessories can be removed and other parts partially disassembled for complete protection against freeze damage.

**FREEZE DAMAGE IS NOT COVERED BY THE WARRANTY.**



ADA COMPLIANT

**TECHNICAL DATA:**

- 2.5 GPM SHOWER HEAD
- 1/2" STAINLESS STEEL RISER
- CHROME PLATED BRASS HOT & COLD VALVE
- CHROME PLATED BRASS DIVERTER VALVE
- ADA COMPLIANT LEVER HANDLES
- 4"-8" CENTER SPREAD
- 1/2" NPT INLETS
- 1.2 GPM CHROME PLATED BRASS HAND SPRAY
- 60" STAINLESS STEEL FLEXIBLE HOSE

# Outdoor Shower Company, LLC

Dallas, Georgia

www.outdoorshowerco.com — 1-866-SHOWER1

Manufactures of Quality Outdoor Stainless Steel Showers



## WMHC-445-DLX OPTIONAL ACCESSORIES & REPLACEMENT PARTS

### WMHC-445-DLX-FS (shown) HAND SPRAY & FOOT SHOWER

- STAINLESS STEEL FOOT SHOWER
- ADA COMPLIANT LEVER HANDLE VALVE
- 1" SHOWER HEAD (2.5 gpm)
- CHROME PLATED BRASS HAND SPRAY (1.2gpm)
- 60" STAINLESS STEEL HOSE

**PLEASE NOTE:** The FOOT SHOWER comes standard with a Lever Handle; however, a Cross Handle or ADA Metered Push Handle are available upon request.




### WMHC-445-DLX-HB HAND SPRAY & HOSE BIBB

- STAINLESS STEEL HOSE BIBB
- CROSS HANDLE VALVE (LEVER HANDLE SHOWN)
- CHROME PLATED BRASS VACUUM BREAKER 3/4" MHT
- CHROME PLATED BRASS HAND SPRAY (1.2gpm)
- 60" STAINLESS STEEL HOSE




**PLEASE NOTE:** The HOSE BIBB comes standard with a Cross Handle. A Lever Handle valve is shown.

### HSH-0101-60 HAND SPRAY & HOSE

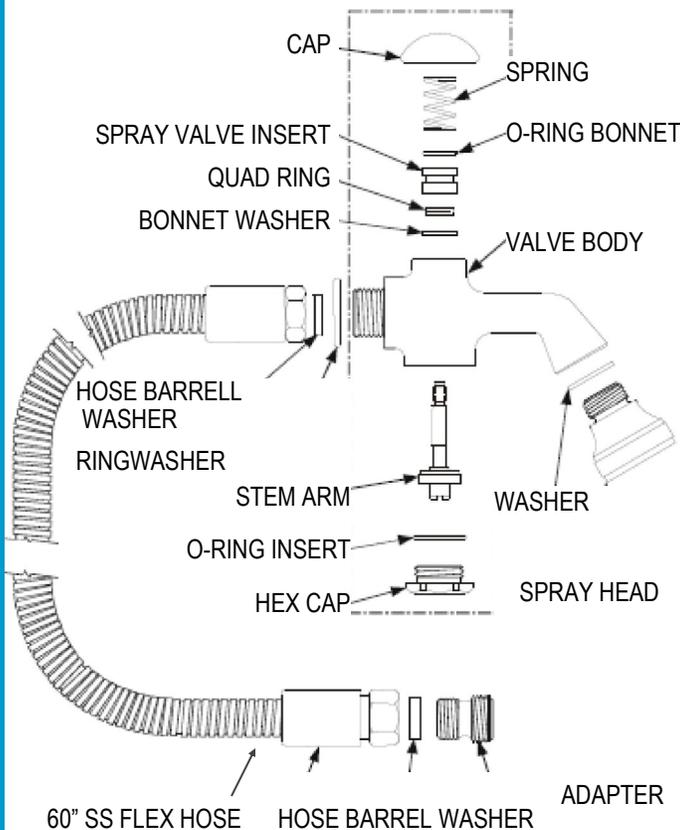

### 445-LESSPT HOT & COLD WALL MOUNT VALVE

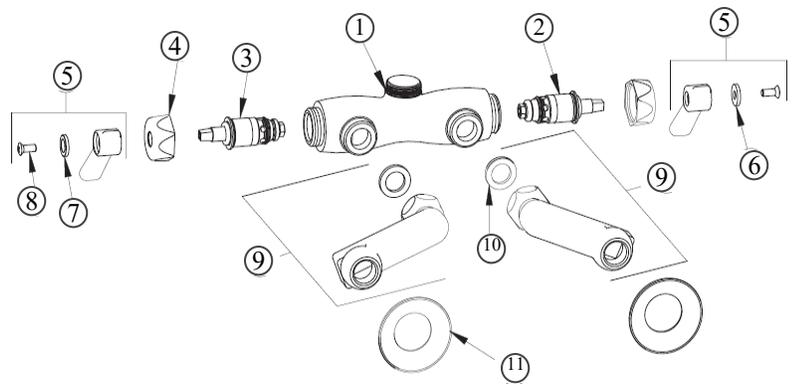

- ① VALVE BODY
- ② LH QUATURN UNIT
- ③ RH QUATURN UNIT
- ④ CAP NUT
- ⑤ LEVER HANDLE ASSEMBLY
- ⑥ INDEX BUTTON (RED)
- ⑦ INDEX BUTTON (BLUE)
- ⑧ SCREW

- ⑨ ARM ASSEMBLY w/WASHER
- ⑩ WASHER
- ⑪ FLANGE