SPECIFICATION SHEET



i3 SINGLE HANDLE LAVATORY FAUCET



| odel #: | |
|---------|------|
| | |

Specific Features:

Project Name: Submitted For:

Date:

Lever Handle

4-3/8" Reach, 2-5/8" From Deck to Aerator

Ceramic Disc Cartridge

1-Hole Installation

Brass Pop-Up Drain Assembly

Easy-Install 18" Flex Supply lines with 3/8" Connections

With 1.2 GPM Flow Rate

#L-6012 SHOWN ADA




| | Model # | Features | Finish | |
|--|-----------|--------------------|--------|--|
| | L-6012 | | СР | |
| | L-6012-BN | | PVD BN | |
| | L-6012B | Builder Tract Pack | СР | |


* Aerator limited to 1.2 GPM Flow Rate

Olympia products are engineered and manufactured to meet the following standards and codes:

ASME A112.18.1 ANSI A117.1

ANSI / NSF 61, SECTION 9
CONTAINS NO MORE THAN 0.25% WEIGHTED AVERAGE LEAD CONTENT



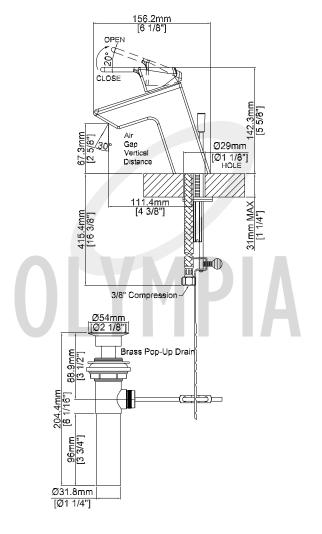

^{*} E0.5 - 0.5 GPM Flow Rate Aerator Available upon request