



Olympia Faucets
VALUE FOR BUILDERS

SPECIFICATION SHEET


V-2500B
Valve Series



Single Handle Tub/Shower Pressure Balancing Valve With Built-in 2 Way Diverter

- Combo CXC and IPS Inlet and Outlet
- Pressure Balancing Two Way Diverter Cartridge
- Brass Inlet Stops With Backflow Preventers
- Stainless Steel Mounting Bracket
- Square Mud Guard With Leveler Allows Right Angle Cuts
- Thin or Thick Wall Mounting



V-2500B Flow Rate (GPM) Vs Pressure (PSI) For Tub Port*

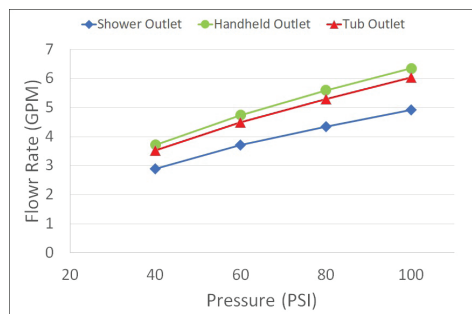


*Note: This information is provided for reference only. Actual Flow Rate may vary depending on installation and inlet pressures.

Olympia products are engineered and manufactured to meet the following standards and codes :
ASSE 1016

Note: Cartridge operational at pressures 20 PSI to 100 PSI.

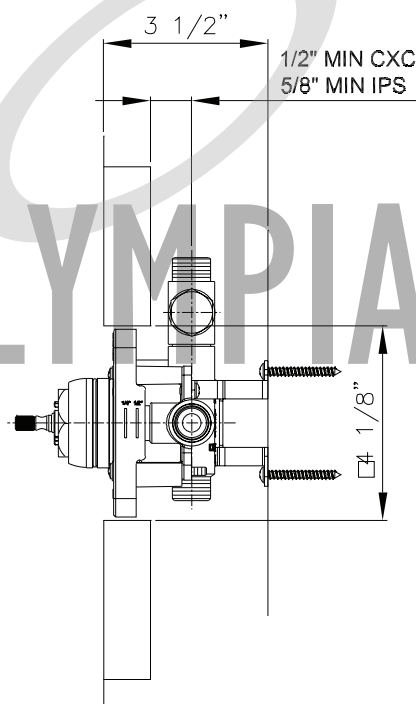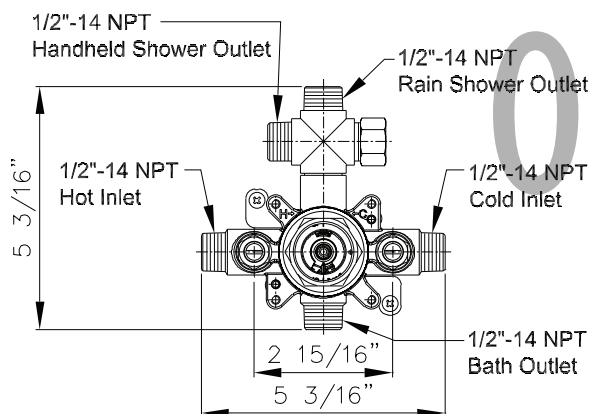

THICK WALL

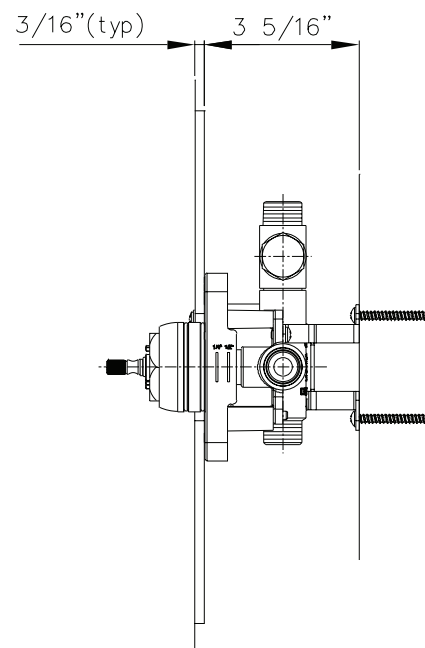

THIN WALL