


# PEERLESS®

P299618LF-W  
P299618LF-ECO-W

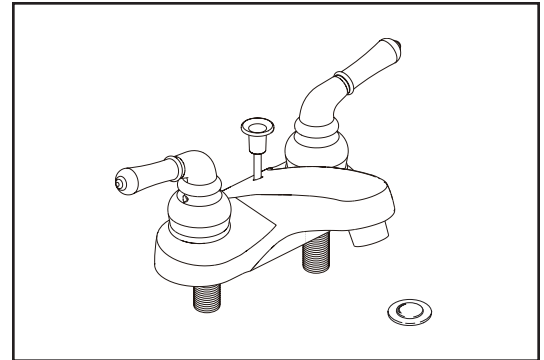

## BATHROOM FAUCET

### ■ Two Handle Centerset Deck Mount


#### STANDARD SPECIFICATIONS:


- Max flow rate: 1.5 gpm @ 60 PSI, 5.7 L/min @ 414 kPa.
- Max flow rate (ECO models only): 1.2 gpm @ 60 psi, 4.5 L/min @ 414 kPa.
- Three hole mount.
- Hot and cold stems are interchangeable.
- 1/4 turn handle stops.
- Control mechanism is a rotating cylinder type with stainless steel plate and 90° rotation, with replaceable non-metallic seats.
- Models have drain with pop-up type fitting with plated flange and stopper.
- RP76691 thick deck mounting kit adds 1 1/4" (32 mm) to maximum deck thickness.

#### WARRANTY:

- Parts and Finish - Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date of purchase.

#### COMPLIES WITH:

- ASME A1 12.18.1 / CSA B125.1
- ASME A1 12.18.2 / CSA B125.2
-  Indicates compliance to ICC/ANSI A117.1 - Valve control only
- EPA WaterSense®

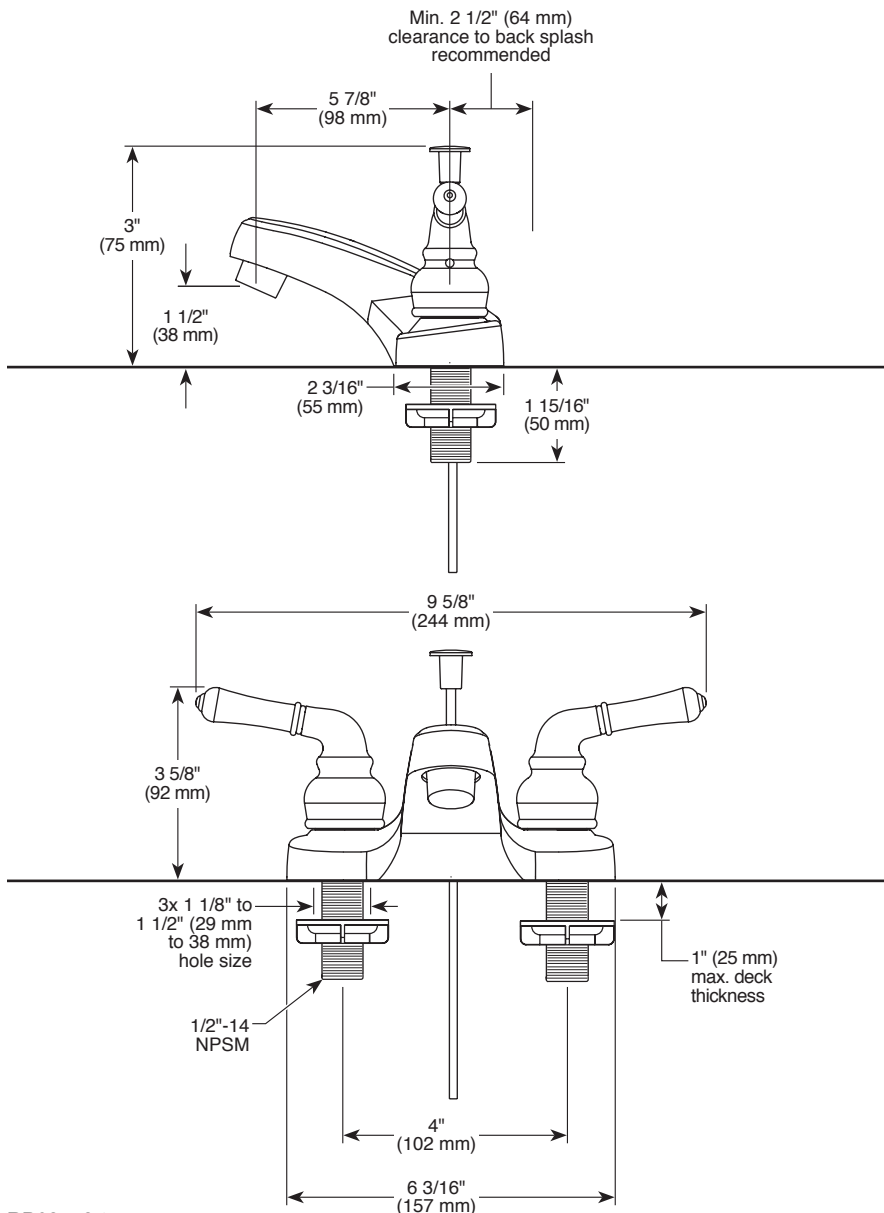

RP62472▲  
Plastic Pop-Up

