

K8200H





■ PRODUCT FEATURES

- .
- .
- .
- .
- .

■ TECHNICAL DETAILS

ADA Compliance: Yes  
Deck Thickness Maximum: 2"  
Deck Thickness Minimum: 1/8"  
Fitting Hole Diameter: 1 1/8 - 1 3/8"  
Number of Holes: 1  
Number of Handles: 2  
Hand Turn Angle: 90°  
Spout Reach: 9 1/2"  
Spout Height: 14 5/8"  
Inlet Connection Type: 3/8" Compression  
Installation Type: Deck Mounted  
Primary Material: Brass  
Valve Material: Ceramic  
Flow Restriction: 1.8 gpm  
Water Pressure Maximum: 85 PSI  
Water Pressure Minimum: 20 PSI

■ PRODUCT DIMENSIONS

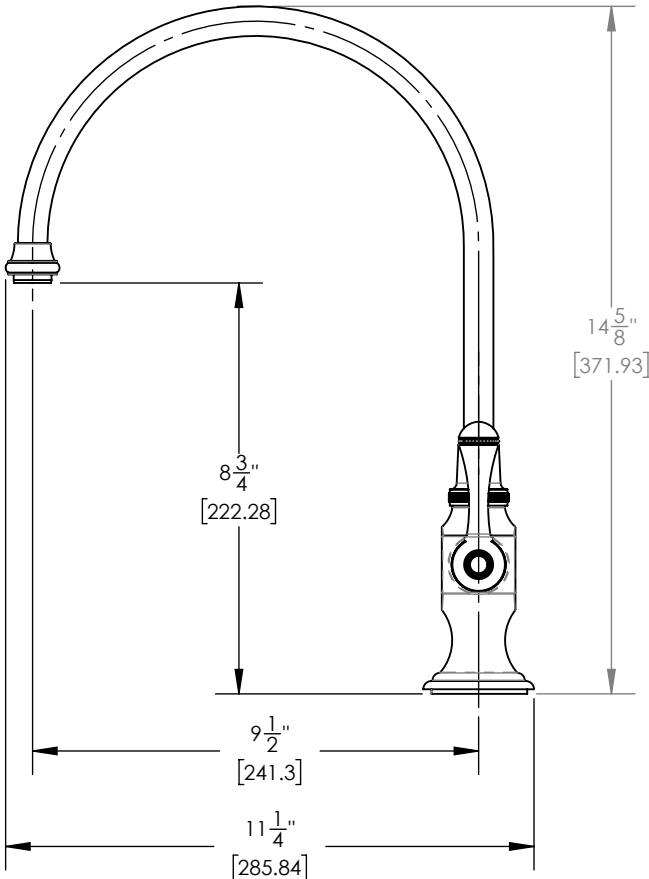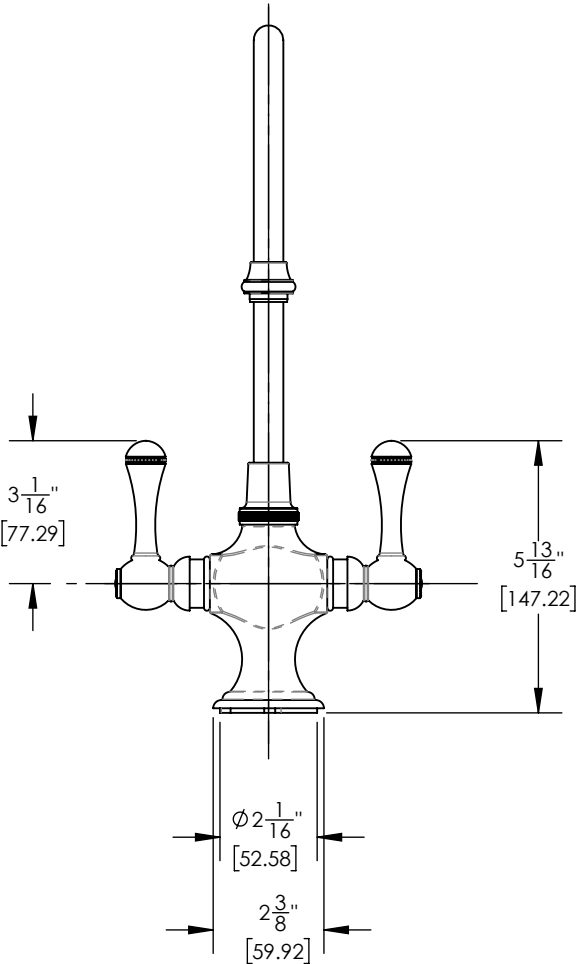

[www.phylrich.com](http://www.phylrich.com)

1261 Logan Avenue, Costa Mesa, California 92626.  
Phone: 714.361.4800 Fax: 714.617.3120



**CODES & STANDARDS**

ASME A112.181/ CSA B1251, ASME 112.18.2/ CSA B125.2, ANSI NSF, CEC

**WARRANTY**

Mechanical Warranty: 10 Years from date of purchase.  
Finish Warranty: See catalog for further information.