


- LG46-MOBC Finish(C)
- LG46-MOBD Finish(D)
- LG46-MOBK Finish(K)
- LG46-MOBY Finish(Y)

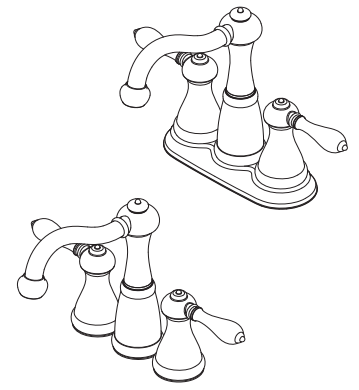

Specifications

- 3-Hole Installation
- Solid Brass Construction

Features

- 1.2 GPM Flow Rate
- Fixed Underbody
- Solid Brass Construction
- Includes Metal Supply Nuts
- Accommodates Up to 2" Deck Thickness
- 3-Hole Installation
- 4" Centerset and Mini Widespread Combination
- Metal Lever Handles
- Mounting Hardware Included
- Install With or Without Deck Plate
- Metal Pop-Up
- High-Arc Decorative Spout
- Pforever Seal Ceramic Disc Valve
- Pforever Warranty®

Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified
- CSA B125 Certified
- ASME A112.18.1
- NSF 61/9 Annex G (Low lead)
- Cal Green Compliant
- CEC Compliant
- EPA WaterSense Certification 1.2 gpm, 4.5L/Min
- ADA Compliant-ANSI A117.1 (Lever handles only)



Dimensions

