


- LG49-AMT1BG Finish(BG) ☐
- LG49-AMT1C Finish(C) ☐
- LG49-AMT1D Finish(D) ☐
- LG49-AMT1K Finish(K) ☐
- LG49-AMT1SDB Finish(SDB) ☐



Specifications

Features

- 1.2 GPM Flow Rate
- Adjustable Install
- Fixed Hubs
- Metal Push & Seal™ Drain
- Mounting Hardware Included
- Handles Not Included:
- For Lever Handles Order HHL-49AMTL*
- For Cross Handles Order HHL-49AMTC*
- For Ridge Handles Order HHL-49AMTR*



- Supply Lines Not Included
- Pforever Seal™ Ceramic Disc Valves
- Limited Lifetime Warranty


Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified to ASME A112.18.1/CSA B125.1
- NSF/ANSI/CAN61:Q ≤ 1
- EPA WaterSense Certified
- CEC Certified/CALGreen compliant
- ADA Compliant - ANSI A117.1 (Lever Handles Only)



Dimensions

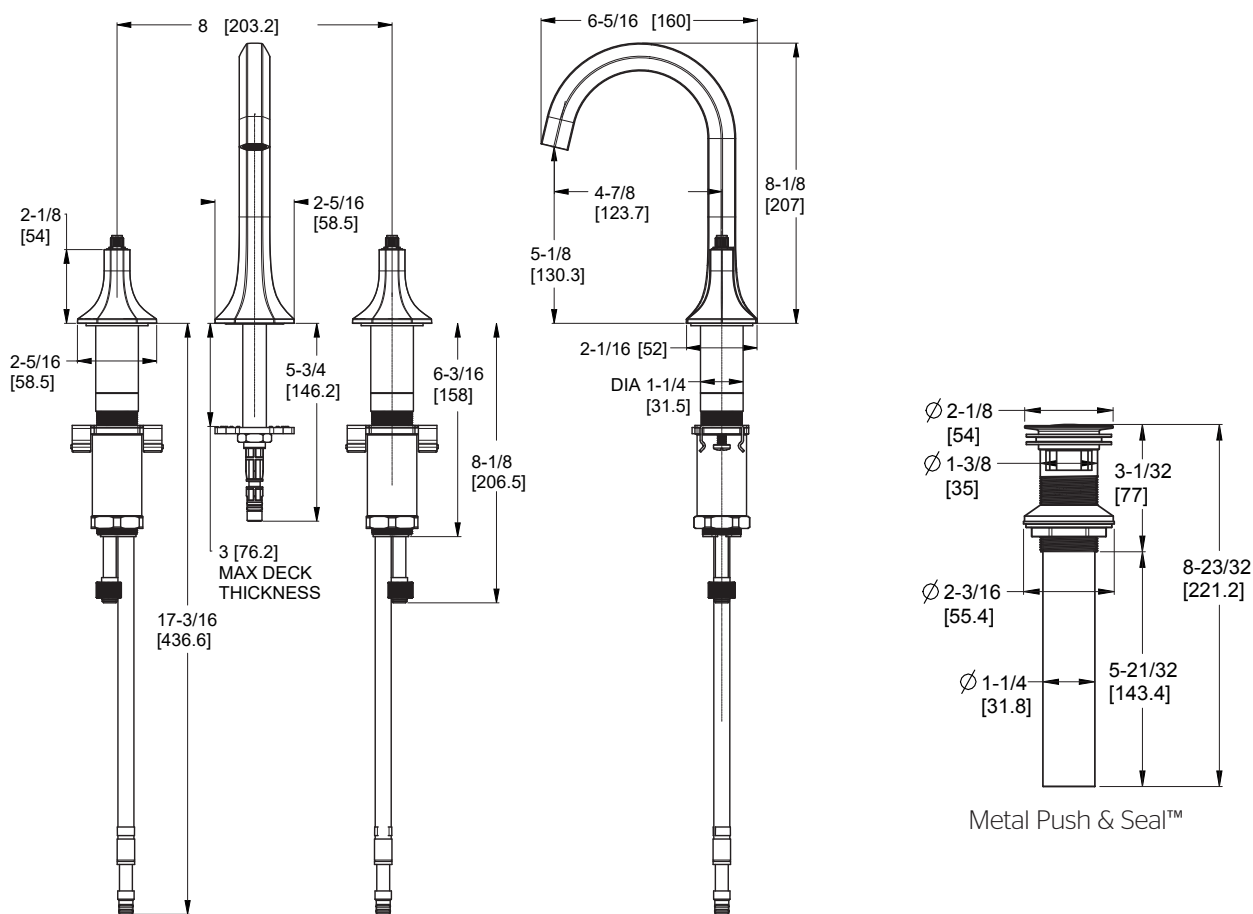

Ø1-1/4 Min to Ø1-1/2 Max. Deck Hole Openings