


- LG49-VRV3B Finish(B) ☐
- LG49-VRV3BG Finish(BG) ☐
- LG49-VRV3C Finish(C) ☐
- LG49-VRV3D Finish(D) ☐

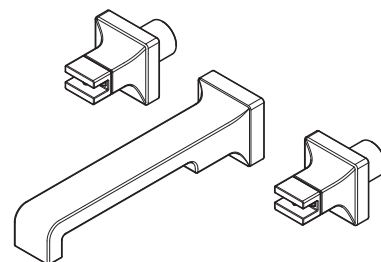

Specifications

Features

- 1.2 GPM Flow Rate
- Trim Only, Valve Not Included. Must Order LOW8-0200 Separately
- Fixed Hubs
- Ribbon Water Flow
- Mounting Hardware Included
- UltraSeal™ Ceramic Disc Valve
- Supply Lines Not Included
- Optional Handles Available:
For L Handles Order HHL-VRVL*
For T Handles Order HHL-VRVT*
For Cross Handles Order HHL-VRVX*
- Limited Lifetime Warranty

- 3-Hole Installation
- Trim Only, Valve Not Included

Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified to ASME A112.18.1/CSA B125.1
- NSF/ANSI/CAN61:Q≤1
- EPA WaterSense Certified
- CEC Certified/CALGreen compliant
- ADA Compliant - ANSI A117.1 (Lever Handles Only)



Dimensions

