Ashfield™

Bar & Prep Faucet



LG72-YP2C Finish*(CC)* ❑
LG72-YP2K Finish*(KK)* ❑
LG72-YP2U Finish*(UU)* ❑
LG72-YP2Y Finish*(YY)* ❑

- 2-Hole Installation
- Pforever Seal
- Temperature Memory Feature Retains Desired Temperature Setting

Specifications

Features

- 1.75 GPM Flow Rate
- Temperature Memory Feature Retains Desired Temperature Setting
- 360º Swivel Spout
- High-Arc Decorative Spout
- Pforever Seal Ceramic Disc Valve
- Pforever Warranty®

Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified
- CSA B125 Certified
- ASME A112.18.1
- NSF 61/9 Annex G (Low lead)
- CEC Compliant
- ADA Compliant-ANSI A117.1 (Lever handles only)

Dimensions

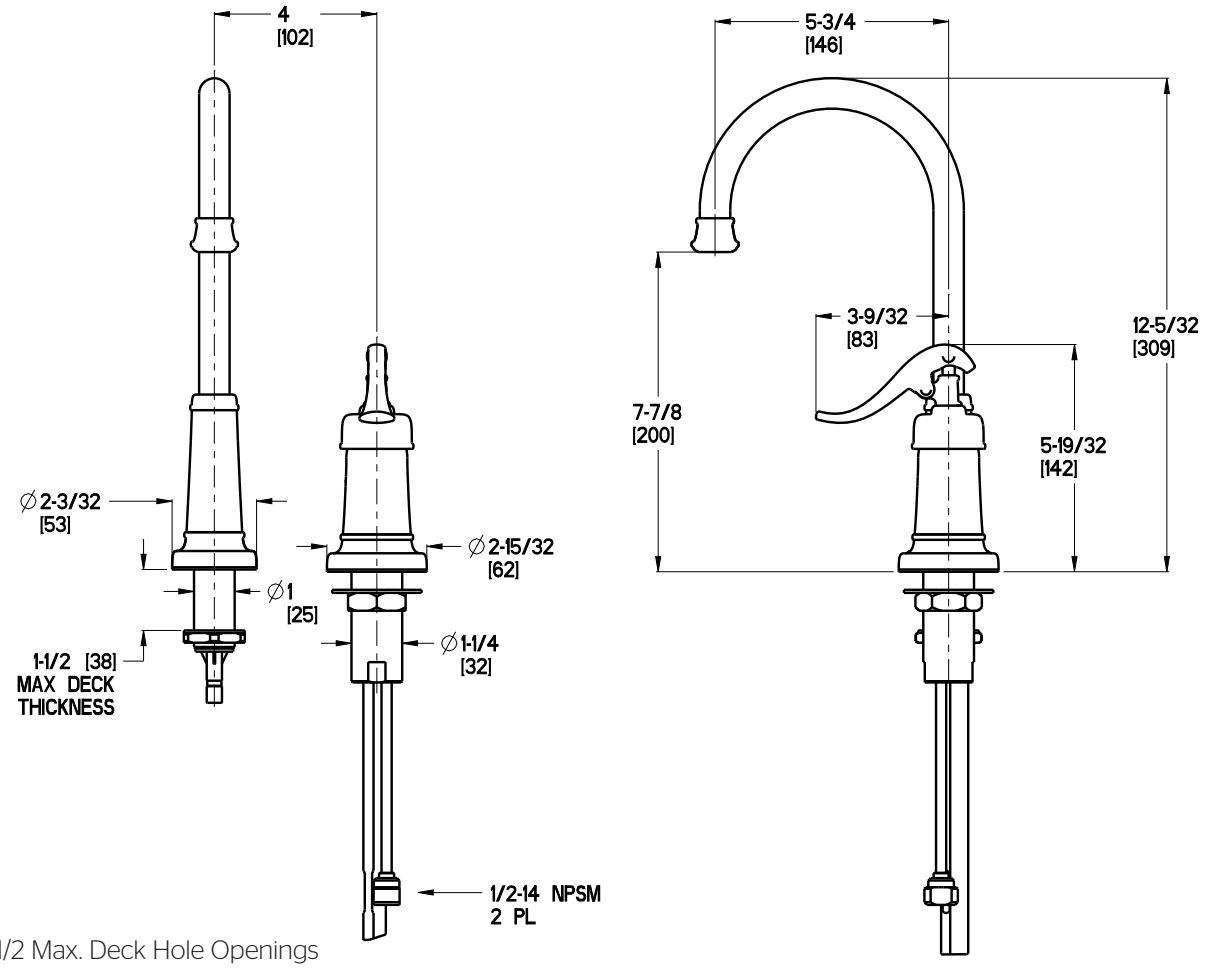

Ø1-3/8 Min to Ø1-1/2 Max. Deck Hole Openings

Copyright © 2020, Pfister Inc.