



Project:	Type:
Prepared By:	Date:

Technical Specifications

Performance

Product Type:

A-Line

Input Wattage:

15W

Lumens (Nominal):

1680lm

Efficacy:

112 lm/W

L70 Lifespan:

15,000-Hour LED lifespan based on IES LM-70 results

Wattage Equivalency:

100W Incandescent

Compliance

UL Listed:

Suitable for damp locations

Enclosed Fixtures:

Suitable for use in enclosed fixtures

LED Characteristics

Color Temperature:

4000K

Color Accuracy (CRI):

80 CRI

Electrical

Power Factor:

0.7

Dimmable:

Yes

Operating Temperature:

-20°C - 45°C (-4°F - 113°F)

Input Voltage:

120V

Technical Specifications (continued)

Electrical

Operating Frequency:

60 Hz

Construction

Bulb Shape:

A19

Base Type:

E26

Optical

Beam Angle:

230°

Other

Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of three (3) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.


Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.


Case and Pallet Dimensions

	QTY	LENGTH (in)	WIDTH (in)	HEIGHT (in)
CASE	12	15.4	5.2	4.9
PALLET	2304	41.34	40.94	45.47

Dimension

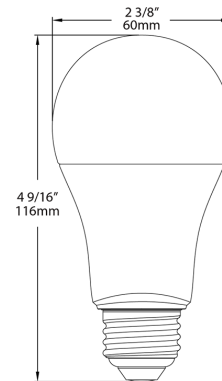

Light Distribution

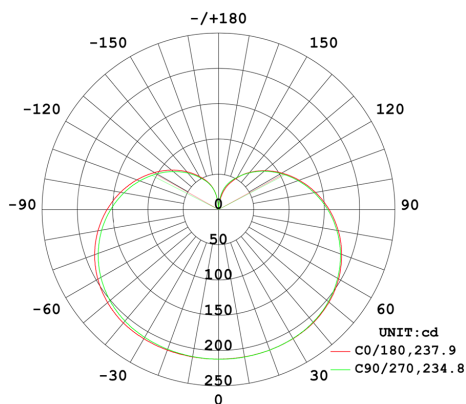

Features

Replacement for High-output Incandescent or lower wattage metal halide and high pressure sodium lamps

Rated for use in enclosed and open fixtures in dry or damp locations

Ideal for post top, bollards, and outdoor corridor lighting

Suitable for use in a base-up or base-down position

Ordering Matrix

Family		Wattage		Base Type		CRI/Color Temp		Dimmable
A19	-	15	-	E26	-	840	-	DIM
		5 = 5W 9 = 9W 10 = 10W 13 = 13W 15 = 15W 16 = 16W 23 = 23W		E26 = E26 Base GU24 = GU24 Base		850 = 80 CRI, 5000K 840 = 80 CRI, 4000K 835 = 80 CRI, 3500K 830 = 80 CRI, 3000K 827 = 80 CRI, 2700K		DIM = Dimmable DIM 120V = Dimmable