



Project:	Type:
Prepared By:	Date:

Technical Specifications

Performance

Product Type:

A-Line

Input Wattage:

15.5W

Wattage Equivalency:

100W Incandescent

Lumens (Nominal):

1600lm

Efficacy:

93 lm/W

L70 Lifespan:

15,000 Hours

Construction

Bulb Shape:

A19

Base Type:

GU24

For Use Outdoors in Open Fixtures:

No

LED Characteristics

Color Temperature:

3000K Warm White

Color Accuracy (CRI):

80 CRI

Electrical

Power Factor:

≥0.7

Operating Temperature:

-20°C - 45°C (-4°F - 113°F)

Dimmable:

Yes, down to 10%

Technical Specifications (continued)

Electrical

Input Voltage:

120V

Operating Frequency:

60 Hz

Optical

Beam Angle:

230°

Other

Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of three (3) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Compliance

UL Listed:

Yes

ENERGY STAR V2.0:

This product is ENERGY STAR® Version 2.0 Certified

Energy Star ID:

2329588


California Energy Commission (CEC) Status:

Not lawful for sale in California


Case and Pallet Dimensions

	QTY	LENGTH (in)	WIDTH (in)	HEIGHT (in)
CASE	12	15.4	5.2	4.9
PALLET	2268	47.2	39.4	45.7

Dimension

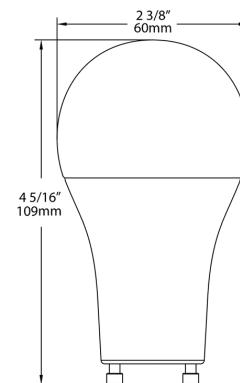

Light Distribution

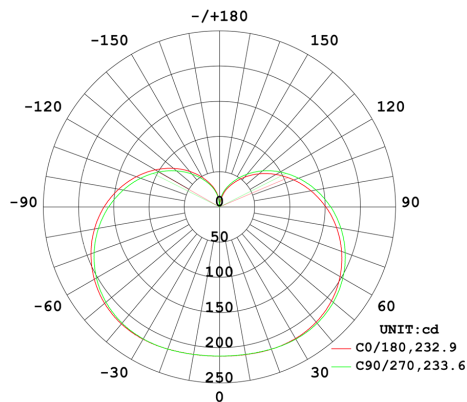

Features

- Replacement for High-output Incandescent or lower wattage metal halide and high pressure sodium lamps
- Rated for use in enclosed and open fixtures in dry or damp locations
- Ideal for post top, bollards, and outdoor corridor lighting
- Suitable for use in a base-up or base-down position

Ordering Matrix

Family	Wattage	Base Type	CRI/Color Temp	Dimmable
A19	16	GU24	830	DIM
	5 = 5W 9 = 9W 10 = 10W 13 = 13W 15 = 15W 16 = 16W 23 = 23W	E26 = E26 Base GU24 = GU24 Base	850 = 80 CRI, 5000K 840 = 80 CRI, 4000K 835 = 80 CRI, 3500K 830 = 80 CRI, 3000K 827 = 80 CRI, 2700K	DIM = Dimmable DIM 120V = Dimmable