

<b>Project:</b>	<b>Type:</b>	<b>Prepared By:</b>	<b>Date:</b>
-----------------	--------------	---------------------	--------------



**Features and Benefits**

- Produces rich and vibrant colors >90CRI
- Energy efficient replacement for incandescent and halogen lamps
- Constructed from durable plastic which lowers risk of breakage
- Rated for use in enclosed and open fixtures in dry or damp locations
- Frosted lens produces smooth diffuse light
- Longer lifespan compared to legacy equivalents minimizes replacement and maintenance costs
- ENERGY STAR Compliant, Title 20 Compliant
- Dimmable with common dimmer types (check compatibility list)

Technical Specifications		
<b>Performance</b>	<b>Construction</b>	<b>Operating Temperature:</b>
<b>Product Type:</b> A-Line	<b>Bulb Shape:</b> A21	-20°C - 45°C (-4°F - 113°F)
<b>Input Wattage:</b> 15W	<b>Base Type:</b> E26	<b>Dimmable:</b> Yes, down to 10%
<b>Wattage Equivalency:</b> 75W Incandescent	<b>For Use Outdoors in Open Fixtures:</b> No	<b>Input Voltage:</b> 120V
<b>Lumens (Nominal):</b> 1100lm	<b>LED Characteristics</b>	<b>Operating Frequency:</b> 60 Hz
<b>Efficacy:</b> 73 lm/W	<b>Color Temperature:</b> 3000K Warm White	<b>Flicker:</b> <30%
<b>L70 Lifespan:</b> 25,000 Hours	<b>Color Accuracy (CRI):</b> 90 CRI	
	<b>Electrical</b>	
	<b>Power Factor:</b> 0.9	

Technical Specifications (continued)

Optical

Beam Angle:

230°

Other

Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of four (4) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

Compliance

UL Listed:

Yes

ENERGY STAR V2.0:

This product is ENERGY STAR® Version 2.0 Certified

Energy Star ID:

2330074


California Energy Commission (CEC) Status:

Lawful for sale in California

Case and Pallet Dimensions

	QTY	LENGTH (in)	WIDTH (in)	HEIGHT (in)
CASE	12	13.6	10.3	6.2
PALLET	2160	41.1	34.2	49.8

Dimension

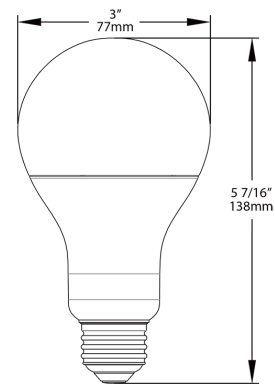

Light Distribution

