

Project:	Туре:
Prepared By:	Date:

Technical Specifications

Performance L70 Lifespan: LED Characteristics

Product Type: 15,000 Hours Color Temperature:

DecorativeConstruction2700K Soft WhiteInput Wattage:Bulb Shape:Color Accuracy (CRI):

3W B11 90 CRI
Wattage Equivalency: Finish: Electrical

Wattage Equivalency: Finish: Electrical

40W Incandescent Frosted Frosted Paymer Factors

40W Incandescent Frosted Power Factor:
Lumens (Nominal): Base Type: 0.7

300lmE26Operating Temperature:Efficacy:For Use Outdoors in Open Fixtures:-20°C - 45°C (-4°F - 113°F)

91 lm/W

Technical Specifications (continued)

Electrical

Dimmable:

Yes, down to 10%

Input Voltage:

120V

Flicker:

<30%

Optical

Beam Angle:

360°

Other

Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of three (3) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Compliance

ETL Qualified:

Yes

ENERGY STAR V2.0:

This product is ENERGY STAR® Version 2.0 Certified

Energy Star ID:


2330346


California Energy Commission (CEC) Status:

Lawful for sale in California

Case and Pallet Dimensions

	QTY	LENGTH (in)	WIDTH (in)	HEIGHT (in)
CASE	12	6.5	4.9	4.7
PALLET	3180	38.4	46.3	39.4

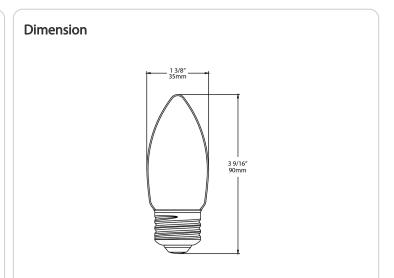

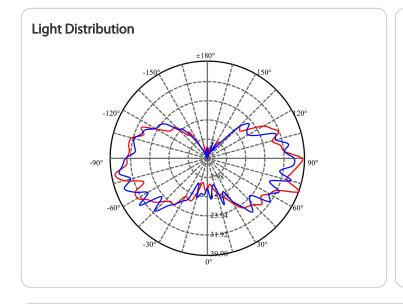

Features

Replacement for conventional decorative lamps

Filament LED construction gives a unique traditional look and feel for decorative and ambient applications

Produces rich and vibrant colors, >90CRI

Rated for use in enclosed and open fixtures in dry and damp locations

Longer lifespan compared to legacy equivalents minimizes replacement and maintenance costs

Title 20 Compliant, ENERGY STAR Compliant, UL Listed

Smooth uniform dimming down to 10% (check dimmer compatibility list)

Ordering Matrix

Family	Wattage	Base Type	CRI/Color Temp	Type	Finish
B11	3	E26	927	F	F
	3 = 3W	E12 = E12	940 = 90 CRI, 4000K	F = Filament	C = Clear
	5 = 5W	E26 = E26	930 = 90 CRI, 3000K		$\mathbf{F} = \mathbf{Frosted}$
			927 = 90 CRI, 2700K		