

Project:	Туре:
Prepared By:	Date:

Technical Specifications

Performance L70 Lifespan: LED Characteristics

Product Type: 15,000 Hours Color Temperature:

Decorative Construction 2700K Soft White
Input Wattage: Bulb Shape: Color Accuracy (CRI):

3W G16.5 90 CRI

Wattage Equivalency: Finish: Electrical

40W Incandescent Clear Power Factor:
Lumens (Nominal): Base Type: 0.7

350lm E26 Operating Temperature:

Efficacy: For Use Outdoors in Open Fixtures: -20°C - 45°C (-4°F - 113°F)
92 lm/W
No

Technical Specifications (continued)

Electrical

Dimmable:

Yes, down to 10%

Input Voltage:

120V

Flicker:

<30%

Optical

Beam Angle:

360°

Other

Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of three (3) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Compliance

ETL Qualified:

Yes

ENERGY STAR V2.0:

This product is ENERGY STAR® Version 2.0 Certified

Energy Star ID:

2330344


California Energy Commission (CEC) Status:


Lawful for sale in California

Case and Pallet Dimensions

	QTY	LENGTH (in)	WIDTH (in)	HEIGHT (in)
CASE	12	9	6.8	4.3
PALLET	1620	39.1	45.7	36.2

Dimension



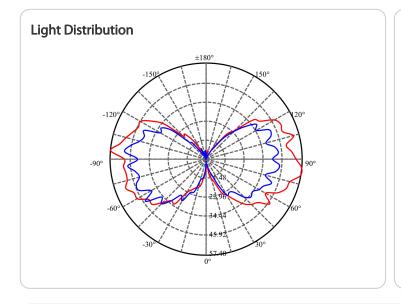

Features

Replacement for conventional decorative lamps

Filament LED construction gives a unique traditional look and feel for decorative and ambient applications

Produces rich and vibrant colors, >90CRI

Rated for use in enclosed and open fixtures in dry and damp locations

 $Longer\ lifespan\ compared\ to\ legacy\ equivalents\ minimizes\ replacement\ and\ maintenance\ costs$

Title 20 Compliant, ENERGY STAR Compliant, UL Listed

Smooth uniform dimming down to 10% (check dimmer compatibility list)

Ordering Matrix

	Family	Wattage	Base Type	CRI/Color Temp	Type	Finish
	G16.5	3	E26	927	F	С
		3 = 3W	E12 = E12 E26 = E26	950 = 90 CRI, 5000K 927 = 2700K	F = Filament	C = Clear F = Frosted