

Project: Type: **Prepared By:** Date:



#### **Features and Benefits**

Replaces 18W/26W/32W G24d & G24q CFL Lamps

Ballast Bypass. Integral Driver enables lamp to be wired directly to line voltage without need for an external driver or ballast

Compatible with G24d / GX24d & G24q / GX24q installations

50,000 hour Lifespan

Environmentally friendly, no mercury used

**UL** Classified

Rated for use in enclosed and open fixtures in dry or damp locations

Non-Dimmable

5 Year No Compromise Warranty

### **Technical Specifications**

L70 Lifespan:

Performance Construction THD: **Product Type: Bulb Shape:** PLC Compact

Input Wattage: Finish: 9W Frosted

Wattage Equivalency: Base Type:

26W Fluorescent G24d Lumens (Nominal): For Use Outdoors in Open Fixtures:

1000lm No

Efficacy: **LED Characteristics** 

111 lm/W **Color Temperature:** 

50,000 Hours Color Accuracy (CRI):

82 CRI

4000K Cool White

**Electrical** 

<20%

**Power Factor:** 

0.9

**Operating Temperature:** 

-20°C - 45°C (-4°F - 113°F)

Dimmable:

No

Input Voltage:

120-277V AC



## **Technical Specifications (continued)**

**Electrical** 

**Operating Frequency:** 

50/60Hz

Other

Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Installation

Installation Type:

Type B, Ballast Bypass

**Installation Orientation:** 

Horizontal

Compliance

**UL Recognized:** 

Yes

**UL Classified:** 

Yes

California Energy Commission (CEC) Status:


Lawful for sale in California

Application:

Suitable for damp locations and totally enclosed fixtures.

#### **Case and Pallet Dimensions**

	QTY	LENGTH (in)	WIDTH (in)	HEIGHT (in)
CASE	12	6.5	4.9	7.1
PALLET	4032	47.2	39.4	49.6

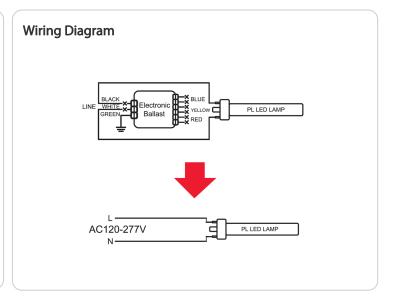

# PLC-9-H-840-BYP



