

| | | | |
|-----------------|--------------|---------------------|--------------|
| Project: | Type: | Prepared By: | Date: |
|-----------------|--------------|---------------------|--------------|



Features and Benefits

- Direct Replacement for Fluorescent Lamps: F32T8/32W, F32T8/30W, F32T8/28W, F32T8/25W
- Easy to install plug and play that requires no rewiring, no tools, no instructions
- 50,000 hour Lifespan
- Rated for use in enclosed and open fixtures in dry or damp locations
- Diffused frosted lens will maintain the same light quality over time
- Compatible with most instant start electronic T8 ballasts, Please check Compatibility List
- Approximately 40% more efficient than fluorescent T8 lamps
- Instant on full brightness
- Environmentally friendly, no mercury used
- NSF Listed: NSF/ANSI Standard 2 - Food Equipment - Splash Zone (Not for Direct Food Zone without additional fixture considerations)
- Compatible with RAB specified 0-10V dimming system

Technical Specifications

| Performance | Construction | LED Characteristics |
|--|---|--|
| Product Type: Linear | Material: Coated Glass | Color Temperature: 4000K Cool White |
| Input Wattage: 10.5W | Bulb Shape: T8 | Color Accuracy (CRI): 80 CRI |
| Lumens (Nominal): 1800lm | Nominal Length: 4 FT | Electrical |
| Efficacy: 171 lm/W | Finish: Frosted | THD: ≤25% |
| L70 Lifespan: 50,000 Hours | Base Type: G13 | Power Factor: Ballast Dependent |
| Wattage Equivalency: 32W Fluorescent | For Use Outdoors in Open Fixtures: No | Operating Temperature: -20°C - 45°C (-4°F - 113°F) |

Technical Specifications (continued)

Electrical

Dimming:

Yes with 0-10V dimmer & plus ballast. See Dimmer Compatibility List.

Input Voltage:

Ballast Dependent

Operating Frequency:

Ballast Dependent

Input Current @ 120V:

Ballast Dependent

Input Current @ 277V:

Ballast Dependent

Flicker:

Ballast Dependent

Other

Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Installation

Installation Type:

Type A, Plug and Play

Compliance

UL Listed:

Yes

NSF Listed:

Meets NSF/ANSI standards for use in Food Zone (non-contact), Splash, and Non-Food Zones. Tube guard required in open fixtures.

DLC Model Number:

T10011

California Energy Commission (CEC) Status:

Lawful for sale in California

Application:

Suitable for damp locations and totally enclosed fixtures.

DLC Listed:

This product is on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from DLC Member Utilities. Designed to meet DLC 5.1 requirements. DLC Product Code: PC31UUKD

Optical

Beam Angle:

180°


Ballast Performance

| | 0.78BF | 0.88BF | 1.88BF |
|------------------|--------|--------|--------|
| Lumens | 1520 | 1800 | 2250 |
| System Power (W) | 11 | 13 | 16.5 |


Case and Pallet Dimensions

| | QTY | LENGTH (in) | WIDTH (in) | HEIGHT (in) |
|--------|-----|-------------|------------|-------------|
| CASE | 25 | 49.4 | 7.7 | 7.5 |
| PALLET | 625 | 43.3 | 40.6 | 51.2 |

Wiring Diagram

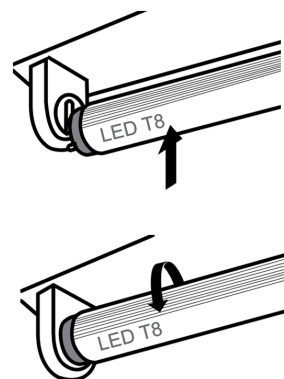

Dimension

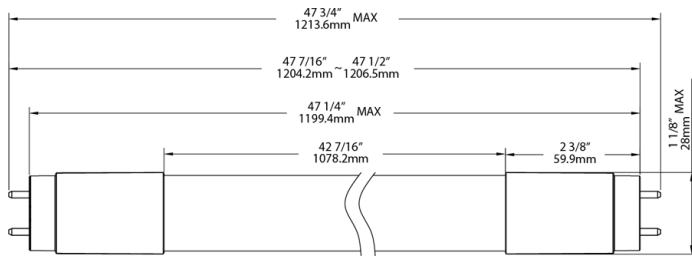

Light Distribution

