


PRODUCT SUBMITTAL 503

Product: **RAILFIX™ Fixing Rail**
Date: **18 January 2018 (supersedes 06 May 2013)**



1/2 and 5/8 in. RAILFIX

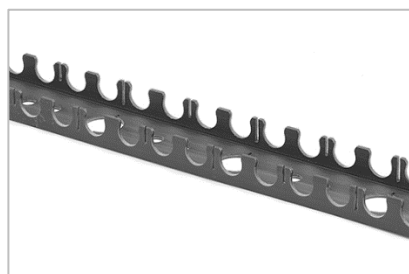

3/4 in. RAILFIX

Article No.	Description	Slot Spacing in.	Unit Weight lb (g)
259238-2M	1/2 in. RAILFIX Fixing Rail – 6.5 ft (2 m)	1	1.06 (480)
266247-002	5/8 in. RAILFIX Fixing Rail – 6.5 ft (2 m)	1	1.12 (510)
266257	3/4 in. RAILFIX Fixing Rail – 6.5 ft (2 m)	2	1.36 (620)

TECHNICAL DESCRIPTION

Material	Thermoplastic polymer material, recycled, extruded and punched
Height / Width	1/2 in. RAILFIX: 1 x 1 1/2 in (2.5 x 3.8 cm) 5/8 in. RAILFIX: 1 x 1 1/2 in (2.5 x 3.8 cm) 3/4 in. RAILFIX: 1 x 2 in (2.5 x 5.1 cm)

FUNCTIONAL DESCRIPTION

REHAU RAILFIX is an efficient and durable fastening device for holding RAUPEX® pipes in radiant and SIM applications. RAILFIX reduces installation time for more economical pipe installation. It also provides rapid installation of RAUPEX pipe in a thermal mass or in a sand bed and with certain wall/ceiling applications. Evenly spaced pipe-holding slots allow for consistent pipe spacing of RAUPEX pipes without measuring. Slots provide secure holding of pipes without damage.

RAILFIX sections are pre-drilled on the base for fastening to foam insulation with REHAU plastic holding pins (Art. 259268) or to wood or masonry with screws or other appropriate fasteners (not included). Vertical notches allow sections to be broken by hand to fit required length. Follow all published installation instructions.

For updates to this publication, visit na.rehau.com/resourcecenter

The information contained herein is believed to be reliable, but no representations, guarantees or warranties of any kind are made as to its accuracy, suitability for particular applications or the results to be obtained therefrom. Before using, the user will determine suitability of the information for user's intended use and shall assume all risk and liability in connection therewith.

© 2018 REHAU