



The new degree of comfort.®

# Marathon® Eclipse™ Light Duty Non-Metallic Electric Water Heaters

With easy field-level conversion for multiple light duty applications

## BUILT TO LAST

- Backed by a 10-year limited tank warranty<sup>1</sup>
- Save up to \$4000 in replacement costs<sup>2</sup>
- Terminal block with fused & non-fused configurations
- Unmatched strength & durability
- Rust & corrosion proof
- Perfect for high temperature applications
- Factory shipped in simultaneous configuration

FEATURES & BENEFITS			
Terminal Block	Easy to convert standard models from simultaneous to non-simultaneous, single phase to three phase		
	Available on all models		
High Efficiency Savings	Polyurethane insulation reduces energy consumption and standby heat loss		
	Pipe wrap kit included to achieve maximum energy savings		
Unmatched Strength & Durability	Non-metallic, seamless, blow-molded polybutene inner tank protects against rust and corrosion		
	Multiple layers of filament-wound fiberglass give the tank unmatched strength		
	Recessed brass drain valve is out the way of brooms and scrubbers		
	High temperature polysulfone dip tube		
	Tough molded polyethylene outer shell resists dents, scratches, and salt air		
	Titanium upper and lower elements for superior resistance to lime build-up		
Easy Installation & Service	All plastic tank eliminates the need for an anode rod		
	Lightweight tank is easier to maneuver and position		
	Bowl shaped tank bottom allows complete sediment draining		
Water tight grommets protects against overhead moisture and condensation			
PRODUCT PERFORMANCE			
Performance Information	170°F Maximum temperature setting		
	Automatic Temperature Control – Surface mounted thermostat automatically cycles on and off to maintain desired water temperature		
	Low lead compliant		
	Gallon Capacity	First Hour Delivery	Recovery Capacity at 100°F Temp. Rise
	75-Gallon	78 Gallons	49 GPH
85-Gallon	91 Gallons	49 GPH	
105-Gallon	104 Gallons	49 GPH	
Warranty & Other Product Features	Limited Tank Warranty – 10 years, Parts – 1 year <sup>1</sup>		
	Temperature and pressure relief valve included		
	Factory installed vacuum relief valve		
	Standard replacement parts		



## Marathon Eclipse Light Duty

75, 85 and 105-Gallon Capacities  
208/240/277/480 Voltages  
12.1 kW  
Electric



**Safety and Construction** | These products are design certified by Underwriters Laboratories (UL) to meet UL safety standards and UL/NSF 005 as electric storage tank water heaters. All models are North Carolina and Massachusetts Code compliant. **Certified for 150 PSI maximum working pressure.**

<sup>1</sup> See Commercial Warranty Certificate for complete information.

<sup>2</sup> Savings based on 7-year average life of a commercial water heater as defined by NOPR (DOE). Customer will replace 2 tanks for every 1 Eclipse. Replacement tank estimated cost is \$4,000.

See specifications chart on back.





The new degree of comfort.®




All Marathon Eclipse Light Duty models are available in 12.1kW simultaneous configurations with terminal block in both fused and non-fused configurations. All water heaters with power requirements over 48 Amps come Standard in the fused configuration.

### Marathon® Eclipse™ Light Duty Specifications

DESCRIPTION			FEATURES		ROUGHING IN DIMENSIONS (SHOWN IN INCHES)			
T Y P E	GALLON CAPACITY	MODEL NUMBER	RECOVERY IN G.P.H. 100° F RISE**	FIRST HOUR DELIVERY G.P.H.	TANK HEIGHT A	HEIGHT TO WATER CONN. B	DIAMETER C	APPROX. SHIP WT. (LBS.)
Tall	75	MELD75-TB/FTB	49	78	58-5/8	62-5/8	28-1/4	128
Tall	85	MELD85-TB/FTB	49	91	66-1/4	70-1/4	28-1/4	140
Tall	105	MELD105-TB/FTB	49	104	66-3/4	70-3/4	30-1/4	152

\*\*Recovery Capacity is based upon a 100° F water temperature rise and calculated per ANSI Z21.10.3 standards

- Maximum test pressure: 300 PSI; Maximum working pressure: 150 PSI
- All models are factory shipped with sim configuration

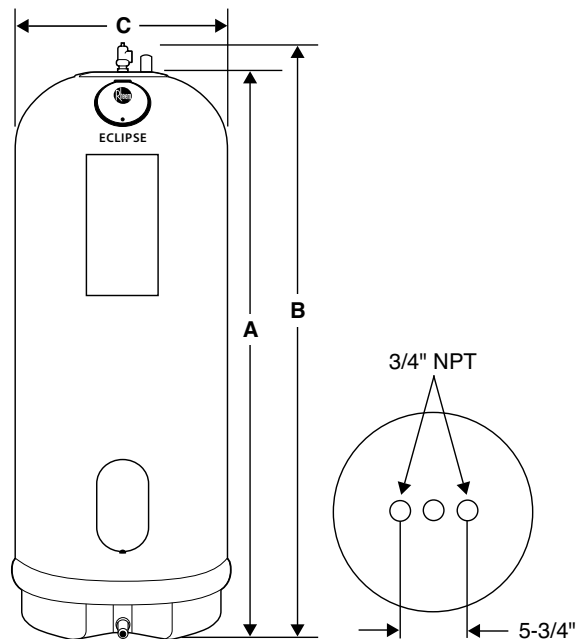

### Recommended Specifications (for trade reference only)

Water heater(s) shall be model \_\_\_\_\_, manufactured by Rheem, having electrical input of \_\_\_\_\_ kW and a recovery rate of \_\_\_\_\_ GPH at a 100°F temperature rise. Water heater(s) shall have a storage capacity of \_\_\_\_\_ gallons.

Water heater tank shall be seamless, blow-molded, polybutene surrounded by filament wound fiberglass and rigid polyurethane foam encased in a molded polyethylene outer shell. Water heater shall have a maximum weight of 160 lbs and include a terminal block for non-sim / sim

conversions. Water heater(s) shall have the UL seal of certification and be factory equipped with an CSA/ASME rated temperature and pressure relief valve. Water heater(s) shall meet or exceed the energy factor requirements of ASHRAE. Tanks shall have a working pressure rating of 150 psi, and shall be completely assembled. Water heater(s) shall be equipped with titanium sheath elements. Tank shall be insulated with 2-1/2" of rigid polyurethane foam insulation. Water heater(s) shall be equipped with surface mounted thermostats each with an integral, manual reset, high limit control. Water heater(s) shall be covered by a ten year limited warranty against tank leaks.

In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice.

Rheem Water Heating • 1115 Northmeadow Parkway, Suite 100  
Roswell, Georgia 30076 • www.rheem.com

Rheem Canada Ltd./Ltée • 125 Edgeware Road, Unit 1  
Brampton, Ontario L6Y 0P5 • www.rheem.ca

