


PowerVent Gas 75,000 BTU/HR.



Standard Features:

- Uses 3" or 4" schedule 40 PVC, CPVC or ABS pipe
- Vents up to 95 feet
- Easy to install/maintain blower assembly
- Spark-to-pilot ignition system
- Low NOx burner
- Self-diagnostic thermostat/gas valve
- 2" rigid foam insulation
- 3 year limited warranty
- Factory installed AGA/ASME rated T&P relief valve
- Certified for a 150 PSI maximum working pressure
- Durable brass drain valve
- FVIR compliant

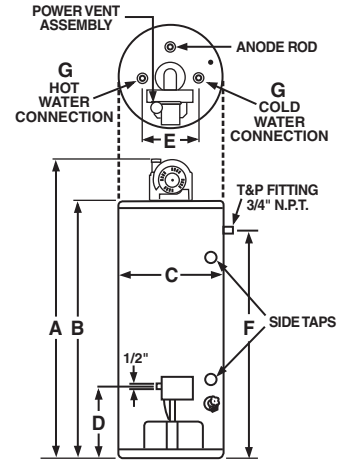

DIMENSIONAL INFORMATION (All dimensions shown in inches)								
MODEL NUMBER	A	B	C	D	E	F	G	APPROX. SHIPPING WEIGHT (LBS.)
GPV75-75FV-2	72	60-1/8	26-1/4	14-3/4	11	53-1/4	1	330

RECOVERY CAPACITIES										
MODEL NUMBER	INPUT BTU/HR. NATURAL & L.P.	TEMPERATURE RISE - DEGREES F - GALLONS PER HOUR								
		40°	50°	60°	70°	80°	90°	100°	110°	120°
GPV75-75FV-2	75,000	173	138	115	99	86	77	69	63	58
GPV75-75PFV-2	70,000	161	129	107	92	81	72	64	59	54