




## MINI-SPLIT INTERCONNECT CAB14 CABLE DATA SHEET

www.rectorseal.com

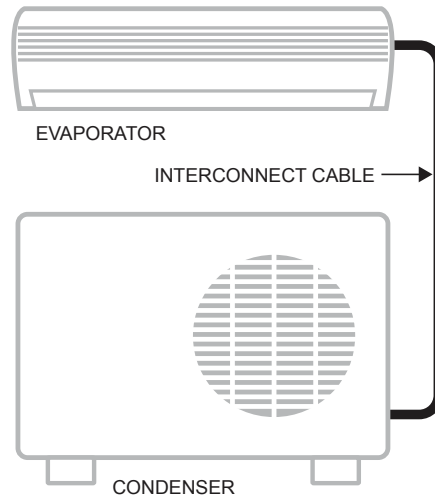

**14/4 AWG Class B stranded bare copper per ASTM B-3 and B-8  
Use to connect condenser to evaporator for mini-split installations.**

### SPECIFICATIONS:

**Gauge** - 14

**Voltage Rating**- 600V, Max

**Insulation** - Premium grade PVC plus nylon

**Outside Diameter** - 0.370

**Color code** - ICEA Method1, Table E-2

**Shielding** - Overall 100 percent

**Jacket** - Black sunlight & moisture resistant PVC

**Temperature Range** - -30° to 90° 90° dry 75° wet

**Oil resistsants** - Oil Res 1

**Sunlight resistant** - Yes

**Direct Burial** - Yes

UL Standard 1277 Type TC-ER\*, UL Standard 13  
Type PLTC, UL Standard 1424 Type FPL, UL  
Standard 1425 Type NPLF

UL Standard 83 Type THHN/THWN

NEC Articles 336, 725, 760

EPA 40 CFR, Part 26, Subpart C, heavy metals  
per Table 1, TCLP method

### ORDERING INFORMATION:

Model - CAB144100 (100ft) - 87790

Model - CAB14450 (50ft) - 87795