

ASSEMBLY INSTRUCTION

8XRVL or C

WALL MOUNT KITCHEN BRIDGE FAUCET WITH HAND SPRAY



8XRVL




8XRVC

REMOVAL OF FAUCET:

Always turn the water supply off before removing the existing faucet or disassembling a valve. Open both faucet handles to relieve water pressure and to ensure that the water has been successfully turned off.

CARE OF FAUCET:


The use of warm water and a soft cloth is all that is required to clean Rubinet products. The patina of our living finishes (Oil Rubbed Bronze & Tuscan Brass) will change as a result of normal use. Applying Mineral Oil on occasion will create a softer look, subtle color changes and character.

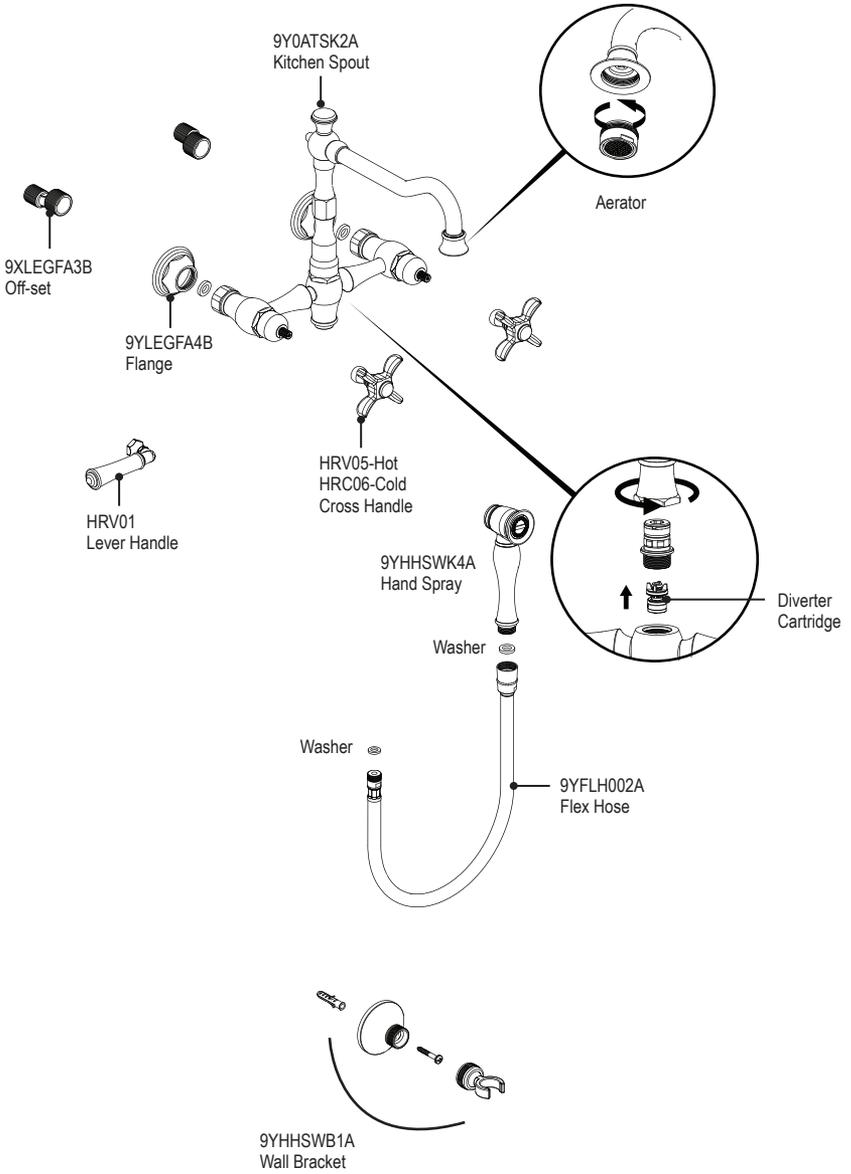


1

PIPE CLAMP
RECOMMENDED
FOR ROUGH-IN


Hole Size
Ø 1 1/4"

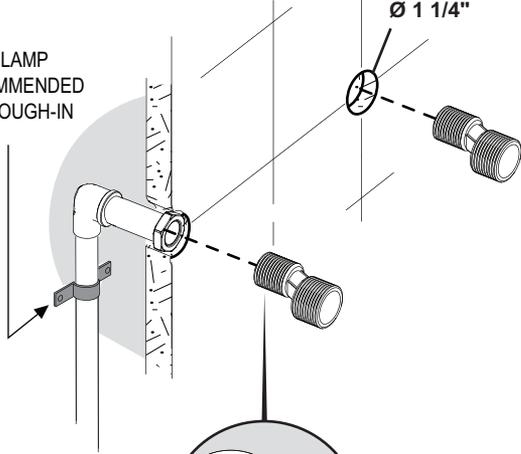



APPLY THREAD SEALING TAPE





ADJUSTABLE 3/4" [19] - 1/2" [12]
OFFSETS WHICH ALLOW
3/8" [10] MOVEMENT
EITHER SIDE

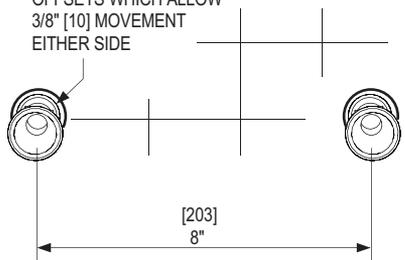


2

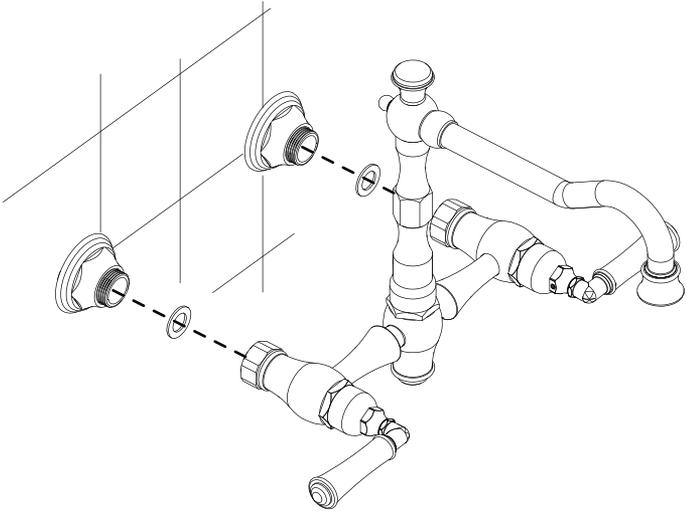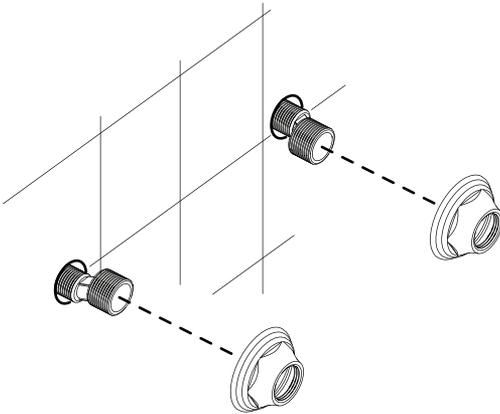



3

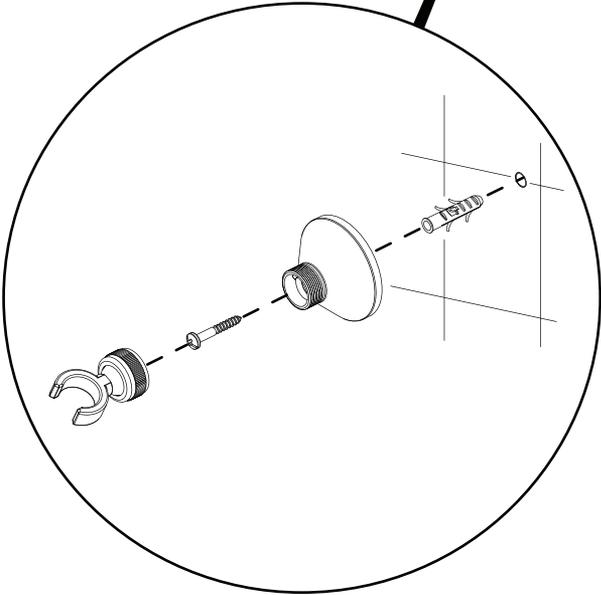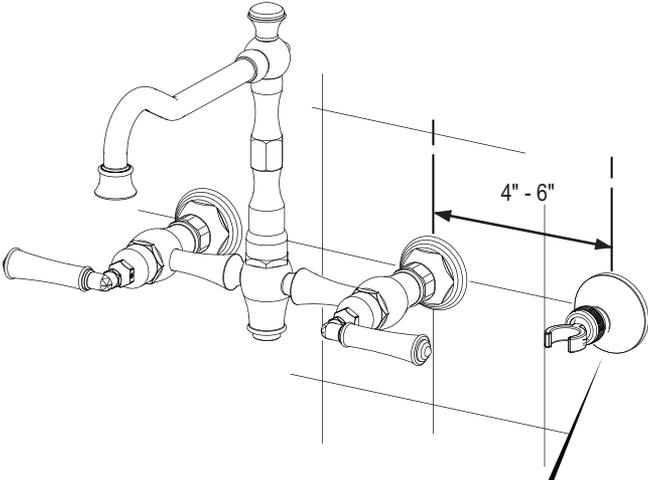

4

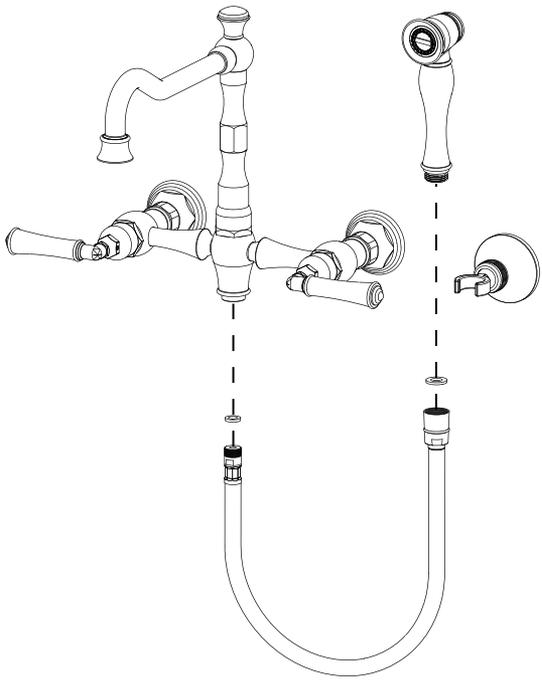

5

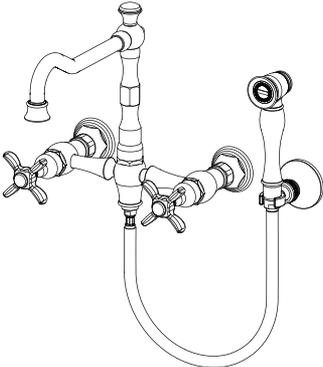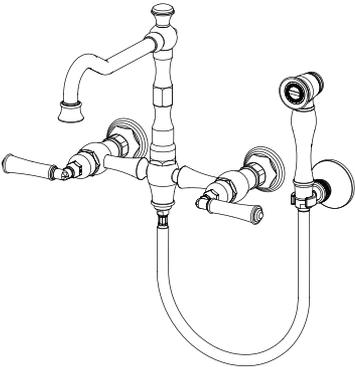


FEATURES:

- Brass construction with choice of 21 finishes
- Two handles, Swivel spout and Hand Spray
- Quarter-turn, ceramic disc cartridges
- Wall Mount Offsets for easy alignment
- 1.6 gpm @ 60 psi (Helps meet CalGreen regulation)

APPROVAL:

- AB1953 / NSF61
- ASME A 112.18.1
- CSA B125.1

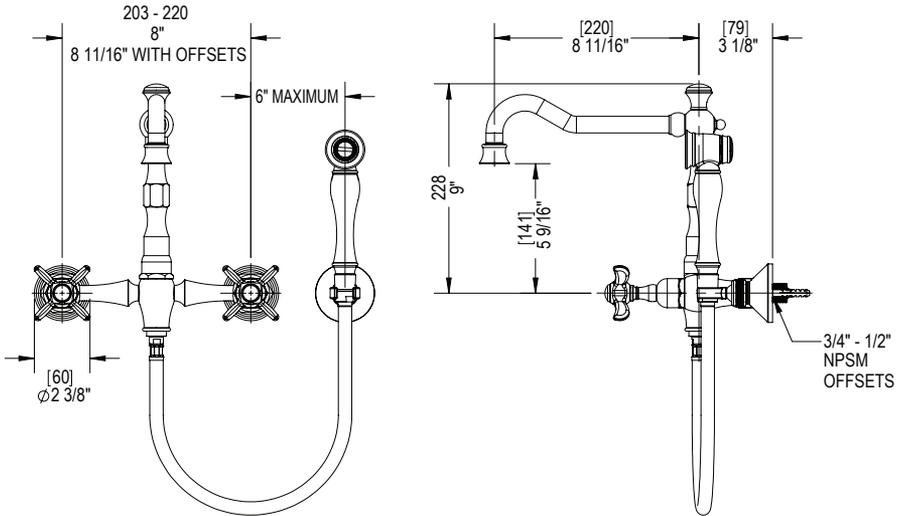

CONTACT US:

If you need assistance with installation, replacement parts or have any questions regarding your Rubinet product, please call a Customer Service representative at: 905-851-6781 toll free 1-800-461-5901 or visit www.rubinet.com