

ASSEMBLY INSTRUCTION

1JLAL

INSTALLING THE 1JLAL FAUCET



1JLAL

REMOVAL OF FAUCET:

Always turn the water supply off before removing the existing faucet or attempting to install. Open both faucet handles to release water pressure and to ensure that the water has been successfully turned off.



CARE OF FAUCET:

Because of our water and eco-friendly it all that is required to clean Rubinet products. The polish of our high finishes (316 Stainless Steel & Acorn Brass) will change as a result of normal use. Applying Mineral Oil or mineral oil grade neutral food grade oil will change your clean.



CONTACT US:



If you need assistance with installation, replacement parts or have any questions regarding your Rubinet product, please call a Customer Service representative at 905-851-5701 toll free 1-800-461-5881 or visit www.rubinet.com

1

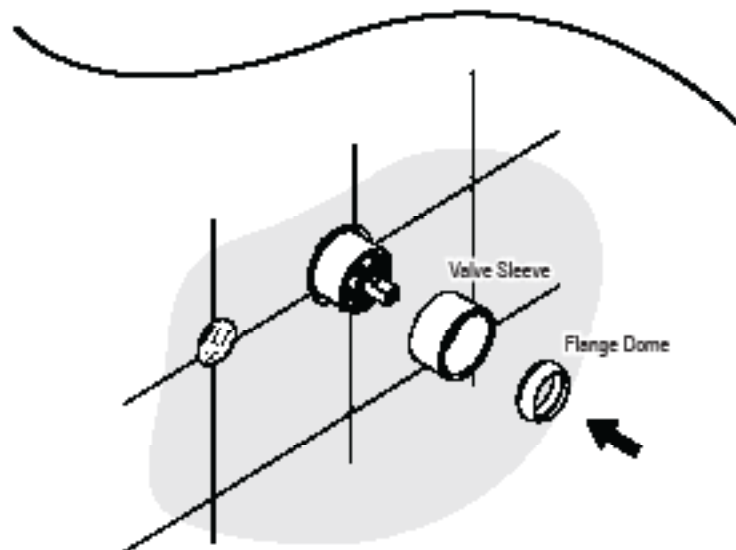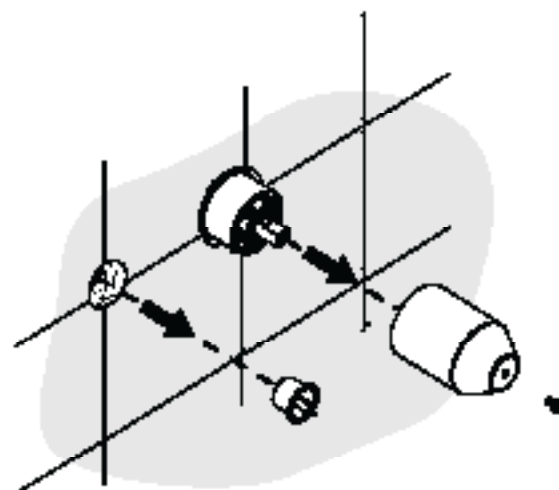




2

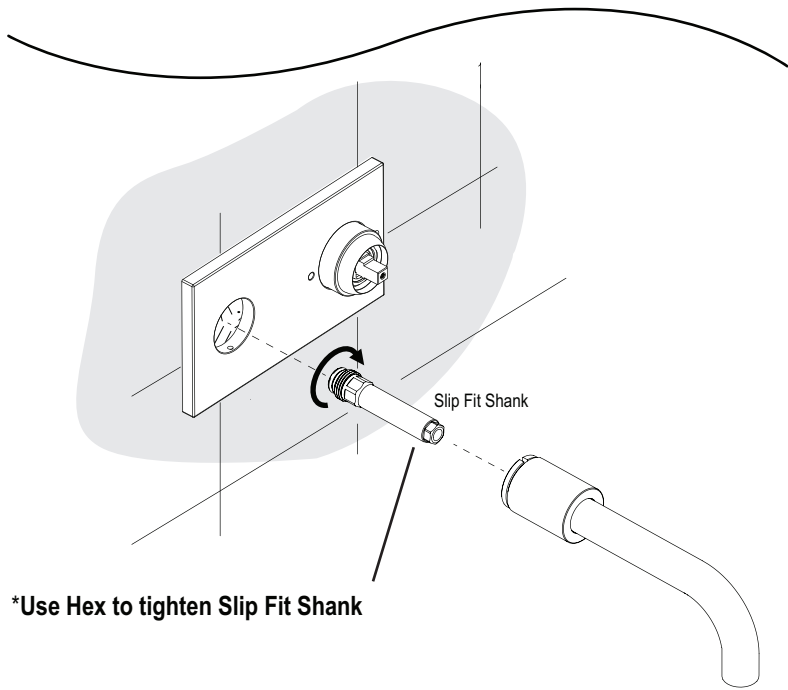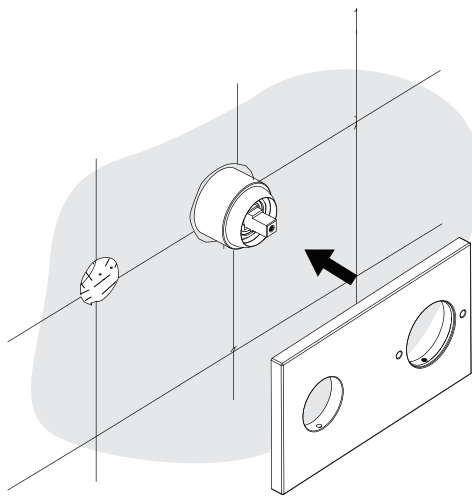

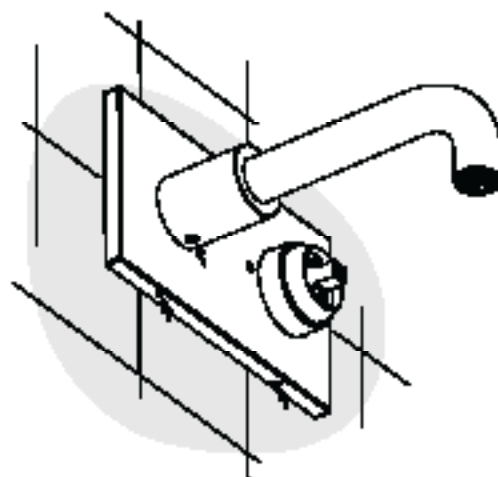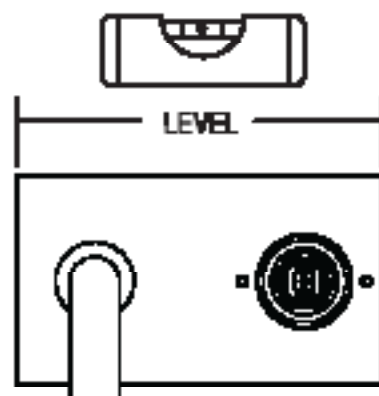

Tighten set screws to secure
plate & spout

4

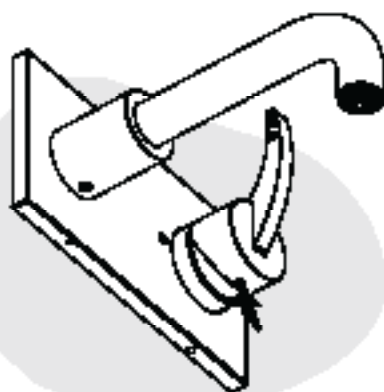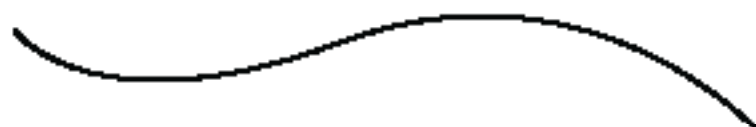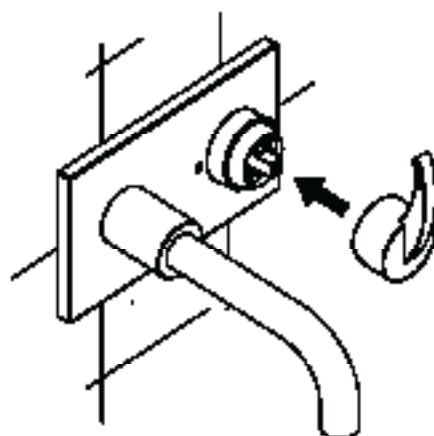

Tighten set screws to
secure handle

*** Acuator Removal**