

CODE NUMBER

20201004

DESCRIPTION

ST-2029 Water Closet and GEM-2 111 Flushometer.

COMPONENTS

Flushometer: Code 3070026Water Closet: Code 2102029

DETAILS

• Flush Volume: 1.28 gpf (4.8 Lpf)

• Nominal Dimensions: 25 ½" × 16 1/125" × 17" (641 × 407 ×

432mm)

FLUSHOMETER FEATURES

• Fixed Volume Piston with Filtered O-ring Bypass

- ADA Compliant Metal Oscillating Non-Hold-Open Handle
- Control Stop Plug
- Vacuum Breaker Flush Connection
- Spud Coupling, Wall and Spud Flanges for 11/2" Top Spud
- Cast Set Wall Flange with Set Screw
- Sweat Solder Adaptor with cover tube
- Non-Hold-Open Handle and No External Volume Adjustment to Ensure Water Conservation
- Handle Packing, Stop Seat and Vacuum Breaker Molded from PERMEX® Rubber Compound for Chloramine Resistance
- 1" I.P.S. Screwdriver Bak-Chek® Angle Stop

FIXTURE FEATURES

- White Vitreous China
- Elongated bowl
- Floor mounted, floor outlet
- Siphon jet flushing action achieves 1000g Map score when used with any Sloan flushometer
- Water spot area: 101/8" x 93/8" (26 cm x 24 cm)
- 1½" I.P.S. top spud inlet
- 21/8" fully glazed trapway
- Closet bolts and caps included
- Toilet seat not included



COMPLIANCES & CERTIFICATIONS















WaterSense Listed, EPD, HPD) **DOWNLOADS**

- HET Wall Hung Installation Instructions
- SS/ST/SU/WETS/WEUS Fixtures Repair and Maintenance Guide

(ADA Compliant, cUPC Green Certified, BAA Compliant, CEC

Compliant, CalGreen Compliant, Satisfies LEED Credits,


Additional Downloads


NOTES

All information contained within this document subject to change without notice.



ROUGH-IN



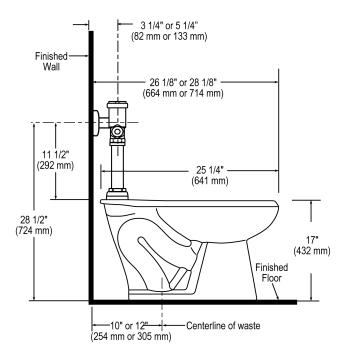

Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com